
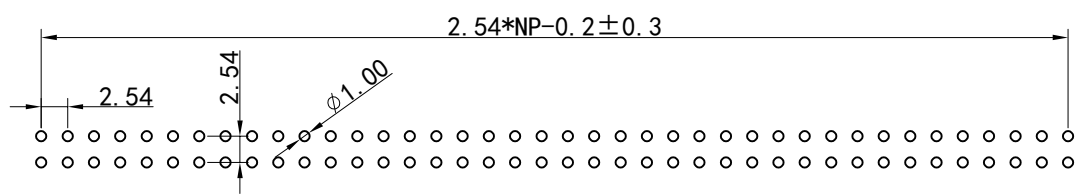
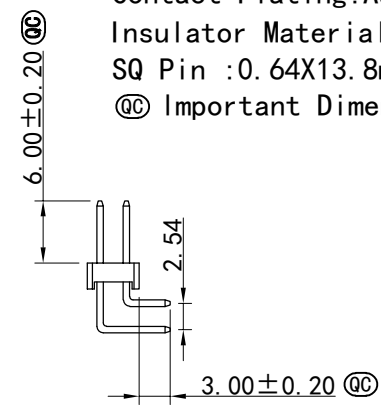


REV.	SPECIFICATION	ECN NO.	APPD.

SPECIFICATIONS

Current Rating:3A
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstand Voltage:600V AC/minute
 Operation Temperature:-40℃ to +105 ℃
 Contact Material: Brass
 Contact Plating: Au or Sn over 50u"Ni
 Insulator Material:PBT/PA6T (UL94V-0)
 SQ Pin :0.64X13.8mm 0.64X18.8mm
 Ⓞ Important Dimensions

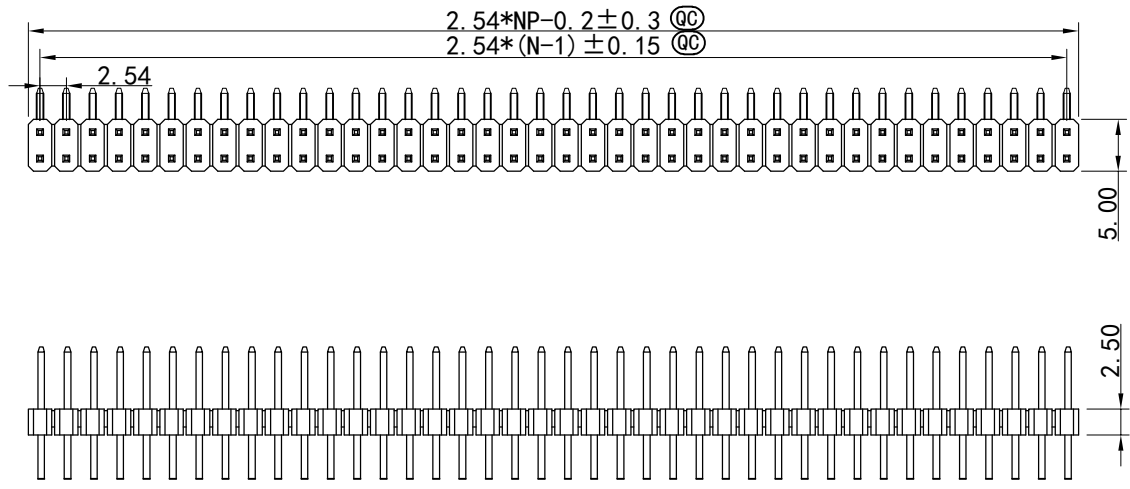

**RECOMMENDED PCB LAYOUT
 COMPONENT SIDE VIEW**

Series 2012 - 2 X xx G 00 L B
 2:Double Row
 Pin number of each row:
 01~40Pin
 G:Gold Plated
 T:Tin Plated
 B: Bulk Package
 L: Inflection
 00:Gold Flash
 10: 10u"
 15: 15u"
 30: 30u"
 Blank: for Tin & Matte Tin Plated

Tolerances	Dwg. No.	2012D01002		Title:	2012系列 双排排针 间距 2.54mm 2xNP 反弯 PA6.0 PC3.0 L=13.8/18.8 PBT 镀金GF ①535	 深圳市格林柏电子技术开发有限公司 P/N: 2012-2XxxGOOLB		
	.x = ±0.30	Projection						
.xx = ±0.20	Unit	mm	Scale	1:1				
	Drawn By	Martin 06/20'23						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [WingTAT](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)