


Recommended Card Layout

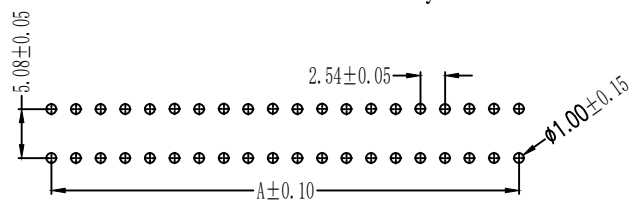

Recommended Card Layout

Order Information

E D xxx B GF BK

E=2.54mm FEMALE EDGE SLOT  
 D=DIP STRAIGHT 180°  
 NO. OF PINS:04-128  
 B=Brass + PBT  
 P=Phosphor Bronze + PBT

BK=Black  
 GN=Green  
 BU=Blue  
 GF=1u" Glod Flash  
 03=3u" Glod  
 05=5u" Glod  
 10=10 u" Glod  
 15=15 u" Glod  
 A3=3u" All Glod

SPECIFICATION

Current Rating:3A  
 Dielectric Withstanding Voltage:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max  
 Insulation Resistance:5000 Megaohms Min. At 500V DC  
 Operation Temperature:-55°C~+125°C  
 Insertion Force:0.4Kgf Max. Per Pair  
 Withdrawal Force:0.25Kgf Max. Per Pair

Insulator:PBT+G.F. (UL94V-0)  
 Contact:Brass or Phosphor Bronze  
 Gold Plated On Contact Area  
 Tin Plated On Solder Tails, Over Nickel

RoHS Compliant

| Pin | A     | B     | C     | D     | Pin | A      | B      | C      | D      |
|-----|-------|-------|-------|-------|-----|--------|--------|--------|--------|
| 4   | 2.54  | 7.92  | 11.37 | 9.62  | 64  | 78.74  | 84.12  | 87.57  | 85.82  |
| 6   | 5.08  | 10.46 | 13.91 | 12.16 | 66  | 81.28  | 86.66  | 90.11  | 88.36  |
| 8   | 7.62  | 13    | 16.45 | 14.7  | 68  | 83.82  | 89.2   | 92.65  | 90.9   |
| 10  | 10.16 | 15.54 | 18.99 | 17.24 | 70  | 86.36  | 91.74  | 95.19  | 93.44  |
| 12  | 12.7  | 18.08 | 21.53 | 19.78 | 72  | 88.9   | 94.28  | 97.73  | 95.98  |
| 14  | 15.24 | 20.62 | 24.07 | 22.32 | 74  | 91.44  | 96.82  | 100.27 | 98.52  |
| 16  | 17.78 | 23.16 | 26.61 | 24.86 | 76  | 93.98  | 99.36  | 102.81 | 101.06 |
| 18  | 20.32 | 25.7  | 29.15 | 27.4  | 78  | 96.52  | 101.9  | 105.35 | 103.6  |
| 20  | 22.86 | 28.24 | 31.69 | 29.94 | 80  | 99.06  | 104.44 | 107.89 | 106.14 |
| 22  | 25.4  | 30.78 | 34.23 | 32.48 | 82  | 101.6  | 106.98 | 110.43 | 108.68 |
| 24  | 27.94 | 33.32 | 36.77 | 35.02 | 84  | 104.14 | 109.52 | 112.97 | 111.22 |
| 26  | 30.48 | 35.86 | 39.31 | 37.56 | 86  | 106.68 | 112.06 | 115.51 | 113.76 |
| 28  | 33.02 | 38.4  | 41.85 | 40.1  | 88  | 109.22 | 114.6  | 118.05 | 116.3  |
| 30  | 35.56 | 40.94 | 44.39 | 42.64 | 90  | 111.76 | 117.14 | 120.59 | 118.84 |
| 32  | 38.1  | 43.48 | 46.93 | 45.18 | 92  | 114.3  | 119.68 | 123.13 | 121.38 |
| 34  | 40.64 | 46.02 | 49.47 | 47.72 | 94  | 116.84 | 122.22 | 125.67 | 123.92 |
| 36  | 43.18 | 48.56 | 52.01 | 50.26 | 96  | 119.38 | 124.76 | 128.21 | 126.46 |
| 38  | 45.72 | 51.1  | 54.55 | 52.8  | 98  | 121.92 | 127.3  | 130.75 | 129    |
| 40  | 48.26 | 53.64 | 57.09 | 55.34 | 100 | 124.46 | 129.84 | 133.29 | 131.54 |
| 42  | 50.8  | 56.18 | 59.63 | 57.88 | 102 | 127    | 132.38 | 135.83 | 134.08 |
| 44  | 53.34 | 58.72 | 62.17 | 60.42 | 104 | 129.54 | 134.92 | 138.37 | 136.62 |
| 46  | 55.88 | 61.26 | 64.71 | 62.96 | 106 | 132.08 | 137.46 | 140.91 | 139.16 |
| 48  | 58.42 | 63.8  | 67.25 | 65.5  | 108 | 134.62 | 140    | 143.45 | 141.7  |
| 50  | 60.96 | 66.34 | 69.79 | 68.04 | 110 | 137.16 | 142.54 | 145.99 | 144.24 |
| 52  | 63.5  | 68.88 | 72.33 | 70.58 | 112 | 139.7  | 145.08 | 148.53 | 146.78 |
| 54  | 66.04 | 71.42 | 74.87 | 73.12 | 114 | 142.24 | 147.62 | 151.07 | 149.32 |
| 56  | 68.58 | 73.96 | 77.41 | 75.66 | 116 | 144.78 | 150.16 | 153.61 | 151.86 |
| 58  | 71.12 | 76.5  | 79.95 | 78.2  | 118 | 147.32 | 152.7  | 156.15 | 154.4  |
| 60  | 73.66 | 79.04 | 82.49 | 80.74 | 120 | 149.86 | 155.24 | 158.69 | 156.94 |
| 62  | 76.2  | 81.58 | 85.03 | 83.28 | 128 | 160.02 | 165.4  | 168.85 | 167.1  |



深圳市格林柏电子技术开发有限公司

|                    |                     |                                   |                               |
|--------------------|---------------------|-----------------------------------|-------------------------------|
| <b>X. ± 0.30</b>   | <b>APPD:</b>        | <b>PART NO:</b><br><br>EDxxxBGFBK | <b>SHEET 4 OF 1</b><br>REV: A |
| <b>.X ± 0.20</b>   | <b>CHKD:</b>        |                                   |                               |
| <b>.XX ± 0.10</b>  | <b>DR:</b>          |                                   |                               |
| <b>.XXX ± 0.05</b> | <b>UNITS:</b><br>mm | <b>SCALE:</b><br>1:1              | <b>DWG NO:</b>                |
| <b>X° ± 1°</b>     |                     |                                   |                               |
| <b>.X° ± 0.5°</b>  |                     |                                   |                               |

| REV | ECN NO | DESCRIPTION | DATE |
|-----|--------|-------------|------|
|     |        |             |      |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Card Edge Connectors](#) category:*

*Click to view products by [WingTAT](#) manufacturer:*

Other Similar products are found below :

[CR7E-30DB-3.96E\(72\)](#) [6565204-6](#) [1437274-4](#) [1-582587-1](#) [284-0102-12100](#) [286-0052-12101A](#) [306022901000000](#) [A6D22DS29C2](#) [1926088-2](#) [245-062-520-350](#) [287-0032-12101](#) [306-028-525-102](#) [307-072-526-202](#) [330-030-500-278](#) [345-060-559-303](#) [534671-1](#) [341-240-317](#) [345-044-500-300](#) [346-240-318](#) [C7D10DS29C1M133](#) [395-100-524-300](#) [09-07-2032](#) [10035388-802LF](#) [10115859-011LF](#) [10122859-009LF](#) [101269333204245CLF](#) [530555-1](#) [66925-516LF](#) [5145409-2](#) [73726-0005](#) [66308-1](#) [EBC05DRXN](#) [KSLX-62-BR](#) [CE100F26-7-C](#) [CE100F28-3-D](#) [CE100F28-4-D](#) [CE156F22-9-C](#) [CT100F24-3-D](#) [CT100F24-6-C](#) [MLSS100-12-C](#) [SCC100F-11-C](#) [SCC100F-20-C](#) [SCC100F-24-C](#) [SCC100F-25-C](#) [3-530656](#) [2512250177](#) [285-0112-12300](#) [346-068-556-300](#) [284-0492-11000](#) [287-0032-12301](#)