
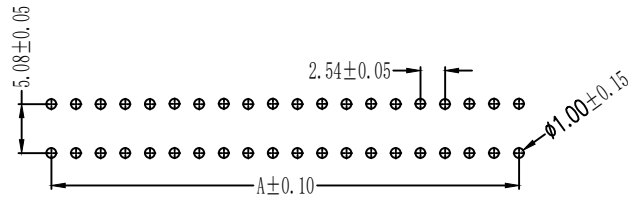


Recommended Card Layout



Recommended Card Layout

SPECIFICATION

Current Rating:3A

Dielectric Withstanding Voltage:1000V AC/Minute

Contact Resistance:20 Milliohms Max

Insulation Resistance:5000 Megaohms Min. At 500V DC

Operation Temperature:-55°C~+125°C

Insertion Force:0.4Kgf Max. Per Pair

Withdrawal Force:0.25Kgf Max. Per Pair

Insulator:PBT+G.F. (UL94V-0)

Contact:Brass or Phosphor Bronze

Gold Plated On Contact Area

Tin Plated On Solder Tails, Over Nickel

RoHS Compliant

Pin	A	B	C	D	Pin	A	B	C	D
4	2.54	7.92	11.37	9.62	64	78.74	84.12	87.57	85.82
6	5.08	10.46	13.91	12.16	66	81.28	86.66	90.11	88.36
8	7.62	13	16.45	14.7	68	83.82	89.2	92.65	90.9
10	10.16	15.54	18.99	17.24	70	86.36	91.74	95.19	93.44
12	12.7	18.08	21.53	19.78	72	88.9	94.28	97.73	95.98
14	15.24	20.62	24.07	22.32	74	91.44	96.82	100.27	98.52
16	17.78	23.16	26.61	24.86	76	93.98	99.36	102.81	101.06
18	20.32	25.7	29.15	27.4	78	96.52	101.9	105.35	103.6
20	22.86	28.24	31.69	29.94	80	99.06	104.44	107.89	106.14
22	25.4	30.78	34.23	32.48	82	101.6	106.98	110.43	108.68
24	27.94	33.32	36.77	35.02	84	104.14	109.52	112.97	111.22
26	30.48	35.86	39.31	37.56	86	106.68	112.06	115.51	113.76
28	33.02	38.4	41.85	40.1	88	109.22	114.6	118.05	116.3
30	35.56	40.94	44.39	42.64	90	111.76	117.14	120.59	118.84
32	38.1	43.48	46.93	45.18	92	114.3	119.68	123.13	121.38
34	40.64	46.02	49.47	47.72	94	116.84	122.22	125.67	123.92
36	43.18	48.56	52.01	50.26	96	119.38	124.76	128.21	126.46
38	45.72	51.1	54.55	52.8	98	121.92	127.3	130.75	129
40	48.26	53.64	57.09	55.34	100	124.46	129.84	133.29	131.54
42	50.8	56.18	59.63	57.88	102	127	132.38	135.83	134.08
44	53.34	58.72	62.17	60.42	104	129.54	134.92	138.37	136.62
46	55.88	61.26	64.71	62.96	106	132.08	137.46	140.91	139.16
48	58.42	63.8	67.25	65.5	108	134.62	140	143.45	141.7
50	60.96	66.34	69.79	68.04	110	137.16	142.54	145.99	144.24
52	63.5	68.88	72.33	70.58	112	139.7	145.08	148.53	146.78
54	66.04	71.42	74.87	73.12	114	142.24	147.62	151.07	149.32
56	68.58	73.96	77.41	75.66	116	144.78	150.16	153.61	151.86
58	71.12	76.5	79.95	78.2	118	147.32	152.7	156.15	154.4
60	73.66	79.04	82.49	80.74	120	149.86	155.24	158.69	156.94
62	76.2	81.58	85.03	83.28	128	160.02	165.4	168.85	167.1

Order Information

E D xxx B GF BK

E=2.54mm FEMALE EDGE SLOT

D=DIP STRAIGHT 180°

NO. OF PINS:04-128

B=Brass + PBT

P=Phosphor Bronze + PBT

BK=Black

GN=Green

BU=Blue

GF=1u" Glod Flash

03=3u" Glod

05=5u" Glod

10=10 u" Glod

15=15 u" Glod

A3=3u" All Glod



深圳市格林柏电子技术开发有限公司

<b>X. ± 0.30</b>	<b>APPD:</b>	<b>PART NO:</b>  EDxxxBGFBK		
<b>.X ± 0.20</b>	<b>CHKD:</b>			
<b>.XX ± 0.10</b>	<small>HZF</small>			
<b>.XXX ± 0.05</b>	<b>DR:</b>			
<b>X° ± 1°</b>				
<b>.X° ± 0.5°</b>				
	<b>UNITS:</b> mm	<b>SCALE:</b> 1:1	<b>DWG NO:</b>	<b>SHEET 4 OF 4</b>
				REV: A

REV	ECN NO	DESCRIPTION	DATE

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Card Edge Connectors](#) category:*

*Click to view products by [WingTAT](#) manufacturer:*

Other Similar products are found below :

[CR7E-30DB-3.96E\(72\)](#) [6565204-6](#) [1437274-4](#) [1-582587-1](#) [284-0102-12100](#) [286-0052-12101A](#) [306022901000000](#) [A6D22DS29C2](#) [1926088-2](#) [245-062-520-350](#) [287-0032-12101](#) [306-028-525-102](#) [307-072-526-202](#) [330-030-500-278](#) [345-060-559-303](#) [534671-1](#) [341-240-317](#) [345-044-500-300](#) [346-240-318](#) [C7D10DS29C1M133](#) [395-100-524-300](#) [09-07-2032](#) [10035388-802LF](#) [10115859-011LF](#) [10122859-009LF](#) [101269333204245CLF](#) [530555-1](#) [66925-516LF](#) [5145409-2](#) [73726-0005](#) [66308-1](#) [EBC05DRXN](#) [KSLX-62-BR](#) [CE100F26-7-C](#) [CE100F28-3-D](#) [CE100F28-4-D](#) [CE156F22-9-C](#) [CT100F24-3-D](#) [CT100F24-6-C](#) [MLSS100-12-C](#) [SCC100F-11-C](#) [SCC100F-20-C](#) [SCC100F-24-C](#) [SCC100F-25-C](#) [3-530656](#) [2512250177](#) [285-0112-12300](#) [346-068-556-300](#) [284-0492-11000](#) [287-0032-12301](#)