



DATASHEET -Preliminary-

Surface Acoustic Wave Filter

- **Application : LTE Band 8**
- **Model : SFX897WYF02**
- **Center Frequency : 897.5 / 942.5 [MHz]**




WISOL CO., LTD.

373-7, GAJANG-DONG, OSAN-SI
GYUNGGI-DO, KOREA, 447-210


<http://www.wisol.co.kr>

E-mail: sales@wisol.co.kr

1. OUTLINE DRAWING & RECOMMENDED PCB

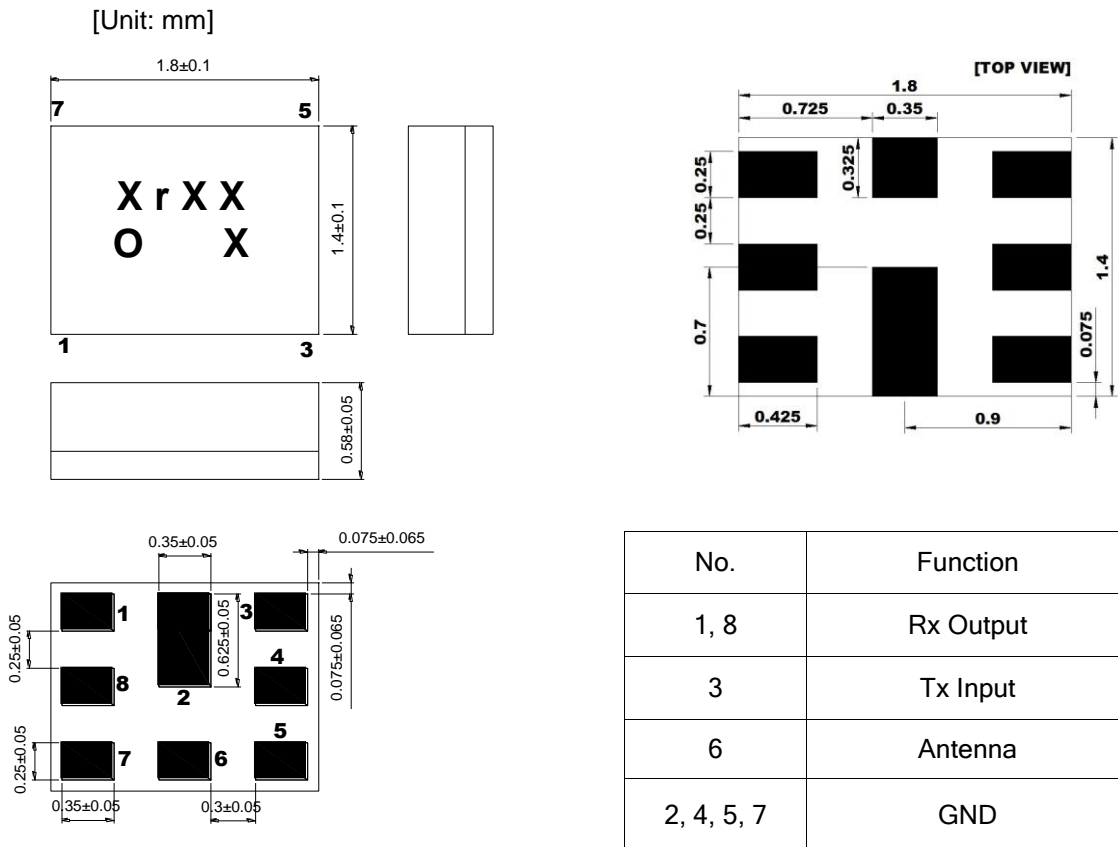

2. TEST FIXTURE

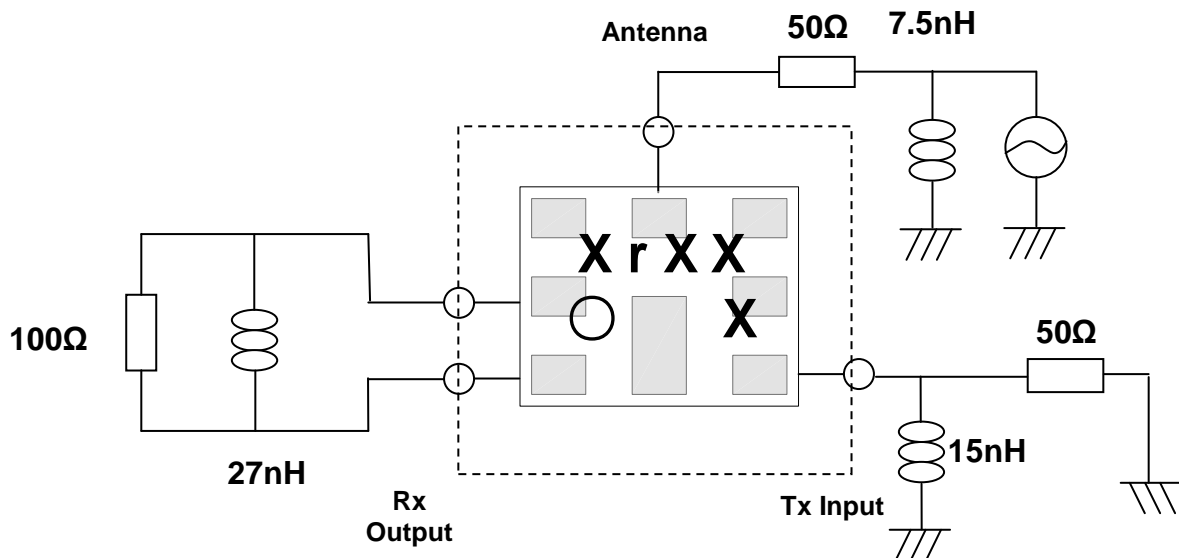

3. PERFORMANCE

3-1. MAXIMUM RATINGS

CHARACTERISTICS	RATINGS	UNITS
DC Permissive Voltage	5	V
Maximum Input Power	0.8	W
Operating Temperature Range	-20 ~ +85	°C
Storage Temperature Range	-40 ~ +85	°C

3-2. ELECTRICAL CHARACTERISTICS

3-2-1. TABLE


Ta = -20 ~ +85°C

Item	CONDITION [MHz]	UNIT	RATING		
			Min.	Typ.(25°C)	Max.
TX → ANTENNA					
Insertion Loss	880.24 ~ 914.76	dB	-	2.2	3.6
	882.4 ~ 912.6	dB	-	1.8	2.5
Inband Ripple	880.24 ~ 914.76	dB	-	1.2	2.8
	882.4 ~ 912.6	dB	-	0.8	1.7
VSWR	880 ~ 915	-	-	1.9	2.3
Absolute Attenuation	10 ~ 830	dB	23	27	-
	927.4 ~ 957.6	dB	44	54	-
	970~1005	dB	23	30	-
	1572 ~1579	dB	31	36	-
	2110~2170	dB	33	38	-
	2400~2500	dB	28	33	-
	2640~2745	dB	20	27	-
4400~4575		dB	5	13	-
Termination Impedance : INPUT / ANTENNA			50Ω // 15[nH] /50Ω // 7.5[nH]		
ANTENNA → RX					
Insertion Loss	925 ~ 960	dB	-	2.2	3.5
	927.4 ~ 957.6	dB	-	1.9	2.5
Inband Ripple	925 ~ 960	dB	-	0.8	2.3
	927.4 ~ 957.6	dB	-	0.5	1.3
VSWR	925 ~ 960	-	-	1.8	2.2
Absolute	10~880	dB	55	62	-


Attenuation	880 ~ 915	dB	47	59	-
	980~1785	dB	15	30	-
	1805~1920	dB	50	63	-
	1980~3000	dB	45	59	-
	3000~6000	dB	40	48	-
Termination Impedance : ANT / OUTPUT			50Ω // 7.5[nH] /100Ω // 27[nH]		
TX → RX					
Isolation between Rx and Tx	880 ~ 915	dB	55	60	-
	927.4 ~ 957.6	dB	50	56	-

3-2-2. GRAPH



3-2-2-1. Tx→Ant, Ant→Rx Transmission Characteristics

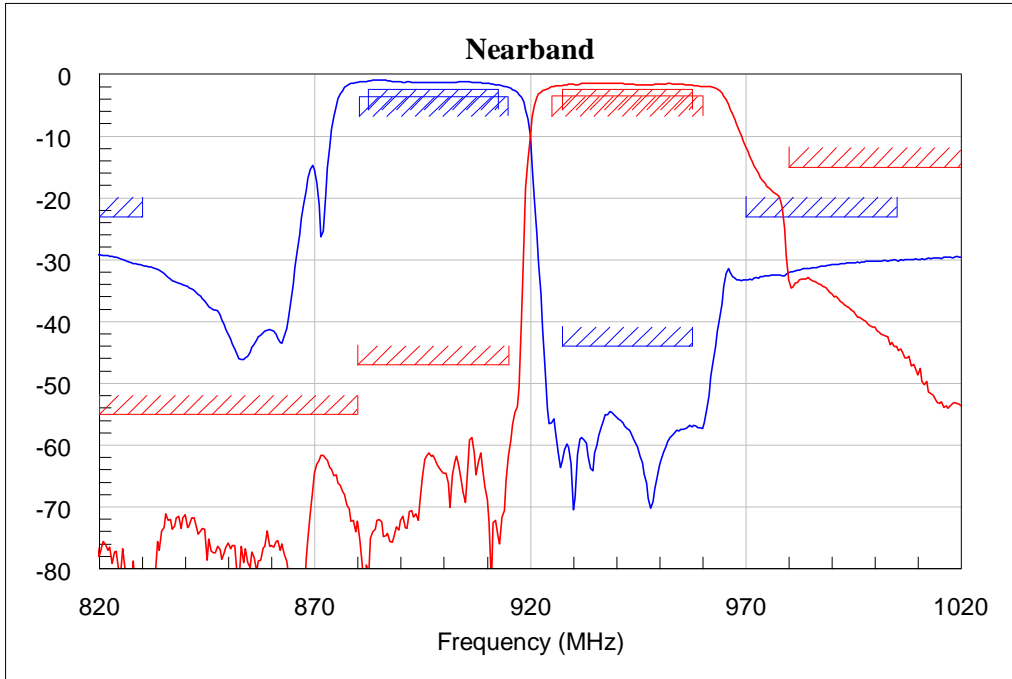


3-2-2-2. Tx→Rx Isolation Characteristics

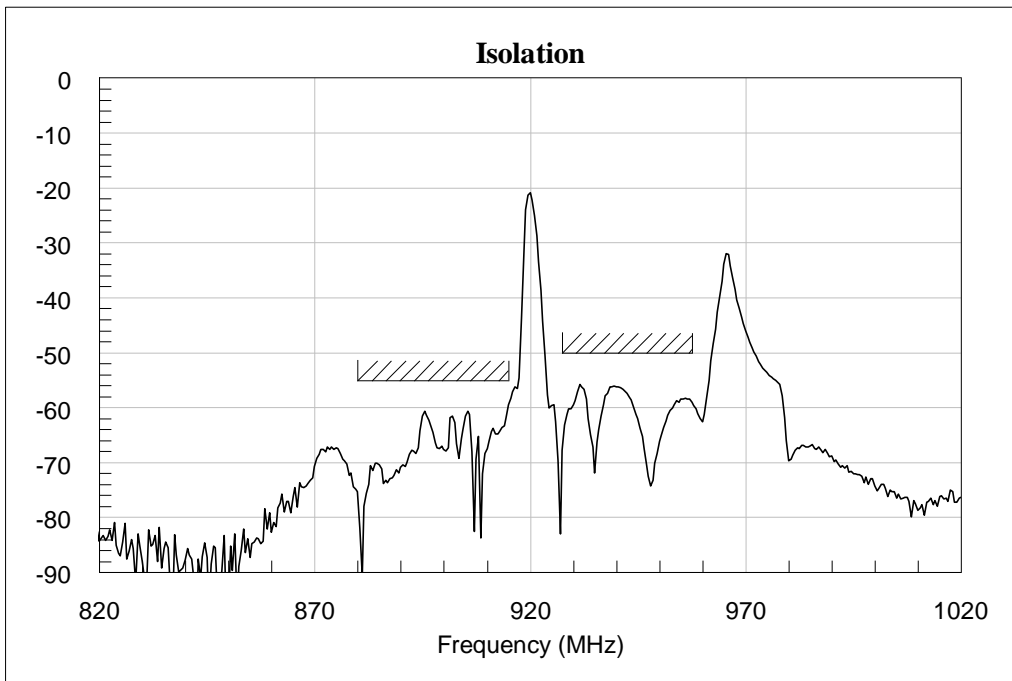

3-2-2-3. Wideband Tx→Ant, Ant→Rx Transmission Characteristics

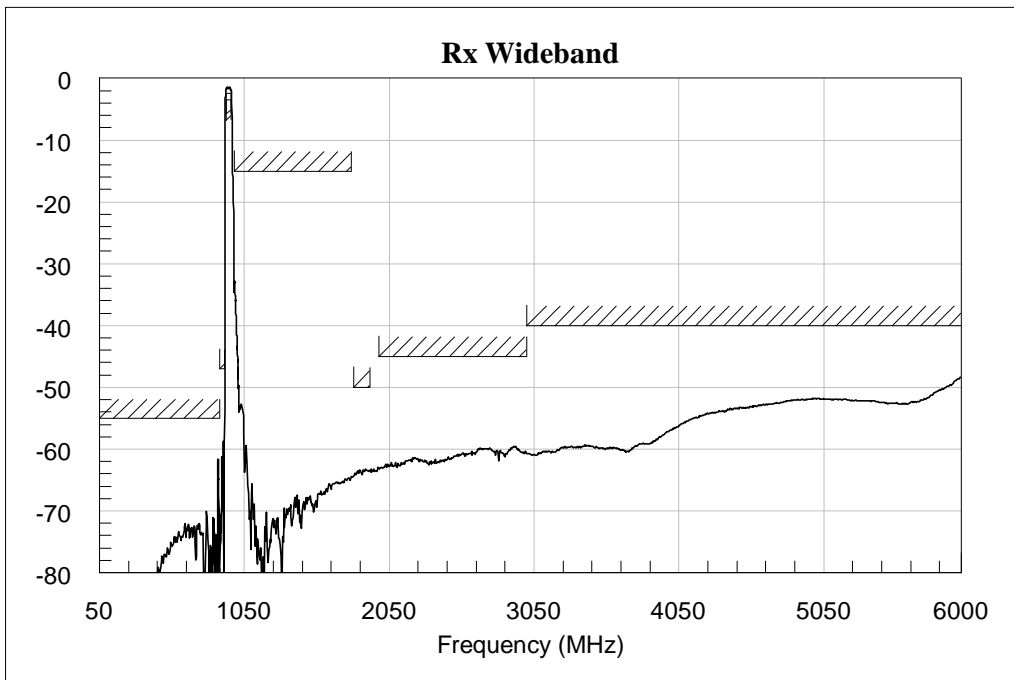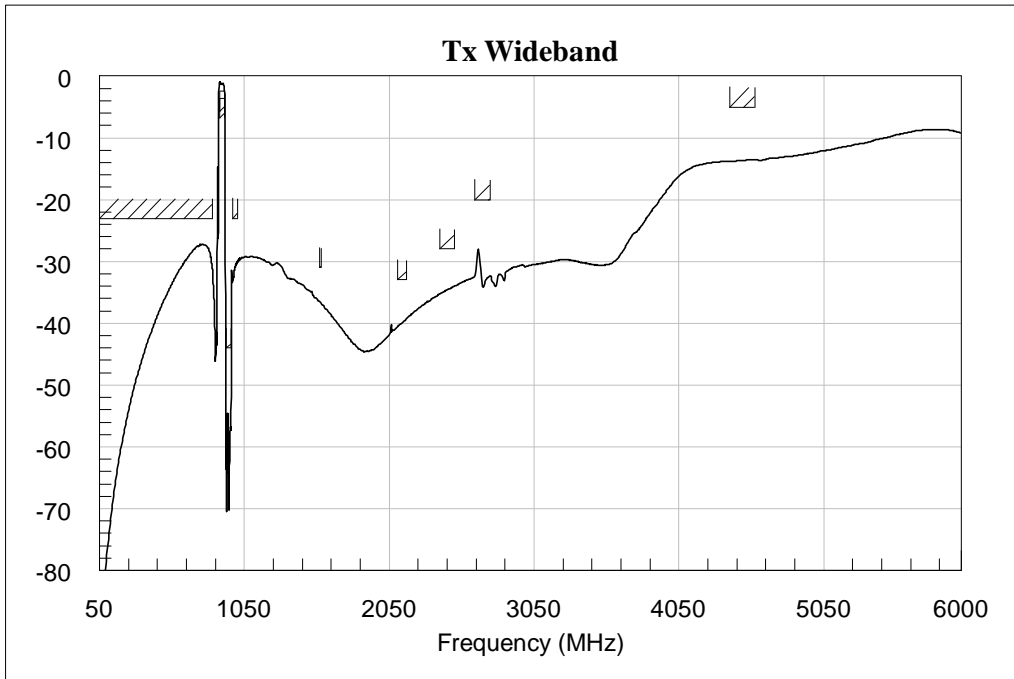




3-2-2-4. Wideband Tx→Rx Transmission Characteristics

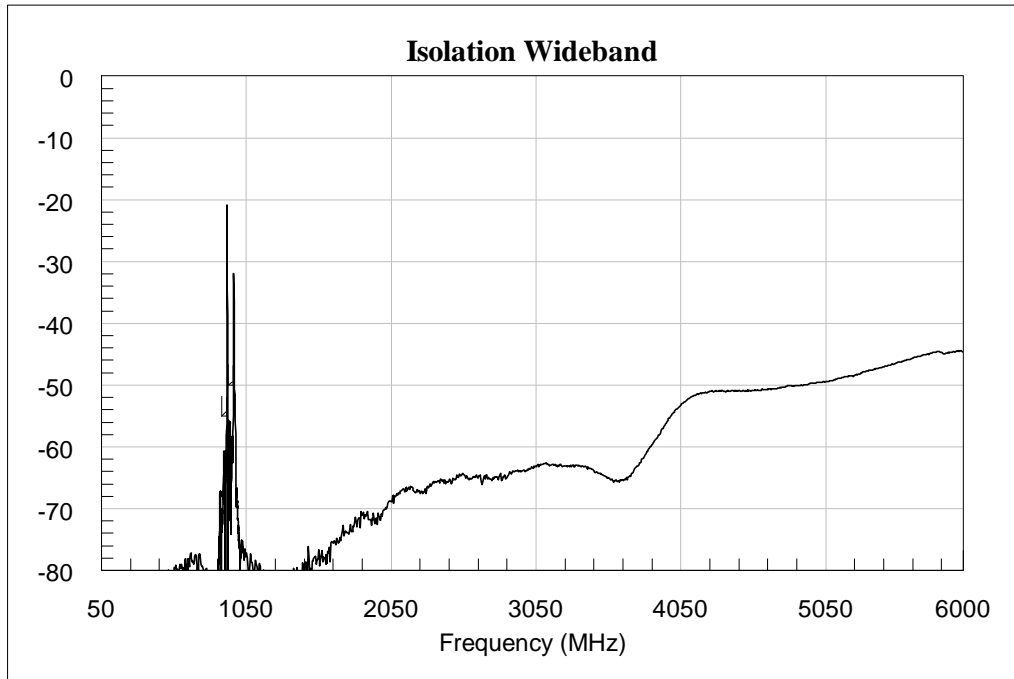

b

3-2-2-5. Smithchart

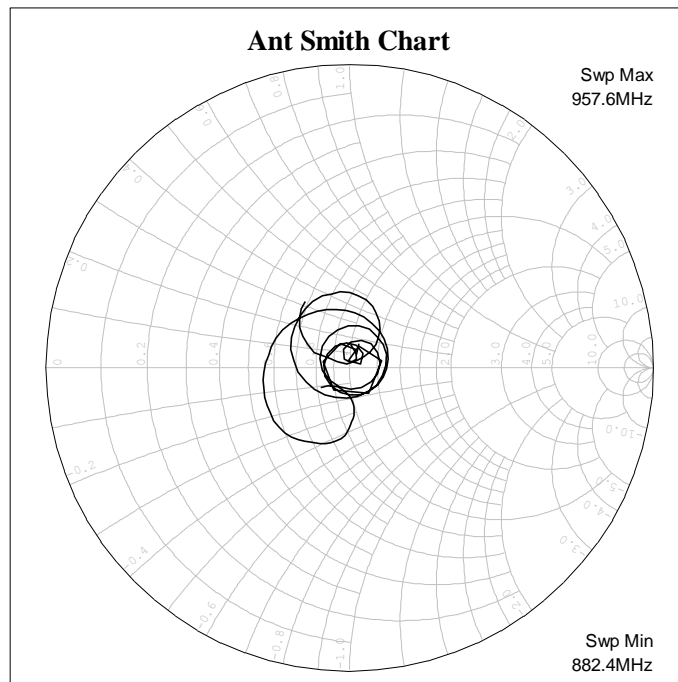


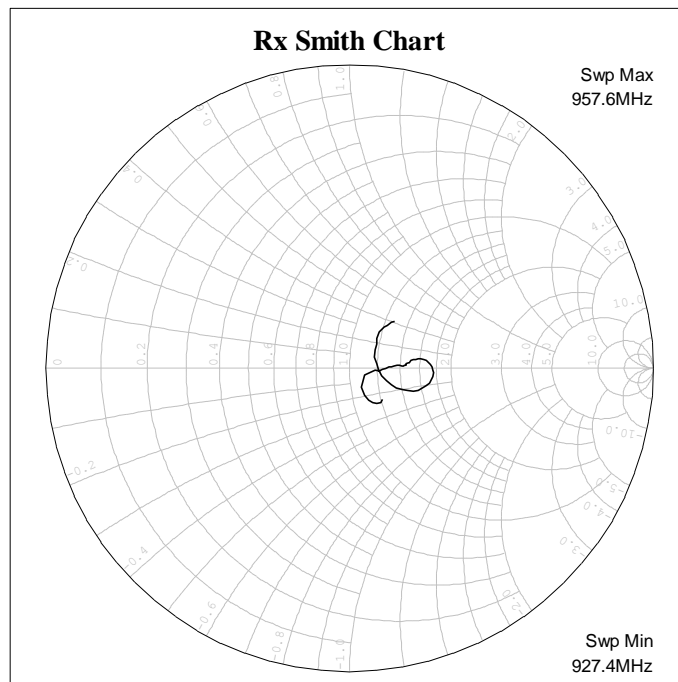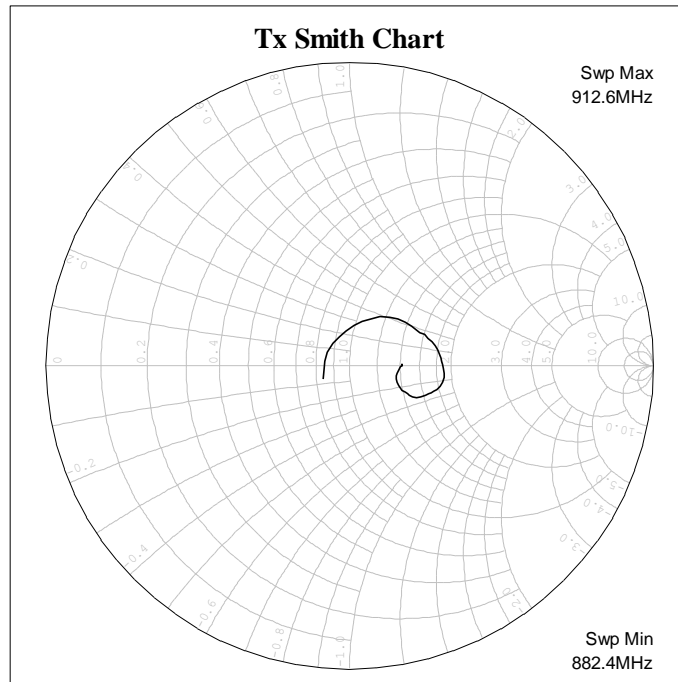

4. PACKING


4-1. DIMENSIONS

- Carrier Tape [Unit: mm]

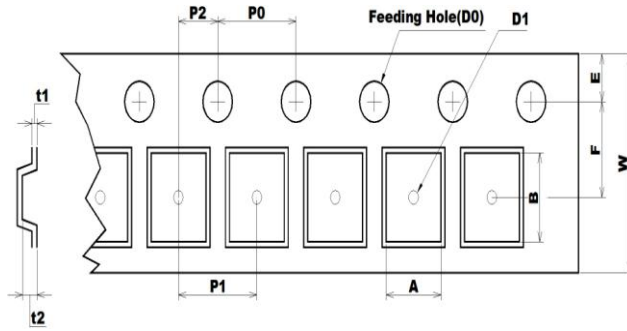

A	B	D0	D1
1.70 +0.10 -0.10	2.1 +0.10 -0.10	Ø1.55 +0.05 -0.05	Ø1.00 MIN
E	F	P0	P1
1.75 +0.10 -0.10	3.5 +0.05 -0.05	4 +0.10 -0.10	4 +0.10 -0.10
P2	t1	t2	W
2 +0.05 -0.05	0.25 +0.05 -0.05	0.70 +0.10 -0.10	8 +0.30 -0.30

- Reel [Unit: mm]

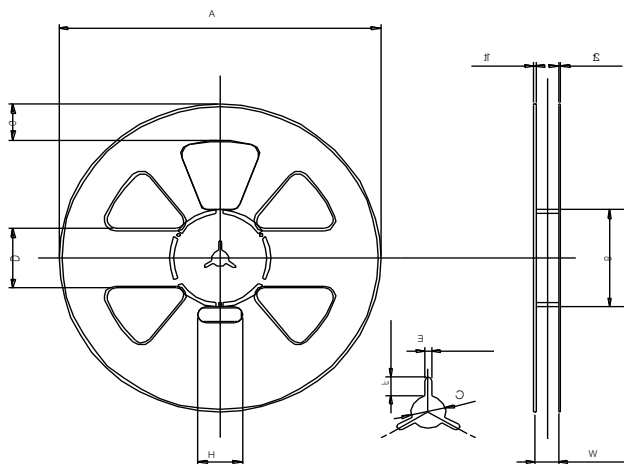

A	B	C	D
Ø258.0 +1.0 -0.5	Ø81.0 +1.0 -1.0	Ø13.0 +0.5 -0.5	50.0 +0.8 -0.8
E	F	G	H
2.2 +0.3 -0.3	7.0 +0.5 -0.5	30.0 +0.8 -0.8	35.0 +1.0 -1.0
t1	t2	W	
1.8 +0.5 -0.5	1.5 +0.5 -0.5	9.0 +1.0 -0.5	



- The product shall be packed properly not to be damaged during transportation and storage.

4-2. REELING QUANTITY

10 inch reel: 8,000 pcs/reel

4-3. TAPING STRUCTURE

The tape shall be wound around the reel in direction shown below.

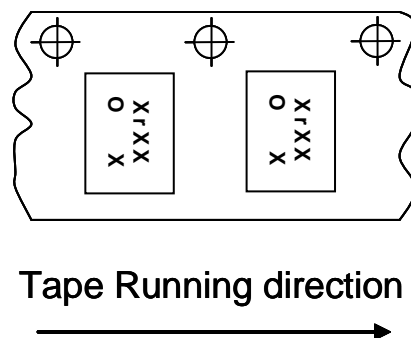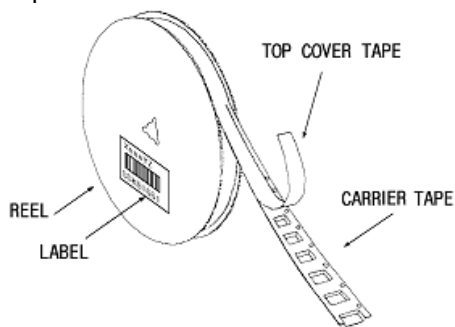

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [WISOL](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [HHS-109-PIN](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [DSS-313-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[AFS1575.42S4-T](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [JHS-115-PIN](#)
[DC0710J5005AHF](#) [DC2327J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#)
[SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [051157-0000](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#)
[B0922J7575AHF](#) [10017-3](#) [TP-103-PIN](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)