



Huizhou Wisva Optoelectronics Co.,Ltd

惠州市慧昊光电有限公司

Add: 5 Floor, Builidng 6, science and Technology Park, Longhai three road, Huiyang District, Huizhou China

地址: 惠州市惠阳区龙海三路中海科技园6栋5楼

Tel/Tel: 0752-5288039

Web: www.wisvalighting.com

Product Specification

产品规格书

Item No.:

HH-SRGB60F010WXX-5050

产品型号:

Series: RGB Series

产品系列: RGB 系列

| Confirmation/制作 | Approval/审核 | Audit/确认 | Date/日期 | Version/版本 |
|-----------------|-------------|----------|---------|------------|
| Eng. Harry D | 何俊远 | 林延安 | 10月15日 | 1.0 |

Features(特征)

Using 5050 SMD RGB as light source, stable, high efficiency and high brightness.

使用SMD 5050 RGB 灯珠作为光源, 稳定, 光效高, 亮度高.

Low voltage 12V or 24Vdc input, PWM, 0/1-10V and DALI dimming ways supported.

低压12或24Vdc输入, 支持PWM, 0/1-10V和DALI等调光方式.

RGB color changing, support with most of RGB controllers in the markets.

RGB颜色变化, 支持市面上的大部分控制器.

CE, Rohs and UL listed.


CE, Rohs 和UL认证.

Picture(图片)




Dimensions(尺寸)

12Vdc

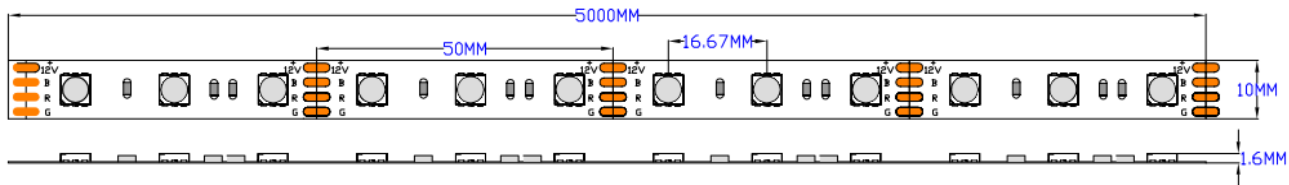

24Vdc

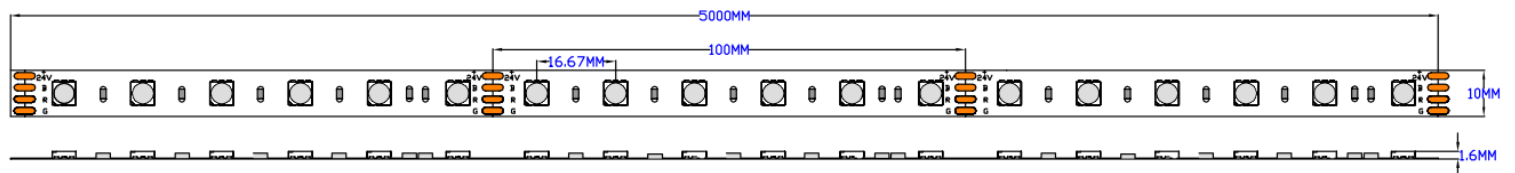

Specifications(参数)

| | | |
|------------------------|-----------------------|--------|
| Item NO. 产品型号 | HH-SRGB60F010WXX-5050 | |
| LED/Meter LED/米 | 60 | |
| Input Voltage 输入电压 | DC 12V | DC 24V |
| Cutting Length 裁剪长度 | 50mm | 100mm |
| PCB 板子 | 10mm, 2oz | |

| | | | | |
|-----------------------------|----------------------------|-----------|----------|-------------|
| Power 功率 | 4.8W/m | 4.8W/m | 4.8W/m | 14.4W/m |
| Colors 颜色 | Red | Green | Blue | Mixed White |
| Brightness 亮度 | 112.8Lm/m | 292.8Lm/m | 52.8Lm/m | 475Lm/m |
| Efficiency 光效 | 23.5Lm/W | 61Lm/W | 11Lm/W | 33Lm/W |
| Length 长度 | 5,000 mm | | | |
| Size 尺寸 | Wdith: 10mm, Height: 1.6mm | | | |
| Lifespan 工作时长 | 50,000 H | | | |
| Working Temperature 工作温度 | -20°C - 50°C | | | |
| Storage Temperature 储存温度 | -20°C - 65°C | | | |
| Warranty 质保 | 3 years | | | |

* The above measurements of watts, brightness and efficiency allowance tolerance $\pm 10\%$.


* 以上功率和光效允许误差范围是 $\pm 10\%$.

* The above measurements are based on IP20 and Ra80.


以上测量均基于IP20和Ra80.

Temperature Curve(温升曲线)

12Vdc

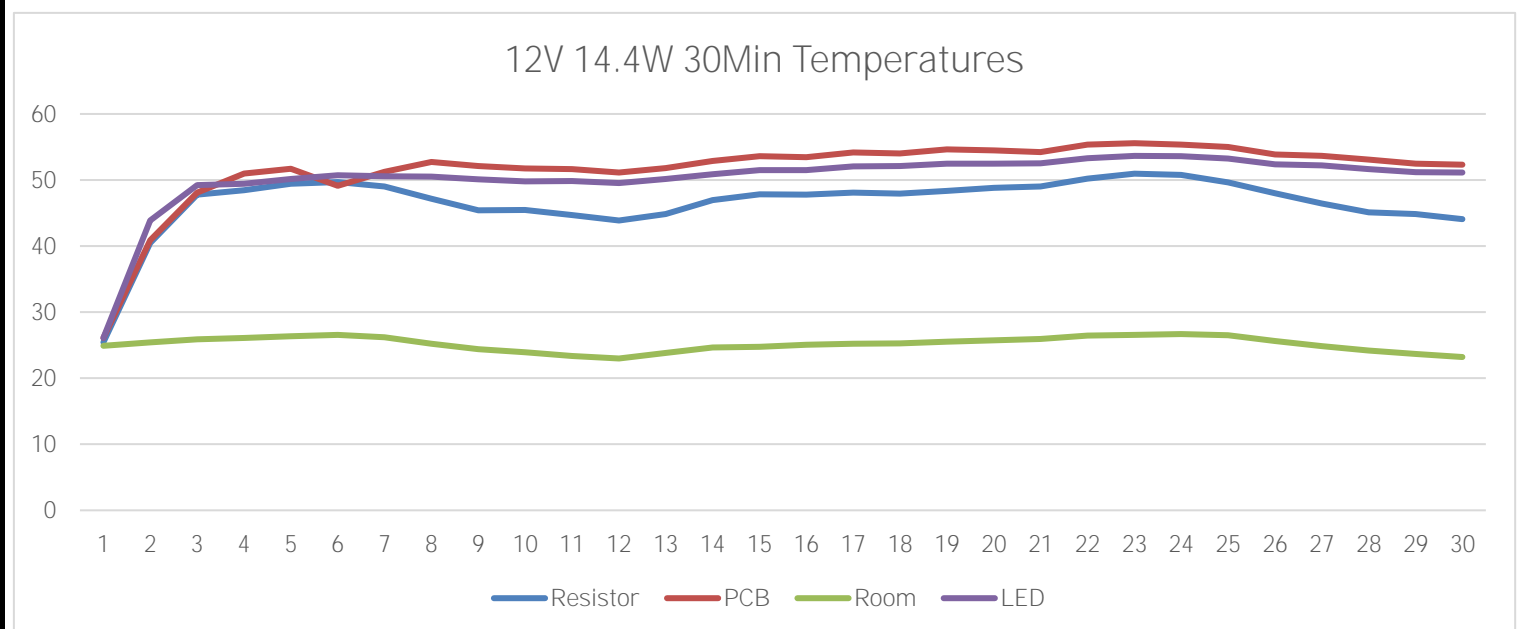

24Vdc

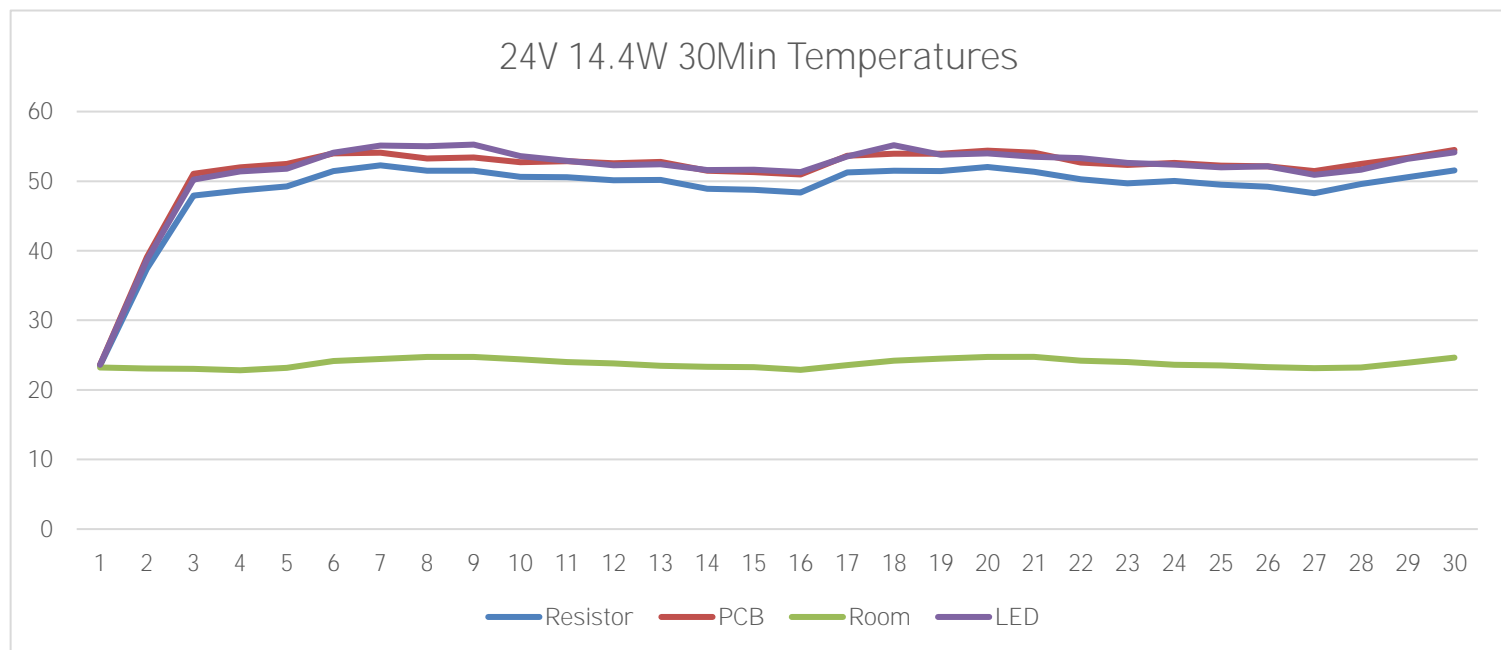

Brightness Consistency(亮度一致性)

The following charts shows the voltage, lumen and brightness drop on each meter.

以下表格展示每一米上的是电压，流明和亮度差

12Vdc

Chart1, Based on 5m Running/表格1, 基于5米连接长度.

| Length | 1M | 2M | 3M | 4M | 5M |
|---------|--------|---------|---------|---------|---------|
| Voltage | 10.53 | 10.03 | 9.68 | 9.50 | 9.45 |
| Lumen | 350.18 | 315.14 | 291.34 | 278.58 | 275.33 |
| Drop | 0.00% | -10.01% | -16.80% | -20.45% | -21.37% |

From above charts, for better brightness consistency, the recommend length is 5m for powering on one side.

基于以上数据, 为了更好的亮度一致性, 推荐单端供电时的安装长度为5米

24Vdc


Chart1, Based on 5m Running/表格1, 基于5米连接长度.




| Length | 1M | 2M | 3M | 4M | 5M |
|---------|--------|--------|--------|--------|--------|
| Voltage | 23.26 | 22.81 | 22.50 | 22.33 | 22.29 |
| Lumen | 451.06 | 434.91 | 423.67 | 417.45 | 415.90 |
| Drop | 0.00% | -3.58% | -6.07% | -7.45% | -7.79% |

From above charts, for better brightness consistency, the recommend length is 5m for powering on one side.


基于以上数据, 为了更好的亮度一致性, 推荐单端供电时的安装长度为5米

Waterproof Ways(防水方式)

| Waterproof Ways | IP Rating | Details |
|---|-----------|--|
| 防水方式 | 防水等级 | 细节说明 |
|  | IP54 | PU or Silicone glue on the surface of the led strips. 表面滴PU或者硅胶 |

| | | |
|---|------|---|
|  | IP65 | Heat Shrink tube or Silicone tube for led strips. 热缩套管或者硅胶套管防水 |
|  | IP67 | Hollow integrated silicone glue. 挤出型硅胶防水, 中空 |
|  | IP68 | Solid Integrated Silicone glue, or silicone glue with silicone tube 挤出型一体化硅胶防水, 实心; 或者灌胶(硅胶套管里加硅胶) |

Installation Ways(安装方式)

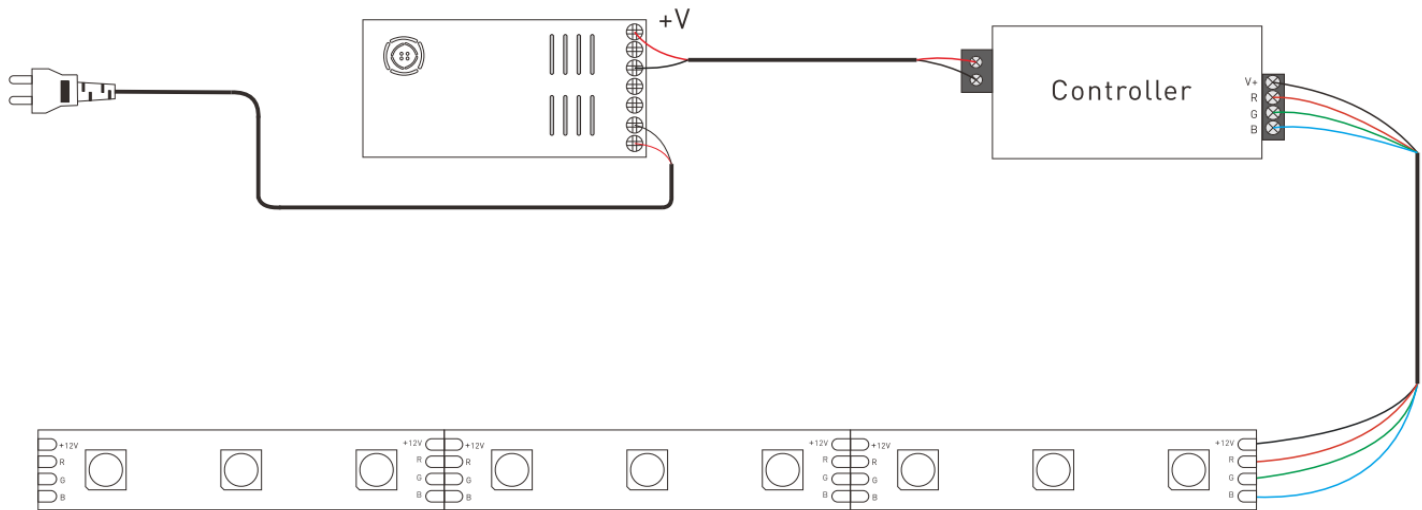

* When powering on one side, the recommend installation length is 5m.
if require running longer, please connect them in parallel.

单端供电时, 推荐安装长度是5米, 如果需要连接更长, 推荐使用并联安装.

* Please match the markings '+' and '-' in the PCB during wiring.

请根据PCB板子上的 '+' 和 '-' 来连接

* Better use aluminum profiles to help heat dissipation and reach better linear lighting effects.

推荐使用铝材去辅助散热, 达到更好的线条效果.

* Please power the LED strip with correct input voltage, do not use any AC power source to power the LED strip.

请使用正确的输入电压去连接灯带, 不要连接到任何交流电源.

Applications(应用)

* Used in linear lights as lighting source; used for indoor decorations.

作为线条灯条光源, 用作室内室外的装饰.



Package(包装)

①) 5 meters per roll.

5米一卷.

②) Each roll packed with anti-static bags, and label on it.


每一卷放入静电袋中, 静电袋表面贴标签.

③) 25 rolls into a small box.

25卷放入一个小箱子中.

④-⑤) 2 small boxes into a large carton 520*320*300mm.

2个小箱放入一个大箱520*320*300mm.

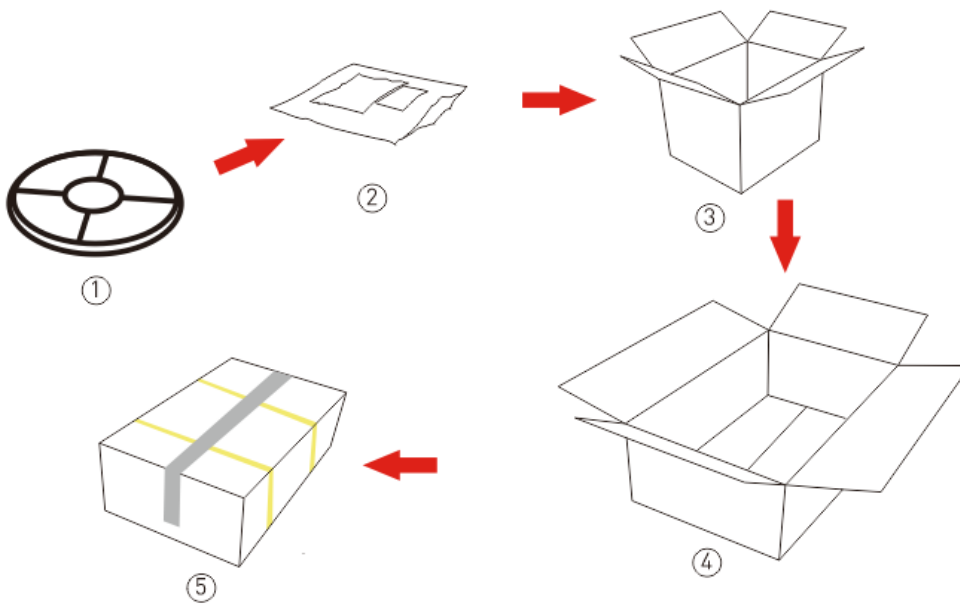

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [WISVA OPTOELECTRONICS](#) manufacturer:

Other Similar products are found below :

[LFBLL-SW823-24V-8S125-20](#) [LFBHL-SW927-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [HH-SRGB840F010W24-COB](#) [N004120BB1LZ \(6000K\)](#) [N004120BC1LZ \(3000K\)](#)
[N008120BB1LZ \(BLUE\)](#) [N008120BC1LZ \(4000K\)](#) [S008144CA4SA1/C1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#) [COB-480-CW-24-10W](#)
[HQS-14.4W-60LED-RGB-WP-12V-5M](#) [N013060CA3SA1](#) [HQS-12W-60LED-W-WP-24V-5M](#) [UQS-COB-12W-NW-24V-5M](#) [HH-](#)
[SNW480F208W24-COB-R](#) [HQS-12W-60LED-NW-WP-12V-5M](#) [S012120BC1HZ \(WARM WHITE\)](#) [HQS-6W-60LED-WW-WP-24V-5M](#)
[S020240BC1DC0/C3](#) [S012060CB4SA1/C2](#) [HQS-12W-60LED-WW-WP-24V-5M](#) [HH-SW480F008W24-COB-R](#) [UQS-COB-8W-WW-12V-](#)
[5M](#) [HH-SWW480F008W24-COB-R](#) [COB-480-WW-24-10W](#) [HQS-6W-60LED-NW-WP-12V-5M](#) [S012060CC4DC0/C3](#) [S012048CB4PZ](#)
[\(RGB+W:3000K\)](#) [HQS-9.6W-120LED-NW-WP-12V-5M](#) [S012480ZB1SF \(WARM WHITE IP20\)](#) [HQS-6W-60LED-WW-12V-5M](#)
[S012120BC1HZ \(COLD WHITE\)](#) [HQS-6W-60LED-W-WP-12V-5M](#) [HQS-6W-60LED-W-12V-5M](#) [HQS-9.6W-120LED-NW-24V-5M](#) [HQS-](#)
[9.6W-120LED-NW-12V-5M](#) [UQS-COB-8W-NW-24V-5M](#) [HQS-12W-60LED-WW-12V-5M](#) [S012480ZB1SF \(COLD WHITE IP20\)](#) [HH-](#)
[SRGB60F310W12-5050 WHITE PCB IP65A](#) [S010120BC3SM/C1](#) [UQS-COB-12W-W-24V-5M](#) [HH-SRGB60F010W12-5050 WHITE PCB](#)
[IP20](#) [HQS-6W-60LED-NW-12V-5M](#) [HH-SW60F008W12-3528 CW WHITE PCB IP20](#) [HQS-6W-60LED-NW-24V-5M](#) [S004060BB3PZ/C2](#)