



Huizhou Wisva Optoelectronics Co.,Ltd

惠州市慧昊光电有限公司

Add: 5F, Bld 6, Zhonghai Science Park, Dayawan West District, Huizhou China 516083

地址: 惠州市大亚湾西区中海科技(惠州工业园)6号厂房5楼

Tel/Tel: 0752-5288019

Web: www.wisvald.com/www.wisvald.net

# Product Specification

产品规格书

Item No.:

HH-SX480F008W24-COB-R

产品型号:

Series: R2R COB Series

产品系列: 卷对卷COB系列

Confirmation/制作	Approval/审核	Audit/确认	Date/日期	Version/版本
许韩鹏	林延安		2022/6/6	1.0

## Features(特征)


Reel-to-reel PCB, no solder joints for whole reel, solder-free at every half meter, which avoid problems like false soldering, or inaccurate length because of lap solder that happens on regular LED strip lights.  
卷对卷PCB, 整卷无焊点, 无需在每0.5米处焊接, 避免了常规灯带可能发生的虚焊, 以及安装长度不准确等问题。

Chips-on-board design, dot free even without any profiles  
COB设计方案, 无光斑, 无暗区。


Excellent lighting with SDCM in 5-step, high efficiency that's up to 100lm/W @CRI90.  
光色一致性高, 色容差5步以内, 光效高达100lm/W, 高显指(Ra90+)。

Double layer 2oz PCB, for better flexibility, heat dissipation and voltage drop.  
2oz双面板, 兼顾产品压降、散热及柔性。

## Picture(图片)

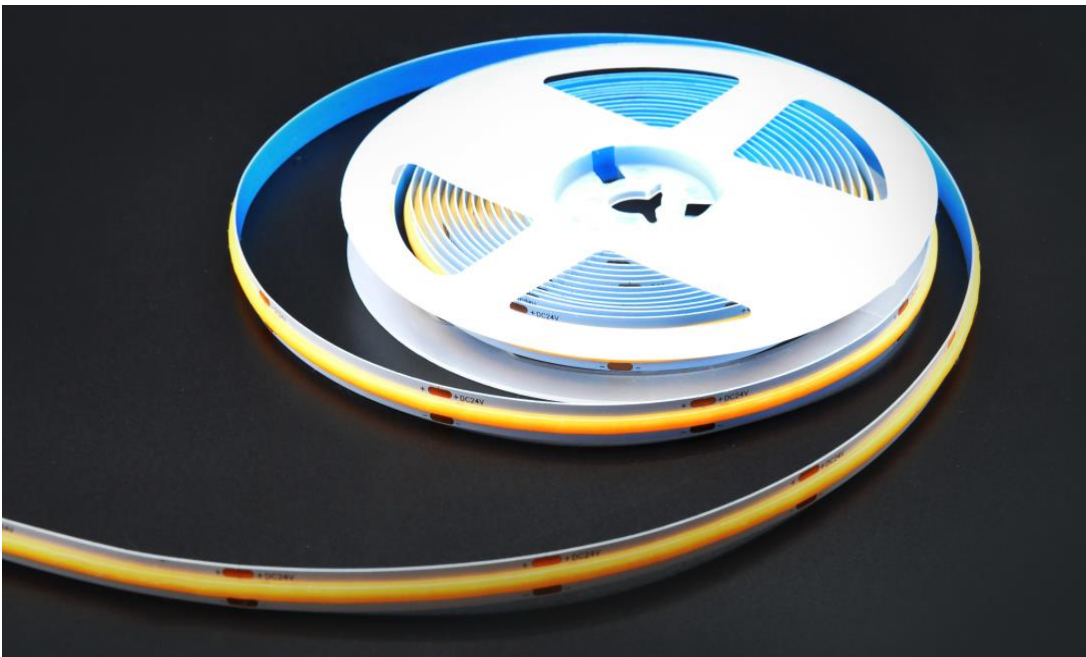

## Dimensions(尺寸)

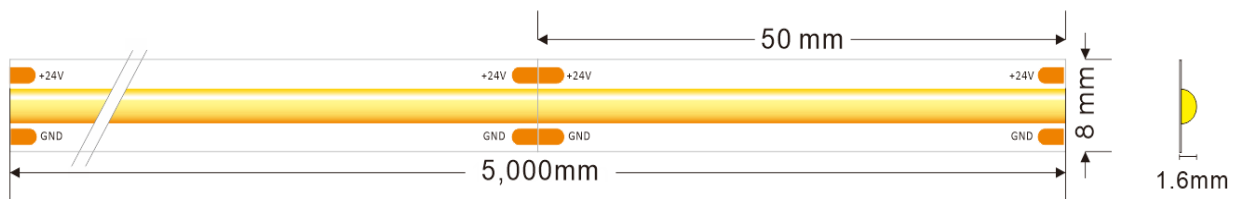

## Specifications(参数)

Item NO. 产品型号	HH-SX480F008W24-COB-R
Item Code 产品代号	RCOB480208
Input Voltage 输入电压	24V

Ra	Ra 90+		
显色指数	Ra 90+		
Power	10W/M		
功率	10W/M		
CCT	3000K	4000K	6500K
色温	3000K	4000K	6500K
Brightness	850LM	950LM	1000LM
亮度	850LM	950LM	1000LM
Efficiency	85LM/W	95LM/W	100LM/W
光效	85LM/W	95LM/W	100LM/W
Copper	2oz, double layer		
含铜量	2oz, 双面板		
Length/Reel	5 M		
长度/卷	5 M		
Size	8mm x 1.6mm		
尺寸	8mm x 1.6mm		
Cutting Length	50mm		
裁剪长度	50mm		
Working Temperature	-20° C - 40° C		
工作温度	-20° C - 40° C		
Storage Temperature	-20° C - 45° C		
储存温度	-20° C - 45° C		
Lifespan	35,000 Hours (小时)		
工作时长	35,000 Hours (小时)		
Warranty	2 Years (年)		
质保	2 Years (年)		





\* The above measurements of watts, brightness and efficiency allowance tolerance  $\pm 10\%$ .

\* 以上功率和光效允许误差范围是 $\pm 10\%$ 。


\* The above measurements are based on IP20.

以上测量均基于IP20。

### Waterproof Ways(防水方式)

Waterproof Ways	IP Rating	Details
防水方式	防水等级	细节说明
	IP54	PU or Silicone glue on the surface of the led strips. 表面滴PU或者硅胶
	IP65	Injected with Silicone Tube 硅胶套管防水
	IP67	IP67 Extrusion, Integrated Silicone 挤出型硅胶防水, 中空
	IP68	Solid Integrated Silicone glue, or silicone glue with silicone tube 挤出型一体化硅胶防水, 实心; 或者灌胶(硅胶套管里加硅胶)

## Installation Ways(安装方式)

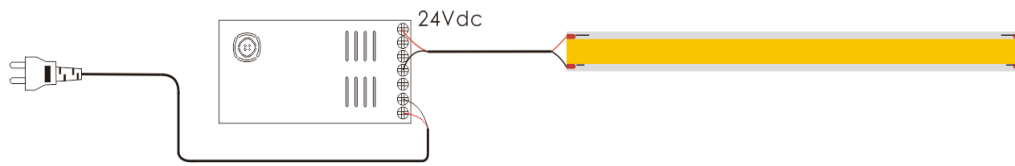

\* The max running length is 5 meters, for over 5 meters please connect in parallel.

推荐最大连接长度为5m, 超过5m, 请并联.

\* Make sure of the total watts of COB Strip lights is less than 80% of the power supply's max output.

确保灯带的总的功率小于电源输出功率的80%.

\* Match the polarities according to the mark ('+' and '-') in the PCB while connecting.

连接时, 请对准PCB板上标注的极性.

## Applications(应用)

\* Residential lighting, commercial lighting.

住宅照明, 商业照明.



## Package(包装)

①) 5 meters per roll.

5m一卷.

②) Each roll packed with anti-static bags, and label on it.

每一卷放入静电袋中, 静电袋表面贴标签.

③) 25 rolls into a inner box(30cm x 24cm x 26cm).


25卷放入一个内箱中(30cm x 24cm x 26cm).

④-⑤) 2 inner boxes into a large carton (50cm\*30cm\*29cm).

2个小箱放入一个大箱.

⑥) Delivery.

发货.

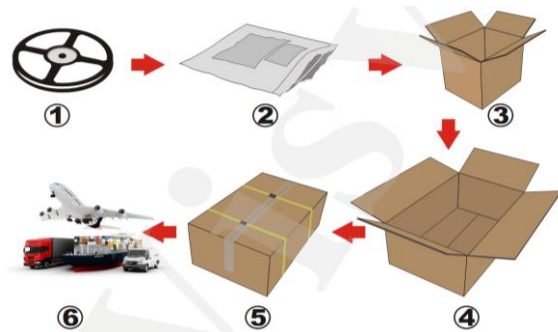

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Bars and Strips](#) category:*

*Click to view products by [WISVA OPTOELECTRONICS](#) manufacturer:*

Other Similar products are found below :

[LFBLL-SW823-24V-8S125-20](#) [LFBHL-SW927-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)  
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [HH-SRGB840F010W24-COB](#) [N004120BB1LZ \(6000K\)](#) [N004120BC1LZ \(3000K\)](#)  
[N008120BB1LZ \(BLUE\)](#) [N008120BC1LZ \(4000K\)](#) [S008144CA4SA1/C1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#) [COB-480-CW-24-10W](#)  
[HQS-14.4W-60LED-RGB-WP-12V-5M](#) [N013060CA3SA1](#) [HQS-12W-60LED-W-WP-24V-5M](#) [UQS-COB-12W-NW-24V-5M](#) [HH-](#)  
[SNW480F208W24-COB-R](#) [HQS-12W-60LED-NW-WP-12V-5M](#) [S012120BC1HZ \(WARM WHITE\)](#) [HQS-6W-60LED-WW-WP-24V-5M](#)  
[S020240BC1DC0/C3](#) [S012060CB4SA1/C2](#) [HQS-12W-60LED-WW-WP-24V-5M](#) [HH-SW480F008W24-COB-R](#) [UQS-COB-8W-WW-12V-](#)  
[5M](#) [HH-SWW480F008W24-COB-R](#) [COB-480-WW-24-10W](#) [HQS-6W-60LED-NW-WP-12V-5M](#) [S012060CC4DC0/C3](#) [S012048CB4PZ](#)  
[\(RGB+W:3000K\)](#) [HQS-9.6W-120LED-NW-WP-12V-5M](#) [S012480ZB1SF \(WARM WHITE IP20\)](#) [HQS-6W-60LED-WW-12V-5M](#)  
[S012120BC1HZ \(COLD WHITE\)](#) [HQS-6W-60LED-W-WP-12V-5M](#) [HQS-6W-60LED-W-12V-5M](#) [HQS-9.6W-120LED-NW-24V-5M](#) [HQS-](#)  
[9.6W-120LED-NW-12V-5M](#) [UQS-COB-8W-NW-24V-5M](#) [HQS-12W-60LED-WW-12V-5M](#) [S012480ZB1SF \(COLD WHITE IP20\)](#) [HH-](#)  
[SRGB60F310W12-5050 WHITE PCB IP65A](#) [S010120BC3SM/C1](#) [UQS-COB-12W-W-24V-5M](#) [HH-SRGB60F010W12-5050 WHITE PCB](#)  
[IP20](#) [HQS-6W-60LED-NW-12V-5M](#) [HH-SW60F008W12-3528 CW WHITE PCB IP20](#) [HQS-6W-60LED-NW-24V-5M](#) [S004060BB3PZ/C2](#)