




## FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance









BAW56 Marking: A1

BAV70 Marking: A4

BAV99 Marking: A7

## Maximum Ratings @T<sub>A</sub>=25℃


Parameter	Symbol	Limits	Unit
Reverse voltage	V <sub>R</sub>	70	V
Forward Current	l <sub>F</sub>	200	mA
Peak Forward Surge Current	I <sub>FM(surge)</sub>	500	mA
Power Dissipation	PD	225	mW
Thermal Resistance Junction to Ambient Air	$R_{ extsf{ heta}JA}$	556	°C/W
Junction temperature	TJ	150	°C
Storage temperature range	T <sub>STG</sub>	-55-150	°C


## Electrical Characteristics @T<sub>A</sub>=25℃

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V <sub>R</sub>	70			V	I <sub>R</sub> =100μA
Forward voltage	V <sub>F1</sub>			0.715	V	I <sub>F</sub> =1mA
	V <sub>F2</sub>			0.855	V	I <sub>F</sub> =10mA
	V <sub>F3</sub>			1	V	l <sub>F</sub> =50mA
	V <sub>F4</sub>			1.25	V	I <sub>F</sub> =150mA
Reverse current	I <sub>R</sub>			2.5	μA	V <sub>R</sub> =70V
Capacitance between terminals	CT			1.5	pF	V <sub>R</sub> =0,f=1MHz
Reverse recovery time	trr			6	ns	$I_F = I_R = 10 \text{mA},$
						$Irr= 0.1 \text{ x } I_{R}, R_{L} = 100\Omega$





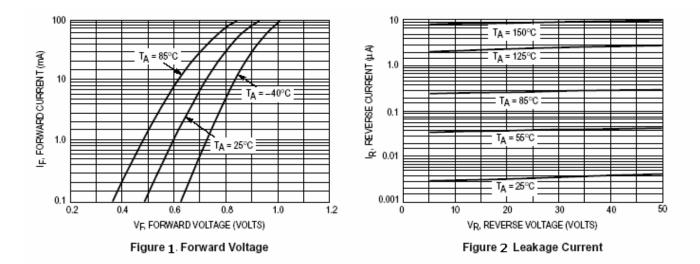

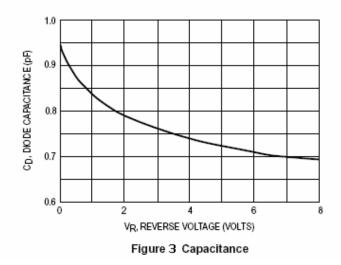

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by WPMtek manufacturer:

Other Similar products are found below :

MCL4151-TR3 MMBD3004S-13-F RD0306T-H BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 JAN1N4153-1 JAN1N4454-1 JAN1N4454UR-1 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 1N4454-TR BAV199E6433HTMA1 BAV70HDW-7 BAS28-7 JANTX1N6640 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G 1SS388-TP RGP30D-E3/73 VS-8EWF02S-M3