


FEATURES

- Low current (max. 100 mA)
- Low voltage (max. 65 V).

APPLICATIONS

- General purpose switching and amplification.



1.Base 2.Emitter 3.Collector
SOT-23 Plastic Package

DESCRIPTION

NPN transistor in a SOT23 plastic package.

PNP complements: BC856 /857/858/859/860.

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Parameter	Symbol	Value	Units	
Collector Base Voltage	BC846	V _{CBO}	80	V
	BC847, BC850	V _{CBO}	50	V
	BC848, BC849	V _{CBO}	30	V
Collector Emitter Voltage	BC846	V _{CEO}	65	V
	BC847, BC850	V _{CEO}	45	V
	BC848, BC849	V _{CEO}	30	V
Emitter Base Voltage	BC846, BC847	V _{EBO}	6	V
	BC848, BC849, BC850	V _{EBO}	5	V
Collector Current	I _C	100	mA	
Peak Collector Current	I _{CM}	200	mA	
Power Dissipation	P _{tot}	300	mW	
Thermal Resistance from Junction to Ambient Air	R _{θJA}	417	°C/W	
Junction Temperature	T _J	150	°C	
Storage Temperature Range	T _S	- 65 to + 150	°C	







ELECTRICAL CHARACTERISTICS (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Units
Collector-base breakdown voltage at I _C = 10 μA, I _E = 0	BC846 BC847/850 BC848/849 V _{(BR)CBO}	80 50 30			
Collector-emitter breakdown voltage at I _C = 10 mA, I _B = 0	BC846 BC847/850 BC848/849 V _{(BR)CEO}	65 45 30			
Emitter-base breakdown voltage at I _E = 1 μA, I _C = 0	BC846/847 BC848-850 V _{(BR)EBO}	6 5			
DC Current Gain at V _{CE} = 5 V, I _C = 2 mA	A B C h _{FE} h _{FE} h _{FE}	110 200 420	- - -	220 450 800	- - -
Collector Emitter Saturation Voltage at I _C = 10 mA, I _B = 0.5 mA at I _C = 100 mA, I _B = 5 mA	V _{CEsat} V _{CEsat}	- -	- -	250 600	mV mV
Base-emitter saturation voltage at I _C = 10 mA, I _B = 0.5 mA at I _C = 100 mA, I _B = 5 mA	V _{BEsat} V _{BEsat}	- -	700 900	850 1100	mV mV
Base Emitter On Voltage at I _C = 2 mA, V _{CE} = 5 V at I _C = 10 mA, V _{CE} = 5 V	V _{BE(on)} V _{BE(on)}	580 -	- -	700 770	mV mV
Collector Cutoff Current at V _{CB} = 30 V	I _{CBO}	-	-	15	nA
Current Gain Bandwidth Product at V _{CE} = 5 V, I _C = 10 mA, f = 100 MHz	f _T	-	300	-	MHz
Output Capacitance at V _{CB} = 10 V, f = 1 MHz	C _{ob}	-	-	6	pF
Input Capacitance at V _{EB} = 0.5 V, f = 1 MHz	C _{ib}	-	9	-	pF
Noise Figure at I _C = 200 μA, V _{CE} = 5 V R _G = 2 KΩ, f = 1 KHz at I _C = 200 μA, V _{CE} = 5 V, R _G = 2 KΩ, f = 30 ~15 KHz	BC846, BC847, BC848 BC849, BC850 BC849 BC850 NF NF NF NF	- - - -	- - - -	10 4 4 3	dB dB dB dB

MARKING CODE

TYPE	846A	846B	846C	847A	847B	847C	848A	848B	848C	849A	849B	849C	850A	850B	850C
MARK	1A	1B	1C	1E	1F	1G	1J	1K	1L	2A	2B	2C	2E	2F	2G



Typical Characteristics

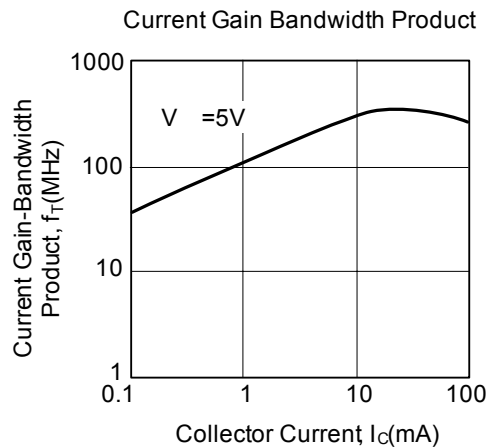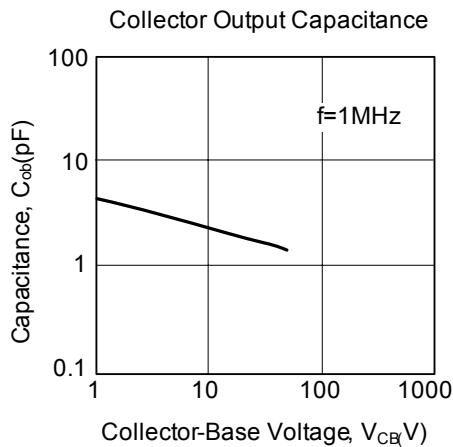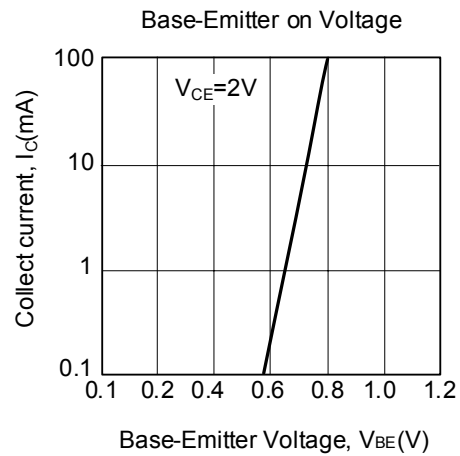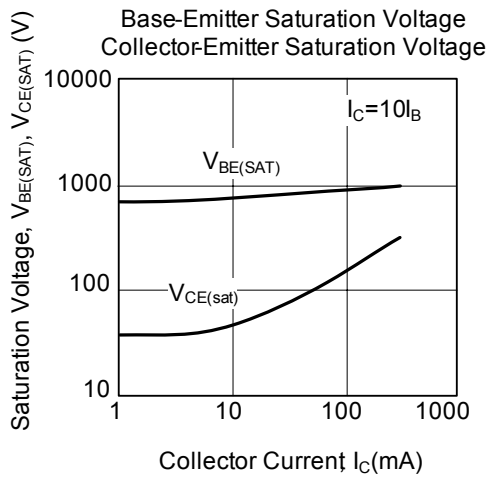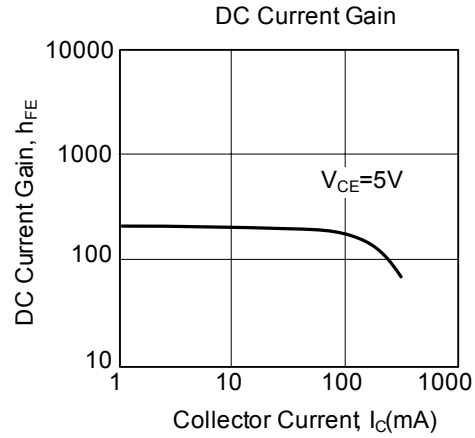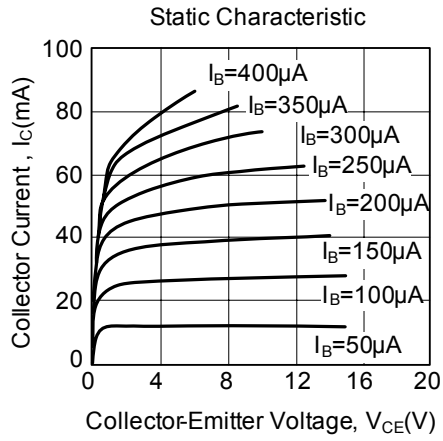

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

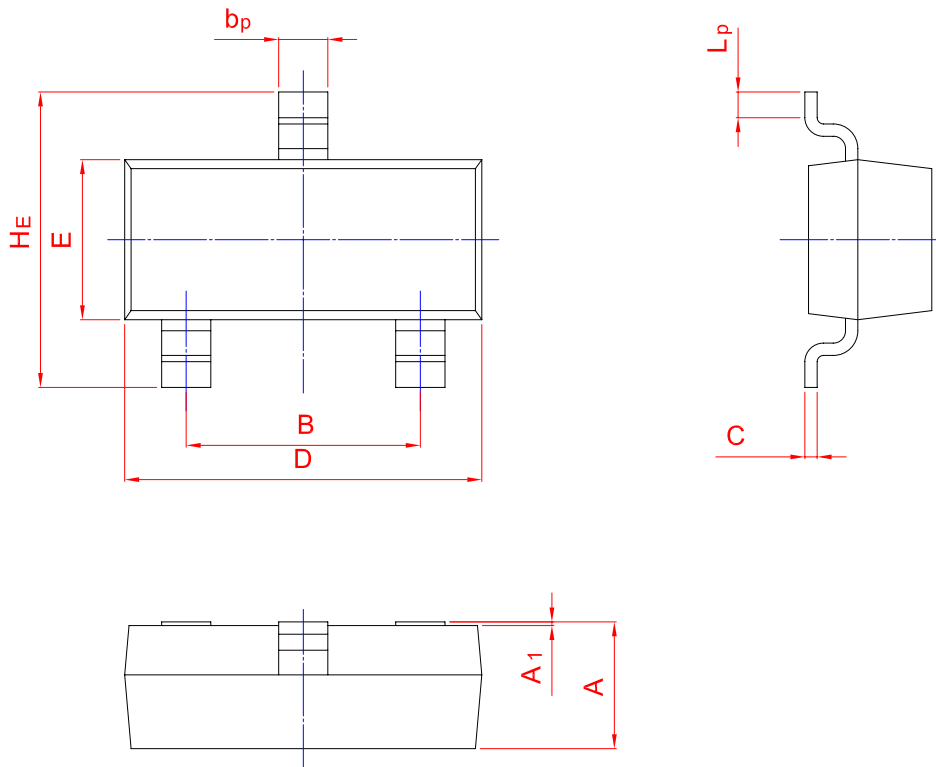

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40	2.04	0.50	0.19	3.10	1.65	3.00	0.100	0.50
	0.95	1.78	0.35	0.08	2.70	1.20	2.20	0.013	0.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [WPMtek manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N4403](#) [2N6728](#)
[2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-](#)
[TL-E](#) [MCH4021-TL-E](#) [Jantx2N5416](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[TTA1452B,S4X\(S](#) [2N3879](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANTX2N3735](#) [JANSR2N2222AUB](#)
[CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#)
[MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#)