

## Features

- ◆ Bi-directional crowbar transient voltage protection
- ◆ High surge capability
- ◆ High off-state impedance
- ◆ Low leakage current
- ◆ Low on-state voltage
- ◆ Short-circuit failure mode
- ◆ Ultra Low Capacitance



DO-214AC(SMA)

## Main Application

Sanyan's thyristor surge protector devices are designed to help protect sensitive telecommunication equipment from the hazards caused by lightning ,power contact,and power induction. These devices enable equipment to comply with various regulatory requirements including GR 1089,ITU K.20,K.21and K.45,IEC 60950 and TIA-968-A(formerly known as FCC Part 68).

## Typical application including:

- Central office switching equipment. Analog and digital linecards(xDSL,T1/E1,ISDN.....)
- Customer Premises Equipment (CPE) such as phones, fax machines, modems, POS terminals, PBX systems and caller ID adjunct boxes.
- Primary protection modules including Main Distribution Frames(MDF),building entrance equipment and station protection modules.
- Access network equipment such as remote terminals,line repeaters,multiplexers,cross-connects,WAN equipment,Network Interface Devices(NID).
- Data lines and security systems.
- CATV line amplifiers and power inserters.
- Sprinkler systems.


## Electrcal Parameters (Tamb=25°C)

| Part Number | V <sub>DRM</sub> | I <sub>DRM</sub> | V <sub>BO</sub> | I <sub>BO</sub> | V <sub>T</sub> | I <sub>T</sub> | C <sub>o</sub> | I <sub>H</sub> |
|-------------|------------------|------------------|-----------------|-----------------|----------------|----------------|----------------|----------------|
|             | Min.             | Max.             | Max.            | Max.            | Max.           | Max.           | Typ.           | Min.           |
|             | V                | uA               | V               | mA              | V              | A              | pF             | mA             |
| WP61065A    | 6                | 3                | 15              | 800             | 4              | 2.2            | 25             | 25             |
|             |                  |                  |                 |                 |                |                |                |                |
|             |                  |                  |                 |                 |                |                |                |                |




**Electrical Characteristics Curves**


**Figure1 V-I Characteristics**

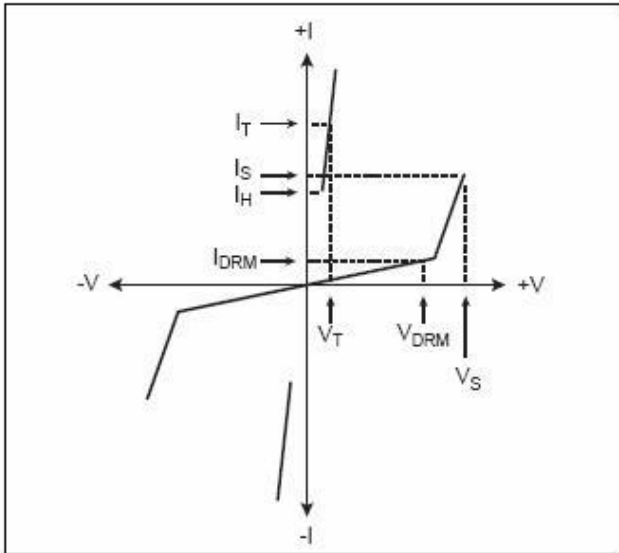


**Figure2  $t_r \times t_d$  Pulse Wave-form**

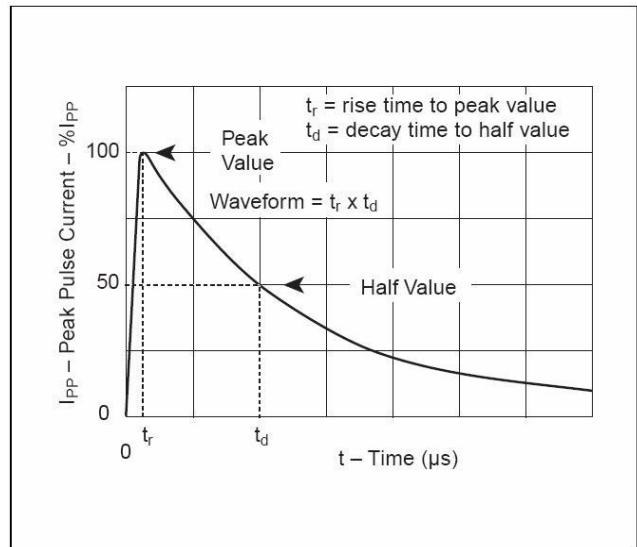


**Figure 3 Normalized  $V_S$  Change versus Junction Temperature**

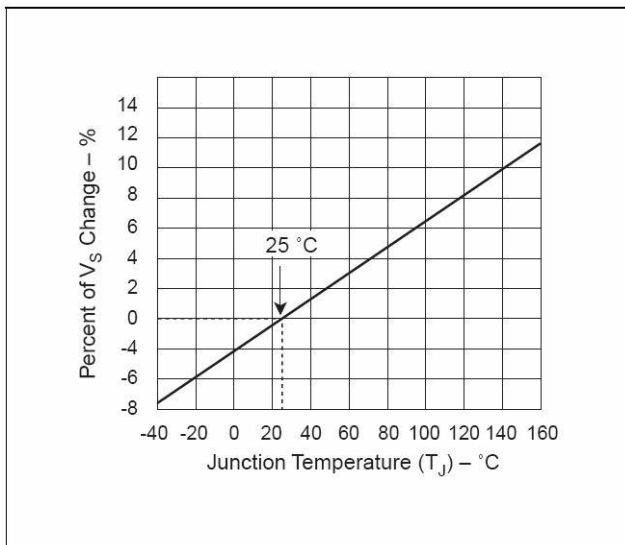


**Figure 4 Normalized DC Holding Current**

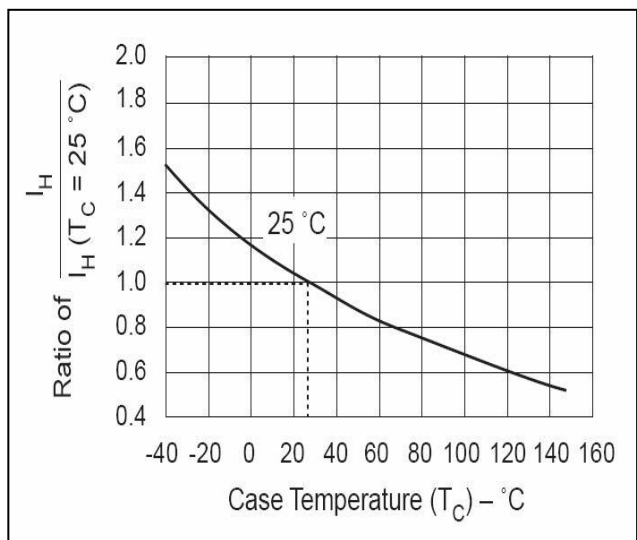

**Thermal Considerations**

| Package   | DO-214AC/SMA | Symbol          | Parameter                              | Value       | Unit |
|---|--------------|-----------------|--|-------------|------|
|  |              | $T_J$           | Operating Junction Temperature         | -40 to +150 | °C   |
|   |              | $T_S$           | Storage Temperature Range              | -40 to +150 | °C   |
|   |              | $R_{\theta JA}$ | Junction to Ambient on printed circuit | 90          | °C/W |

### Solder Reflow Recommendations

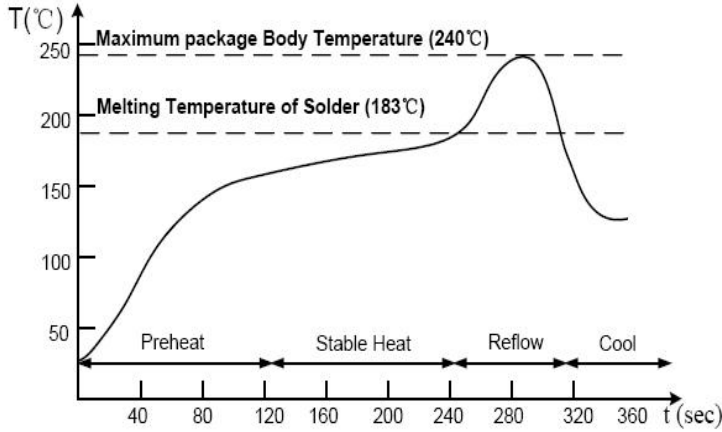


- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.


**Notes:** If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

### Product Dimensions

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | MIN    | MAX   | MIN         | MAX   |
| A         | 0.098  | 0.114 | 2.50        | 2.90  |
| B         | 0.188  | 0.208 | 4.80        | 5.28  |
| C         | 0.055  | 0.062 | 1.40        | 1.60  |
| D         | 0.157  | 0.181 | 4.00        | 4.60  |
| E         | 0.030  | 0.060 | 0.76        | 1.52  |
| F         | 0.078  | 0.096 | 2.00        | 2.44  |
| H         | 0.080  | 0.104 | 2.051       | 2.643 |

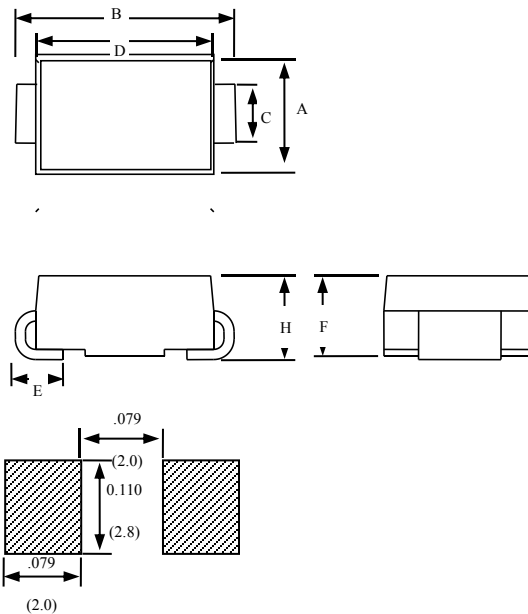

### Summary of Packing Options

| Package Type   | Description                | Packing Quantity | Industry Standard |
|--|----------------------------|------------------|-------------------|
| DO-214AC(SMA)<br> | Embossed Carrier Reel Pack | 5000PCS          | EIA-481-D         |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [WPMtek](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)