


Description

This device has been especially designed to protect 1 low voltage or signal line, as well as classical RS-485 interface, against transient over-voltages. ESD-voltages are clamped by 2 TVS diodes. Surges are suppressed by 2 thyristors, their breakdown voltage close to 25V, then their leakage current as low as 1uA. This devices are not subject to ageing and provide a fail safe mode in short circuit for a better protection. WPM are used to help equipment to meet various standards such as IEC950 / CSA C22.2 and FCC part68.

Features

- Integrated the two TVS diodes and two thyristor
- Accurate voltage of protection
- Low switching voltages: V_{BR}
- Low leakage current: $I_R = 2 \mu A$ max
- High Peak pulse current
- Solid-state silicon technology
- Meets MSL 1 Requirements
- ROHS compliant

Dimensions & Symbol (Unit: mm Max)

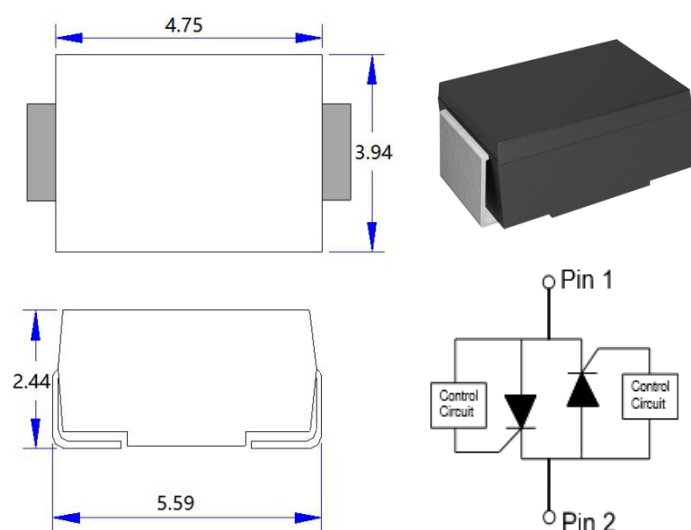


Mechanical Characteristics

- Package: SMB/DO-214AA
- Case Material: "Green" Molding Compound.
- Standard Packaging: 12mm tape (EIA STD RS-481)
- Weight: 0.10g
- Terminal Connections: See Diagram Below
- Marking Information: See Below

Applications

- RS-485 interface
- Telecommunications infrastructure
- PBX's and other switches
- FCC Part 68 Customer Premise Equipment
- Set-top box ,CATV lines
- Ammeter

Marking Information



Details marking code reference customer approval list

Ordering Information

Out line	Reel (pcs)	Reel diameters (mm)
Taping	3K	330

Absolute Maximum ratings ($T_A=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)


Parameter	Symbol	Value	Unit
Storage temperature range	T_{stg}	-40 to +150	$^{\circ}\text{C}$
Operating junction temperature range	T_j	-40 to +150	$^{\circ}\text{C}$
Repetitive peak pulse current	I_{PP}	100	A

Electrical Characteristics ($T_A=25^{\circ}\text{C}$)

Part Number	V_{RM}	I_{RM}	V_{BO}	I_{BO}	V_{T}	I_{T}	C_{O}	I_{H}
	Min.	Max.	Max.		Max.		Max.	Typ.
	V	μA	V	mA	V	A	pF	mA
WP61300B	25	5	40	800	4	2.2	75	50

Electrical Parameters & V-I Curve


Symbol	Parameter
V_{DRM}	Peak off-state voltage
I_{DRM}	Off-state current
V_{S}	Switching voltage
I_{S}	Switching current
V_{T}	On-state voltage
I_{T}	On-state current
I_{H}	Holding current
C_{O}	Off-state capacitance

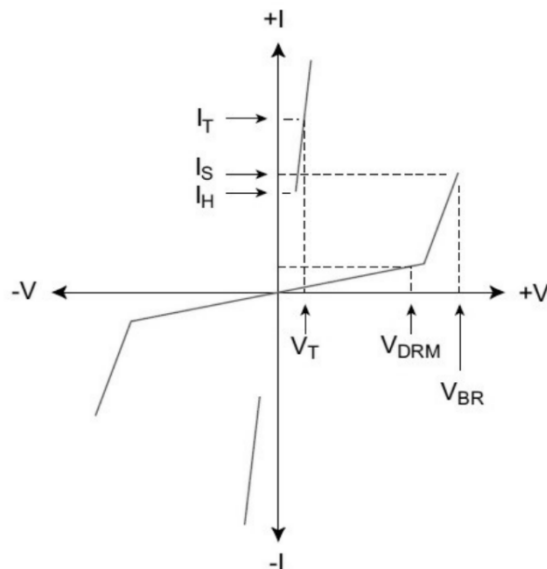


Surge Ratings

Series	I_{PP} (A) min			
	2×10 μs	8×20 μs	5×320 μs	10×1000 μs
B	250	250	100	80


Electrical Characteristics Curves

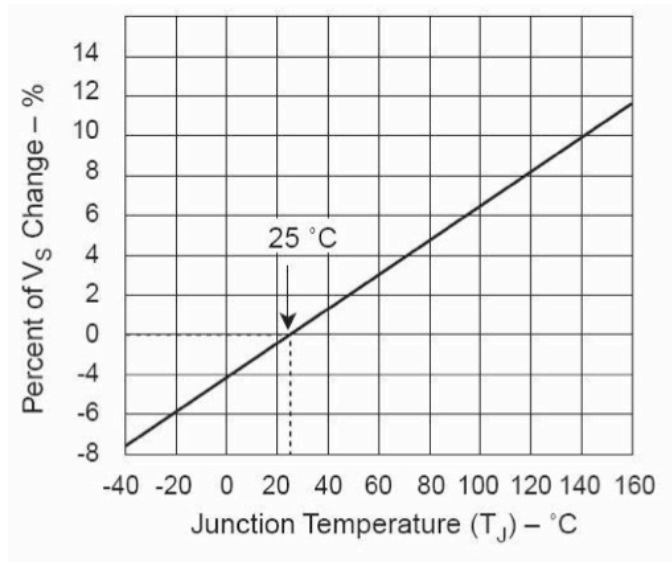

Normalized V_S Change – Junction Temperature

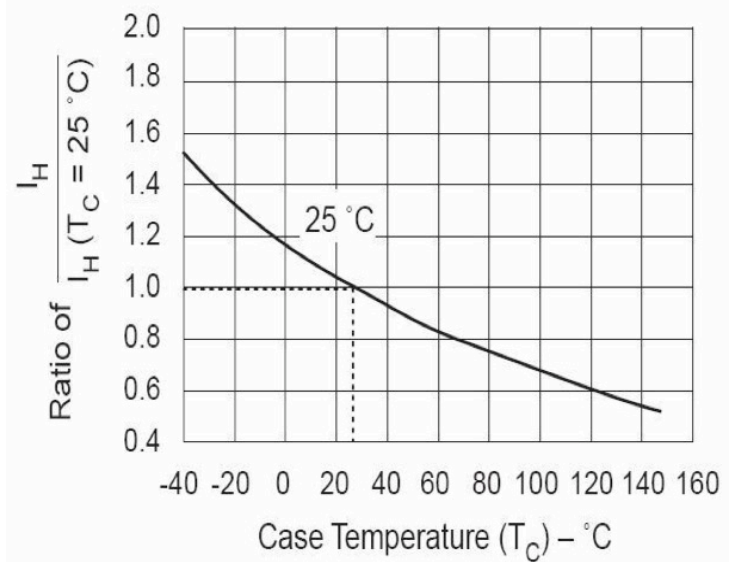


Normalized DC Holding Current

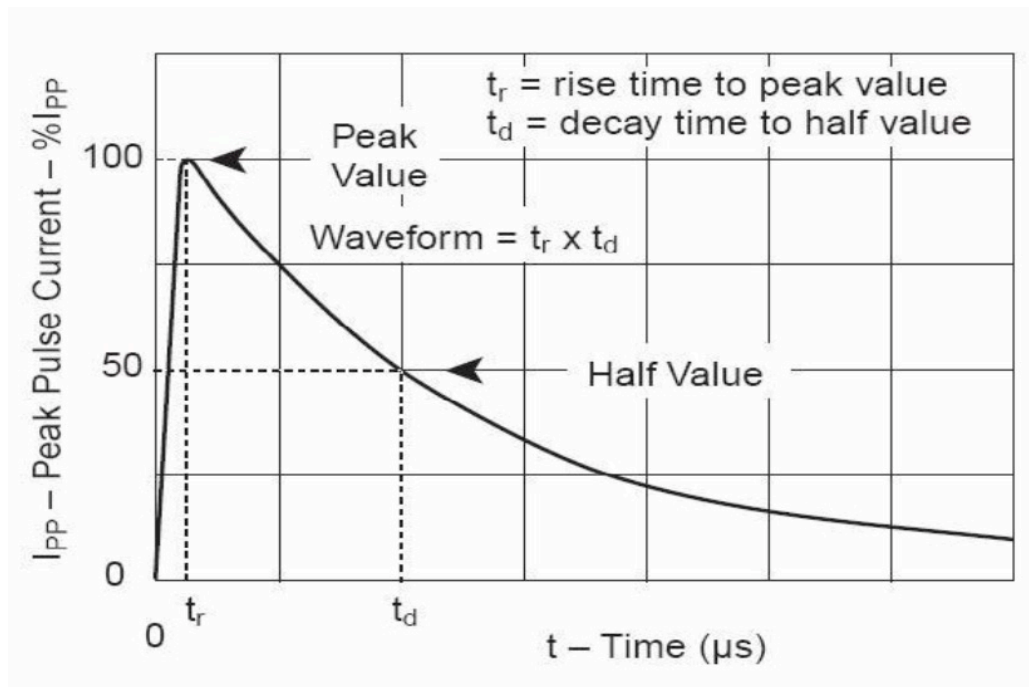

Tr -td Puls Wave-form


Soldering Parameters

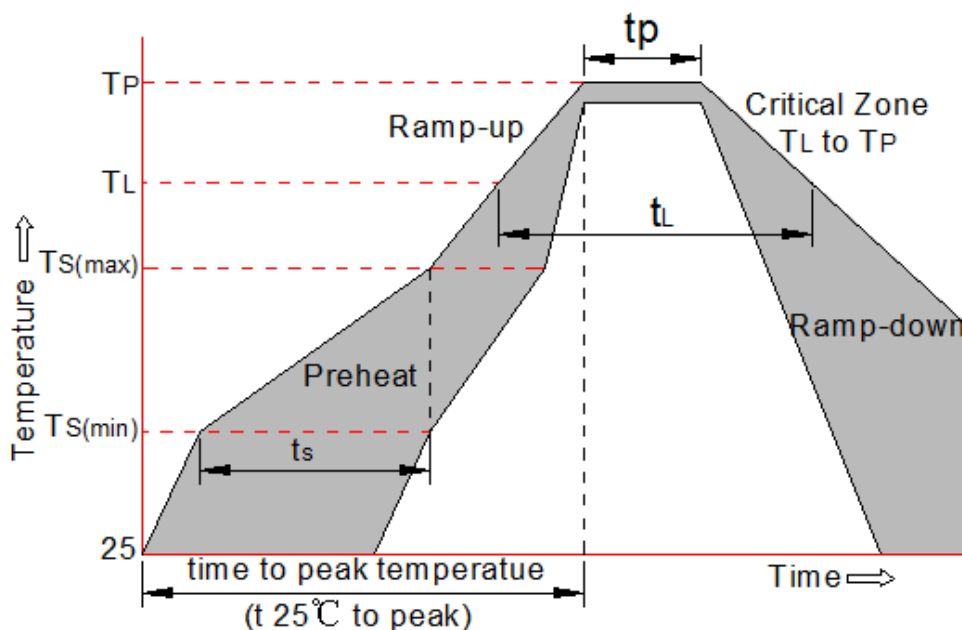

Soldering Condition		Pb-Free assembly
Pre Heat	-Temperature Min ($T_{S(min)}$)	+150°C
	-Temperature Max ($T_{S(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{S(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature (T_L) (Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

Package Mechanical Data (SMB)

Dimension	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.134	0.155	3.40	3.94
B	0.205	0.22	5.21	5.59
C	0.075	0.083	1.90	2.11
D	0.166	0.185	4.22	4.70
E	0.036	0.056	0.91	1.42
F	0.073	0.087	1.85	2.2
G	0.002	0.008	0.05	0.20
H	0.077	0.094	1.95	2.40
J	0.043	0.053	1.09	1.35
K	0.008	0.014	0.20	0.35
L	0.039	0.049	0.99	1.24

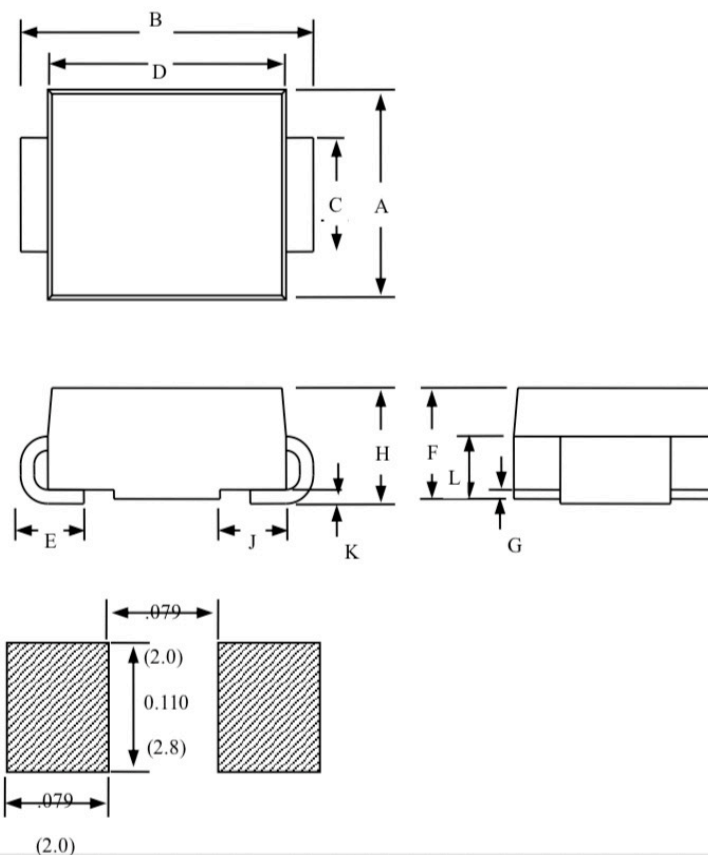

Contact Information

WPMTEK Incorporated Limited

Floor 1 Building 4#, Binxianghua Industry Park, No.7,

Huada Road, Hualian Community, Longhua New District, Shenzhen

TEL: 86755-29308003 FAX: 86755-23739900

WPMtek Incorporated Limited (WPM) reserves the right to make changes to the product specification and data in this document without notice. WPM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does WPM assume any liability arising from the application or use of any products or circuits, and specifically dis-claims any and all liability, including without limitation special, consequential or incidental damages.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [WPMtek](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#)
[CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#)
[ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#)
[P4KE91CATR](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#)