


# 金属化聚丙烯膜抗干扰电容器(X2类, 275Vac, 300Vac, 310Vac) Metallized polypropylene film interference suppression capacitor(Class X2, 275Vac, 300Vac, 310Vac)

## ■ 外形图 Outline Drawing

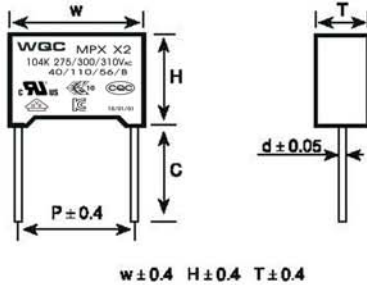

## ■ 特点

- 金属化聚丙烯膜
- 能承受过压冲击
- 优异的阻燃性能
- 广泛用于电源跨线路等抗干扰场合

## ■ Features

- Metallized polypropylene film
- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Widely used in across-the-line, interference suppression circuit, etc.

## ■ 安全认证 Safety Approvals

●		<b>CQC</b> (中国)	GB/T 14472-1993, X2, 275Vac, 300Vac, 310Vac, 0.0010uF~3.3uF, 40/110/56/B 证书号(Certificate No.):CQC14001113971
●		<b>ENEC-VDE</b> (欧盟)	EN 60384-14:2006-04, X2, 275Vac, 300Vac, 310Vac, 0.0010uF~3.3uF, 40/110/56/B 证书号(Certificate No.):40040406
●		<b>UL/CUL</b> (美国/加拿大)	UL 60384-14:2009, X2, 275Vac, 300Vac, 310Vac, 0.0010uF~3.3uF, 40/110/56/B 证书号(Certificate No.):E466405, CCN:FOWX2/8
●		<b>KC</b> (韩国)	KC 60384-14/1(2014-09), X2, 275Vac, 300Vac, 310Vac, 0.0010uF~3.3uF, 40/110/56/B 证书号(Certificate No.):SU03073-14001/14002/14003
●	<b>CB TEST CERTIFICATE</b>		IEC 60384-14:2005, X2, 275Vac, 300Vac, 310Vac, 0.0010uF~3.3uF, 40/110/56/B 证书号(Certificate No.):CN29302

## ■ 技术要求 Specifications

电容器类别 Class	X2类		
气候类别/阻燃等级 Climatic Category/Passive Flammability Category	40/110/56/B		
工作温度范围 Operating Temperature Range	-40℃ ~ +110℃		
额定电压 Rated Voltage	275Vac, 300Vac, 310Vac, 50/60Hz		
最大连续交流电压 Maximum continuous AC voltage	310Vac, 50/60Hz		
最大连续直流电压 Maximum continuous DC voltage	标准型 Normal Size	630Vdc	
	小型化 Miniaturization	560Vdc, C <sub>R</sub> < 1.0μF ; 520 Vdc, C <sub>R</sub> > 1.0μF	
电容量范围 Capacitance Range	0.0010μF~3.3μF		
电容量偏差 Capacitance Tolerance	± 10%(K)		
耐电压 Voltage Proof	引线之间 Between Terminals:	2 000Vdc(2s) C <sub>R</sub> < 1.0μF	
		1 800Vdc(2s) C <sub>R</sub> > 1.0μF	
	极壳之间 Between Terminals To Case:	2 120Vac(1min)	
绝缘电阻 Insulation Resistance	R > 15 000MΩ, C <sub>R</sub> < 0.33μF	(20℃, 100V, 1min)	
	RC > 5 000s, C <sub>R</sub> > 0.33μF		
损耗角正切 Dissipation Factor	0.0010μF < C <sub>R</sub> < 0.010μF	< 20 x 10 <sup>-4</sup> (1kHz, 20℃)	< 20 x 10 <sup>-4</sup> (10kHz, 20℃)
	0.010μF < C <sub>R</sub> < 0.47μF	< 10 x 10 <sup>-4</sup> (1kHz, 20℃)	< 20 x 10 <sup>-4</sup> (10kHz, 20℃)
	0.47μF < C <sub>R</sub> < 1.0μF	< 20 x 10 <sup>-4</sup> (1kHz, 20℃)	< 40 x 10 <sup>-4</sup> (10kHz, 20℃)
	1.0μF < C <sub>R</sub> < 3.3μF	< 30 x 10 <sup>-4</sup> (1kHz, 20℃)	-----

## 产品编码说明 Part number system

18 位产品代码如下(The 18 digits part number is formed as follow):

1    2    3    4    5    6    7    8    9    10    11    12    13    14    15    16    17    18

C	5	0															
---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

### 第 1~3 位 型号代码(Digit 1~3 Type Code):

型号代码:C50

### 第 4~5 额定电压代码(Digit 4~5 Rated Voltage Code):

	A	B	C	D	E	F	G	H	J	K	L	M	N
1			16	20				50	63			1100	
2	100	125	160	200	250	315	400	500	630	800	120		
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	1200	1400	
	P	Q	R	S	T	U	V	W	X	Y			
1	240	300	330	440	540	600	700	850	900				
2	275	305	350	450	520		760						
3	280	310		480									

说明: 参考日本 JIS 标准, 字母加数位表示交流, 数字加字母表示直流, 例如 A2 表示 100VAC, 2A 表示 100VDC

Explanation: Refer to JIS standard, Letter and then number indicate AC, but number and then Letter indicate DC, for example, 2A indicate 100VDC, A2 indicate 100VAC.

### 第 6~8 容值代码(Digit 6~8 Capacitance Expressed in 3-digit code 3 Code):

The first 2 digits indicate significant figures, and the third digit specifies the number of zero to follow.

前两位表示基数, 第三个数字表示其后零的个数

This gives the capacitance in picofarads. 容量值单位为皮法

For examples 举例:  $102=10 \times 10^2 \text{PF}=1,000\text{PF}=1.0\text{nF}=0.001\mu\text{F}$      $105=10 \times 10^5 \text{PF}=1,000,000\text{PF}=1000\text{nF}=1\mu\text{F}$

### 第 9 容量偏差代码(Digit 9 Capacitance Tolerance Code):

公差 Tolerance	±5%	±10%
代码 Code	J	K

### 第 10~11 两个数位的脚距代码(Digit 10~11 Pitch expressed by Case two digits Code):

#### Box Type 盒装型

Pitch 脚距	7.5	10	12.5	15	20	22.5	27.5	37.5	42.5	55
Case No. 壳体代码	B*	C*	G*	D*	S*	E*	F*	J*	K*	P*

### 第 12 引线加工型代码(Digit 12 Lead Form Code):

Lead Type

Code 代码	L	H	K	N	M	T	S
Lead Type 引线型式	长脚	短脚	内弯青蛙脚	内弯直脚	外弯直脚	Taping	Customer Special Require

### 第 13~15 引线长度和偏差以 3 个数字代码表示

Digit 13~15 Lead Length(Straight) and Tolerance of Lead Length(straight): Expressed in 3-Letter Code

Example 举例: Code 代码 035:35/10=3.5mm    230:230/10=23mm

### 第 16~18 内部特征码

Digit 16~18 Internal use Code

■外形尺寸 Dimensioms(mm)

275Vac/300Vac/310Vac							
CN ( $\mu$ F)	w	H	T	P	d	BOX TYPE	Part number
0.0010	10.5	9.0	4.0	7.5	0.6	B3LT	C50Q3102KB3L23****
0.0022	10.5	9.0	4.0	7.5	0.6	B3LT	C50Q3222KB3L23****
0.0047	10.5	9.0	4.0	7.5	0.6	B3LT	C50Q3472KB3L23****
0.0100	10.5	9.0	4.0	7.5	0.6	B3LT	C50Q3103KB3L23****
0.0220	10.5	9.0	4.0	7.5	0.6	B3LT	C50Q3223KB3L23****
0.0022	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3222KB5L23****
0.0047	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3472KB5L23****
0.010	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3103KB5L23****
0.033	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3333KB5L23****
0.039	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3393KB5L23****
0.047	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3473KB5L23****
0.056	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3563KB5L23****
0.068	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3683KB5L23****
0.082	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3823KB5L23****
0.10	10.5	12.0	6.0	7.5	0.6	B5LT	C50Q3104KB5L23****
0.0010	13.0	9.0	4.0	10.0	0.6	C1	C50Q3102KC1L23****
0.0022	13.0	9.0	4.0	10.0	0.6	C1	C50Q3222KC1L23****
0.0047	13.0	9.0	4.0	10.0	0.6	C1	C50Q3472KC1L23****
0.0010	12.0	11.0	5.0	10.0	0.6	C2	C50Q3102KC2L23****
0.0022	12.0	11.0	5.0	10.0	0.6	C2	C50Q3222KC2L23****
0.0047	12.0	11.0	5.0	10.0	0.6	C2	C50Q3472KC2L23****
0.010	12.0	11.0	5.0	10.0	0.6	C2	C50Q3103KC2L23****
0.033	12.0	11.0	5.0	10.0	0.6	C2	C50Q3333KC2L23****
0.039	12.0	11.0	5.0	10.0	0.6	C2	C50Q3393KC2L23****
0.047	12.0	11.0	5.0	10.0	0.6	C2	C50Q3473KC2L23****
0.056	12.0	11.0	5.0	10.0	0.6	C2	C50Q3563KC2L23****
0.068	12.0	11.0	5.0	10.0	0.6	C2	C50Q3683KC2L23****
0.082	12.0	11.0	5.0	10.0	0.6	C2	C50Q3823KC2L23****
0.10	12.0	11.0	5.0	10.0	0.6	C2	C50Q3104KC2L23****
0.047	13.0	12.0	6.0	10.0	0.6	C3	C50Q3473KC3L23****
0.056	13.0	12.0	6.0	10.0	0.6	C3	C50Q3563KC3L23****
0.068	13.0	12.0	6.0	10.0	0.6	C3	C50Q3683KC3L23****
0.082	13.0	12.0	6.0	10.0	0.6	C3	C50Q3823KC3L23****
0.10	13.0	12.0	6.0	10.0	0.6	C3	C50Q3104KC3L23****

275Vac/300Vac/310Vac							
CN ( $\mu$ F)	W	H	T	P	d	BOX TYPE	Part number
0.15	13.0	14.0	8.0	10.0	0.6	C5LT	C50Q3154KC5L23****
0.18	13.0	14.0	8.0	10.0	0.6	C5LT	C50Q3184KC5L23****
0.22	13.0	14.0	8.0	10.0	0.6	C5LT	C50Q3224KC5L23****
0.15	13.0	15.0	8.0	10.0	0.6	C8LT	C50Q3154KC8L23****
0.18	13.0	15.0	8.0	10.0	0.6	C8LT	C50Q3184KC8L23****
0.22	13.0	15.0	8.0	10.0	0.6	C8LT	C50Q3224KC8L23****
0.0010	18.0	11.0	5.0	15.0	0.8	D1	C50Q3102KD1L23****
0.0022	18.0	11.0	5.0	15.0	0.8	D1	C50Q3222KD1L23****
0.0047	18.0	11.0	5.0	15.0	0.8	D1	C50Q3472KD1L23****
0.010	18.0	11.0	5.0	15.0	0.8	D1	C50Q3103KD1L23****
0.033	18.0	11.0	5.0	15.0	0.8	D1	C50Q3333KD1L23****
0.039	18.0	11.0	5.0	15.0	0.8	D1	C50Q3393KD1L23****
0.047	18.0	11.0	5.0	15.0	0.8	D1	C50Q3473KD1L23****
0.056	18.0	11.0	5.0	15.0	0.8	D1	C50Q3563KD1L23****
0.068	18.0	11.0	5.0	15.0	0.8	D1	C50Q3683KD1L23****
0.082	18.0	12.0	6.0	15.0	0.8	D2	C50Q3823KD2L23****
0.033	18.0	12.0	6.0	15.0	0.8	D2	C50Q3333KD2L23****
0.039	18.0	12.0	6.0	15.0	0.8	D2	C50Q3393KD2L23****
0.047	18.0	12.0	6.0	15.0	0.8	D2	C50Q3473KD2L23****
0.056	18.0	12.0	6.0	15.0	0.8	D2	C50Q3563KD2L23****
0.068	18.0	12.0	6.0	15.0	0.8	D2	C50Q3683KD2L23****
0.082	18.0	12.0	6.0	15.0	0.8	D2	C50Q3823KD2L23****
0.10	18.0	12.0	6.0	15.0	0.8	D2	C50Q3104KD2L23****
0.12	18.0	12.0	6.0	15.0	0.8	D2	C50Q3124KD2L23****
0.15	18.0	12.0	6.0	15.0	0.8	D2	C50Q3154KD2L23****
0.18	18.0	12.0	6.0	15.0	0.8	D2	C50Q3184KD2L23****
0.22	18.0	12.0	6.0	15.0	0.8	D2	C50Q3224KD2L23****
0.12	18.0	13.5	7.5	15.0	0.8	D3	C50Q3124KD3L23****
0.15	18.0	13.5	7.5	15.0	0.8	D3	C50Q3154KD3L23****
0.18	18.0	13.5	7.5	15.0	0.8	D3	C50Q3184KD3L23****
0.22	18.0	13.5	7.5	15.0	0.8	D3	C50Q3224KD3L23****
0.22	18.0	14.5	8.5	15.0	0.8	D4	C50Q3224KD4L23****
0.27	18.0	14.5	8.5	15.0	0.8	D4	C50Q3274KD4L23****
0.33	18.0	14.5	8.5	15.0	0.8	D4	C50Q3334KD4L23****

275Vac/300Vac/310Vac							
CN ( $\mu$ F)	W	H	T	P	d	BOX TYPE	Part number
0.33	18.0	15.5	9.5	15.0	0.8	D5	C50Q3334KD5L23****
0.39	18.0	15.5	9.5	15.0	0.8	D5	C50Q3394KD5L23****
0.47	18.0	15.5	9.5	15.0	0.8	D5	C50Q3474KD5L23****
0.47	18.0	19.0	11.0	15.0	0.8	D7	C50Q3474KD7L23****
0.22	26.5	16.5	7.0	22.5	0.8	E2	C50Q3224KE2L23****
0.33	26.5	17.0	8.5	22.5	0.8	E3	C50Q3334KE3L23****
0.47	26.5	19.0	10.0	22.5	0.8	E4	C50Q3474KE4L23****
0.56	26.5	19.0	10.0	22.5	0.8	E4	C50Q3564KE4L23****
0.68	26.5	19.0	10.0	22.5	0.8	E4	C50Q3684KE4L23****
0.82	26.5	19.0	10.0	22.5	0.8	E4	C50Q3824KE4L23****
1.00	26.5	19.0	10.0	22.5	0.8	E4	C50Q3105KE4L23****
0.68	32.0	20.0	11.0	27.5	0.8	F1	C50Q3684KF1L23****
1.0	32.0	22.0	13.0	27.5	0.8	F2	C50Q3105KF2L23****
1.2	32.0	22.0	13.0	27.5	0.8	F2	C50Q3125KF2L23****
1.5	32.0	22.0	13.0	27.5	0.8	F2	C50Q3155KF2L23****
1.8	32.0	25.0	14.0	27.5	0.8	F3	C50Q3185KF3L23****
2.0	32.0	25.0	14.0	27.5	0.8	F3	C50Q3205KF3L23****
2.7	32.0	25.0	14.0	27.5	0.8	F3	C50Q3275KF3L23****
3.0	32.0	28.0	18.0	27.5	0.8	Fc	C50Q3305KFcL23****
3.3	32.0	28.0	18.0	27.5	0.8	Fc	C50Q3335KFcL23****

1. "\*\*\*\*"表示内部特征代码.Internal use.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Film Capacitors](#) category:*

*Click to view products by [WQC](#) manufacturer:*

Other Similar products are found below :

[M83421/01-3089R](#) [703-6G](#) [750-1018](#) [FKP1-1000160010P15](#) [FKP1-1500160010P15](#) [82EC1100DQ50K](#) [MMWAF150KME](#) [PCY2130F30153](#)  
[PME261JB5220KR19T0](#) [A521HH333M035C](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [QXM2G104K](#) [B32234-.033@250V-K](#) [B81133-C1104-](#)  
[M3](#) [MTC355L1](#) [217-0716-001](#) [PA225L30](#) [221A10-120](#) [CB182K0184J--](#) [KP1830-247/061-G](#) [SCD105K122A3-22](#) [SCD205K122A3-24](#)  
[PCX2339F65224](#) [PCX2339F65334](#) [2222 368 55105](#) [2222 370 21683](#) [QXL2E473KTPT](#) [445450-1](#) [46KI3100JBM1K](#) [MKP383510063JKP2T0](#)  
[MKT182022263473](#) [WMC08P22](#) [YE333](#) [ECQ-W4223KZ](#) [EEC2G805HQA415](#) [PA103L30](#) [82EC2150DQ50K](#) [WMF1D68](#)  
[PHE841ED6150MR17T0](#) [MTC55L4](#) [MTC56L4](#) [97F8038](#) [730P205X9400](#) [PA104L30](#) [82DC3220AA60J](#) [82CC4220AA70J](#) [82EC3100Z370J](#)  
[B32656S8105K566](#) [EEC2G105HQA401](#)