

Series TX2

SEAM SEALED CERAMIC 2.5 X 2.0mm SMD



FEATURE

- High precision and high frequency stability
- Excellent heat resistance and environmental characteristics.
- Applications in PDA,DSC,DVC and PC.
- RoHS compliant and Pb free.

ELECTRICAL SPECIFICATIONS


Output Frequency Range	16.000 MHz to 54.000 MHz
Mode	see Table 1*
Frequency Tolerance (at 25°C)	±10ppm,±30ppm or specify
Frequency Stability Over Operating Temperature Characteristics	±10ppm,±30ppm or specify
Operating Temperature Range	-10 °C to +60 °C -20 °C to +70 °C -40 °C to +85 °C or specify
Storage Temperature Range	-55 °C to + 125 °C
Shunt Capacitance (C ₀)	3.0 pF Max
Driver Level (Typical)	1μW~100μW
Load Capacitance(C _L)	Series, 8pF, 10pF, 12pF or specify
Aging @25°C 1 st year (Max)	±3ppm/year max
Shock Resistance	Drop test of 3 times on 2mm stainless plate from 75cm height

REMARK: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. PLEASE CONFIRM WITH OUR SALES ENGINEER.


EQUIVALENT SERIES RESISTANCE (ESR) (Table 1)

<u>Frequency Range</u>	<u>E.S.R(Ω)</u>	<u>Mode</u>
16~30MHz	100 Ω Max	AT/Fundamental
30~54MHz	60 Ω Max	AT/Fundamental

Series TX2
SEAM SEALED CERAMIC 2.5 X 2.0mm SMD
Dimension

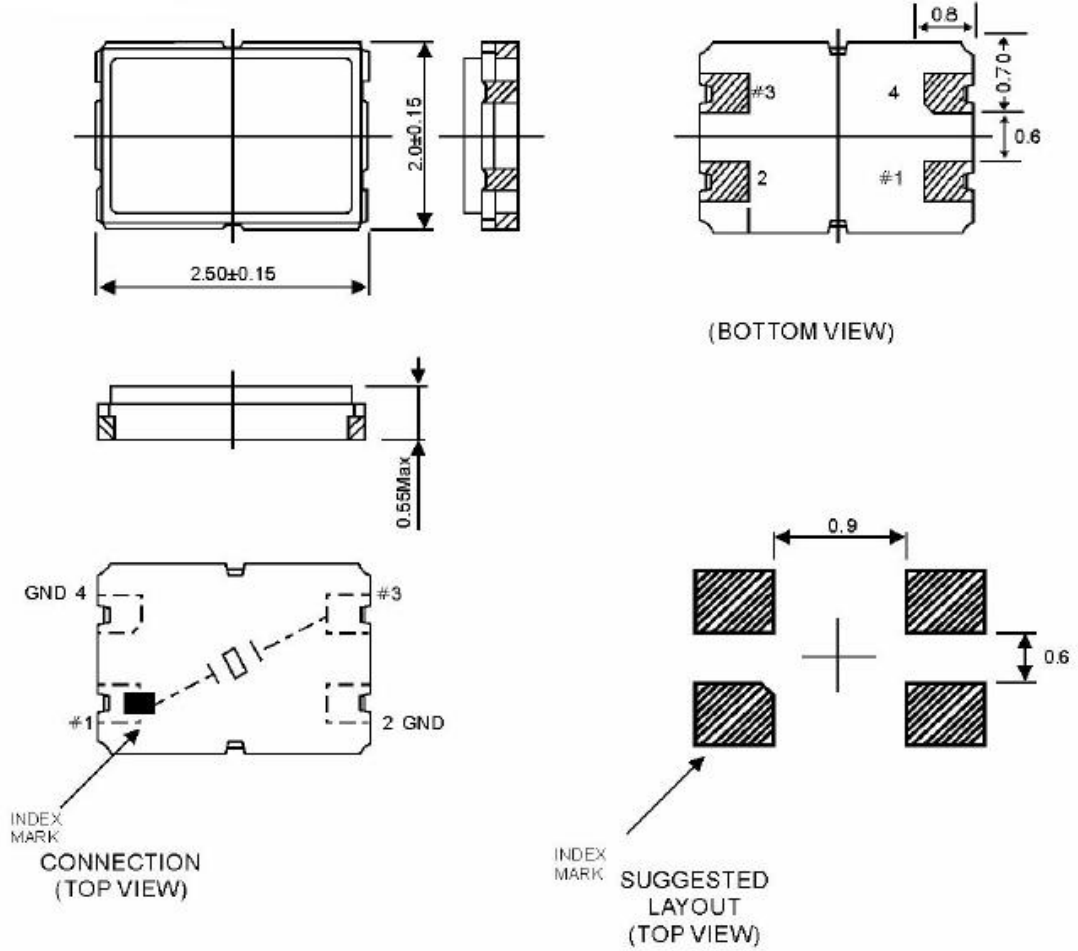

Re-flow condition

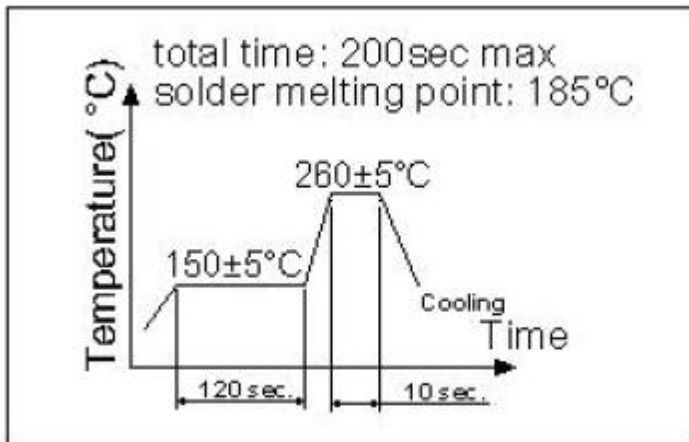

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [WTL](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)