

SMD Glass Sealed Ceramic 6.0×3.5×1.2 mm

Feature


- 2 pads SMD glass sealed pads crystal units
- High reliable environmental performance
- Tight tolerance and stability parts are available
- Designed for automatic mounting and reflow soldering
- Contains Pb in sealing glass exempted by RoHS directive



□ Electrical Specifications

Item	Specifications
Frequency Range(MHz)	14.7456
Mode	AT/Fundamental
Load Capacitance (CL)	18pF
Frequency Tolerance(at 25°C)	±10ppm ~ ±50ppm
Operating Temperature Range	-20~+70°C
Frequency Stability Over Operating Temperature Range	±10ppm ~ ±50ppm
Equivalent Series Resistance (ESR) max.	40Ω
Storage Temperature Range	-55~+125°C
Shunt Capacitance(C ₀)	5pF Max
Drive Level (Typical)	1 ~ 100μW (100μW typical)
Aging @25°C 1st Year (Max)	±3 ppm/year

Dimension(mm)

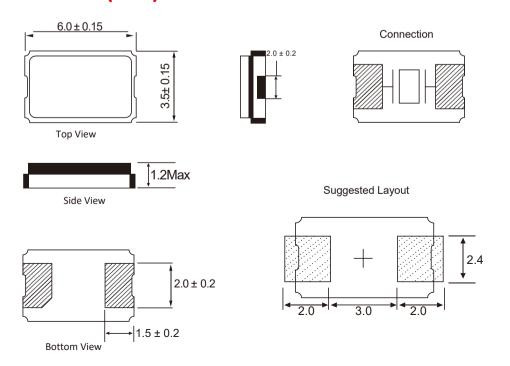

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals category:

Click to view products by WTL manufacturer:

Other Similar products are found below:

CX3225GB25000M0PPSZ1 718-13.2-1 MC405 32.0000K-R3:PURE SN 7A-40.000MAAE-T FL2000085 99-BU 9B-15.360MBBK-B 9C-7.680MBBK-T H10S-12.000-18-EXT-TR ABC2-6.000MHZ-D4Z-T ABLS-20.000MHZ-D2-T ABS071-32.768KHZ-6-T R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 ABL-27.000MHZ-B4Y-T ABM11-132-24.000MHZ-T3 ABM3B1-25.000MHZ-D2Y-T SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7A-24.576MBBK-T 7B-30.000MBBK-T 7A-14.31818MBBK-T 6504-202-1501 6526-202-1501 ABLS-12.000MHZ-B2Y-T 7A-10.000MBBK-T SG636PCE-20.000MC 3404 E1SAA18-25.000M TR CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R ABM11-16.000MHZ-9-B1U-T FL5000014 EUCA18-3.1872M FX0800015 425F35E027M0000