

Series WX5

Resistance Welded HC-49/U Package



FEATURE

- Height 13.46mm
- A resistance weld completely sealed type
- The tight frequency stability
- Copes with high density mounting and is the optimum for mass production



ELECTRICAL SPECIFICATIONS

Nominal frequency:	1.8432MHz to 150.000MHz
Oscillation mode:	See below table
Operating temperature range	-20°C--+70°C (Typical), -10°C ~ +60°C, -40°C ~ +85°C, or specify
Storage temperature range	-40°C--+85°C
Frequency tolerance:	± 30PPM at 25±2°C (Typical), or specify
Frequency stability	± 50PPM over -20~70°C (Typical), or specify
Load capacitance:	16pF, 18pF, 20pF, 30pF, series, or specify
Equivalent series resistance	See below table
Parallel capacitance(Co):	7PF Max
Drive level	100 μW Typical
Insulation resistance:	More than 500MΩ AT DC100V


EQUIVALENT SERIES RESISTANCE(ESR) AND OSCILLATION MODE

Frequency Range	E.S.R (Ω)	Mode	Frequency Range	E.S.R (Ω)	Mode
1.843MHz~1.999MHz	350Max	Fundamental/AT	7.000MHz~9.999MHz	30Max	Fundamental/AT
2.000MHz~2.399MHz	300Max	Fundamental/AT	10.000MHz~12.999MHz	20Max	Fundamental/AT
2.400MHz~2.999MHz	200Max	Fundamental/AT	13.000MHz~30.000MHz	20Max	Fundamental/AT
3.000MHz~3.199MHz	150Max	Fundamental/AT	24.000MHz~29.999MHz	50Max	Third Overtone/AT
3.200MHz~3.499MHz	100Max	Fundamental/AT	30.000MHz~65.000MHz	40Max	Third Overtone/AT
3.500MHz~3.899MHz	90Max	Fundamental/AT	60.000MHz~99.999MHz	90Max	Third /Fifth Overtone/AT
3.900MHz~4.099MHz	70Max	Fundamental/AT	90.000MHz~120.000MHz	90Max	Fifth overtone /AT
4.100MHz~5.999MHz	60Max	Fundamental/AT	120.000MHz~150.000MHz	90Max	Seventh overtone /AT
6.000MHz~6.999MHz	50Max	Fundamental/AT			

Series WX5

Resistance Welded HC-49/U Package

Dimension

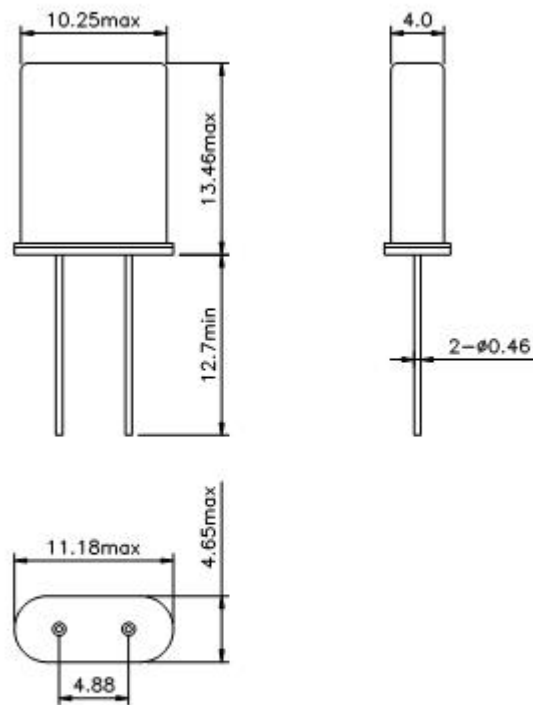

All dimensions are in mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [WTL](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)