

TECHNICAL CHARACTERISTICS

SPECIFICATION

- >Contact Rating:
 - Switching: 25mA, 24VDC
 - Non-Switching: 100mA, 50VDC
- >Contact Resistance:
 - Initial: 50mOHM max.
 - After Life Test: 100mOHM max.
- >Insulation Resistance: min. 100MOHM at 500VDC
- >Dielectric Strength: 500VAC for 1 minute
- >Operating Force: 1000g max.
- >Mechanical Life: min. 5000 cycles
- >Electrical Life: 2000 cycles / 25mA, 24VDC
- >Raise Actuator Type

MATERIAL

- >Cover: PPS UL 94V-0, color Black
- >Base: HTN UL 94V-0, color Black
- >Actuator: PA 46 UL 94V-0, color White
- >Contact: Gold Plated
- >Terminal: Tin Plated

SOLDERING INFORMATION



- >Terminal in SMD version
- >Reflow soldering according to JEDEC J-STD 020 Hot Air
- >Keep in "off" position during soldering
- >For cleaning or washing only with top tape sealed
- >VPH Heating Process not recommended

ENVIRONMENTAL





- >Storage condition: -40°C ~ +85°C
- >Operation condition: -40°C ~ +85°C
- >Compliance: Lead Free, ROHS, Reach

PACKAGING INFORMATION

- >Tape & Reel Packaging only
- >On delivery in "off" position

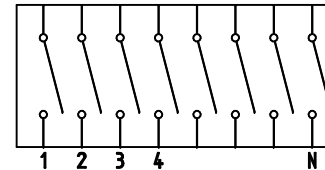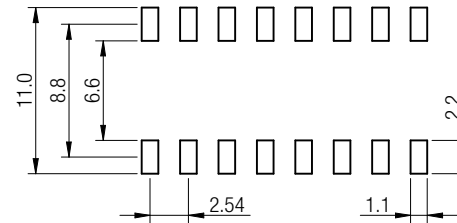

Wiring Diagram

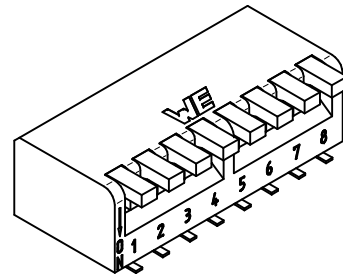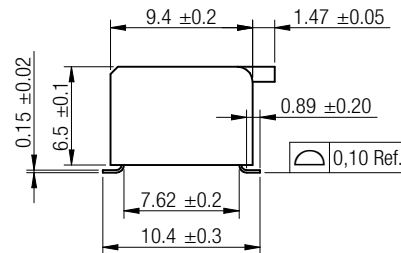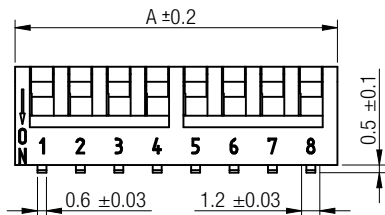

| DIMENSION | | | | | | | |
|-------------|-------|-------|-------|-------|-------|-------|--|
| No.Of Pole | 2 | 3 | 4 | 5 | 6 | 7 | |
| Dim. A (mm) | 6.08 | 8.62 | 11.16 | 13.70 | 16.24 | 18.78 | |
| No.Of Pole | 8 | 10 | 12 | | | | |
| Dim. A (mm) | 21.32 | 26.40 | 31.48 | | | | |

Scale - 2:1

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

| | | | | | | | |
|-----|--------------|------------|----|--------------------------------|------------------|----------------------------|---|
| | | Projection | | GENERAL TOLERANCE | | Basic material | |
| | | | | .x = +/- 0,2 .xx = +/- 0,15 | | | |
| | | | | Date | Name | DESCRIPTION | |
| | | | | Drawn | 09-02-23 | Jelisarow | WE-SWITCH_BOX_Type, Piano type |
| | | | | Checked | | | SMD version, raise Actuator without top tape sealed |
| | | | | Würth Elektronik RDX | | Scale | 2:1 |
| | | | | | | Position | |
| | | | | | | Drawing.- No. 4183112708xx | |
| | | | | | | SIZE | |
| q | warning text | 11-10-26 | WJ | | | A4 | |
| REV | FILE | DATE | BY | EDV NO | 4183112708xx.dft | System Solid Edge V20 | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wurth manufacturer](#):

Other Similar products are found below :

[687001](#) [742700](#) [74437349220](#) [744741101](#) [750314624](#) [750341638](#) [31402](#) [686626050001](#) [744741471](#) [744772681](#) [744777](#) [749119950](#)
[750312504](#) [890334025009](#) [IC-744885](#) [875115350002](#) [865230143004](#) [600690282801](#) [178050601](#) [615008138221](#) [750311898](#) [744999](#)
[7446823003](#) [7446323004](#) [744028](#) [66201621822](#) [7446221012](#) [744720](#) [760895431](#) [760895651](#) [662006236022](#) [64900621822](#) [418117270910](#)
[890334026014](#) [744839208072](#) [744762A/RFI](#) [74651174R](#) [744838180160](#) [885300](#) [750310346](#) [861011384014](#) [750817018](#) [3020903](#) [885342](#)
[2603019321001](#) [2603019021001](#) [2606039021001](#) [2608019324001](#) [2607019213001](#) [2605039241001](#)