

1

2

3

4

5

TECHNICAL CHARACTERISTICS

MATERIAL  
COLOR: BLACK  
STYLE: UL1007

ENVIRONMENTAL  
OPERATING TEMPERATURE: -20°C UP TO 80°C  
COMPLIANCE: LEAD FREE AND ROHS

WIRE DIMENSION  
AWG: 20


PACKAGING  
10 PCS/BAG

A

B

C

D

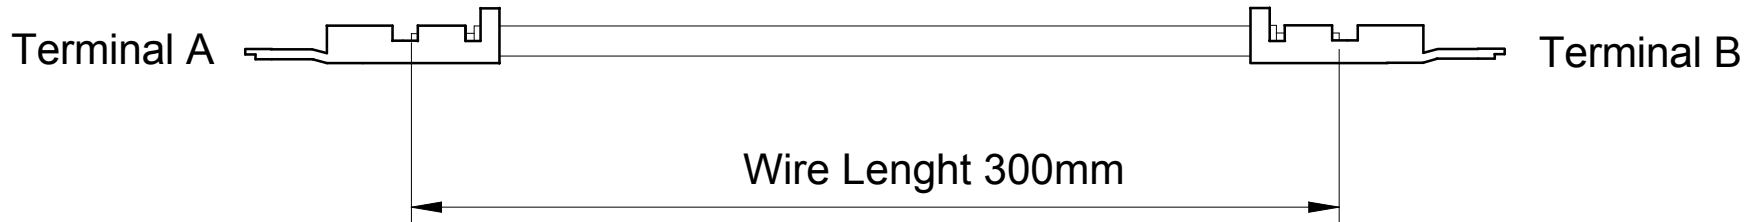

Terminal A	662 002 137 22
Terminal B	662 002 137 22

RoHS Compliant

G			
F			
E			
D			
C			
B			
A	18-OCT-11	PDF	GG
REV	DATE	FILE	BY

PROJECTION:

GENERAL TOLERANCE  
.X = +/- 0.2  
.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM  
SCALE:  
SHEET: 1/2  
DRAW: QL

DESCRIPTION: WR-MPC3 MALE PRE-CRIMPED CABLE  
WERI PART NO: 662 262 220 030

SIZE  
**A4**

1

2

3

4

5


A

B

C

D

Note:  
 1.Dimension  
 Carton Size:40\*30\*20(CM)  
 2.Quantity: 5000 Pcs/Carton

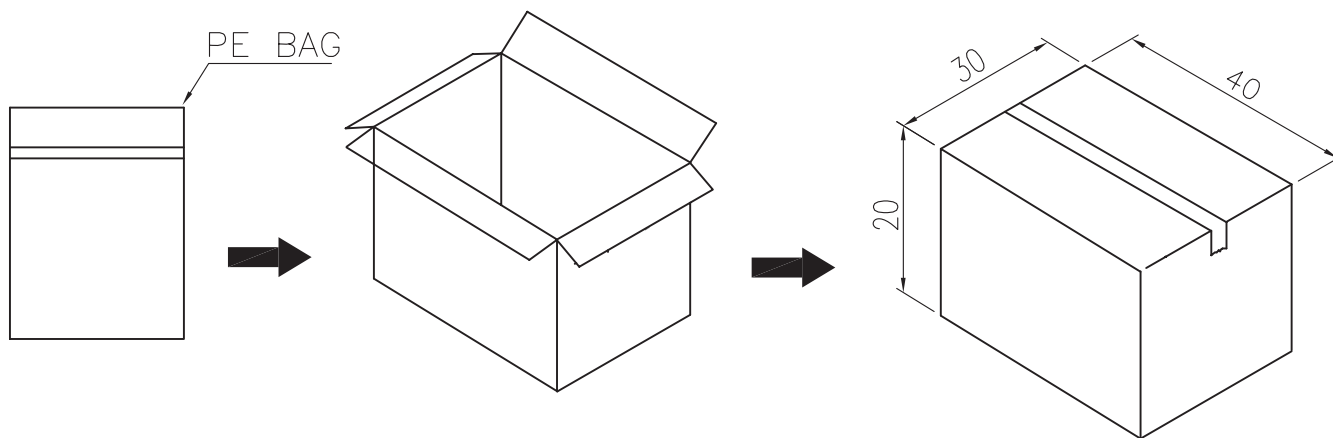

RoHS Compliant

G			
F			
E			
D			
C			
B			
A			
REV	DATE	FILE	BY

PROJECTION:

GENERAL TOLERANCE  
 .X = +/- 0.2  
 .XX = +/- 0.15

**WÜRTH ELEKTRONIK**

APPROVAL: RJ

UNIT: MM  
 SCALE:  
 SHEET: 2/2  
 DRAW: QL

DESCRIPTION: WR-MPC3 MALE PRE-CRIMPED CABLE  
 WERI PART NO: 662 262 220 030

SIZE  
**A4**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialised Cables](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[603PT6](#) [603SS6L](#) [604PT6](#) [604SS6](#) [706000D02F200](#) [910640](#) [1200740077](#) [1200740114](#) [AC172](#) [ACL-SSI-4](#) [R88ACAKA0015SRE](#)  
[R88ACAWL005SDE](#) [R88ACRGD0R3C](#) [1300150047](#) [1300660036](#) [1302262116](#) [1300150149](#) [1300220020](#) [1300220104](#) [1300220119](#)  
[1301240492](#) [1301810221](#) [1365323-1](#) [1613055](#) [176P12](#) [1971465-2](#) [20240400003](#) [20240400013](#) [2085828-1](#) [20886510030](#) [2-22733-8](#) [22733-](#)  
[8](#) [CB-5PSBC-RS](#) [CB-704EC-RS](#) [CB-BATACC-RS](#) [CB-JST3PSW-RS](#) [CB-M12COM-R10](#) [25AC84](#) [25AK84X](#) [25AU25](#) [25FN82](#) [3011-03](#)  
[AC118](#) [ACL-HHS-1M\(CAT5E\)](#) [SSL009PC2DC012N](#) [FC2A-KC6C](#) [2085828-2](#) [20886510150](#) [CCS-FCB-5](#) [CCSFCBF2](#)