
Dimensions: [mm]

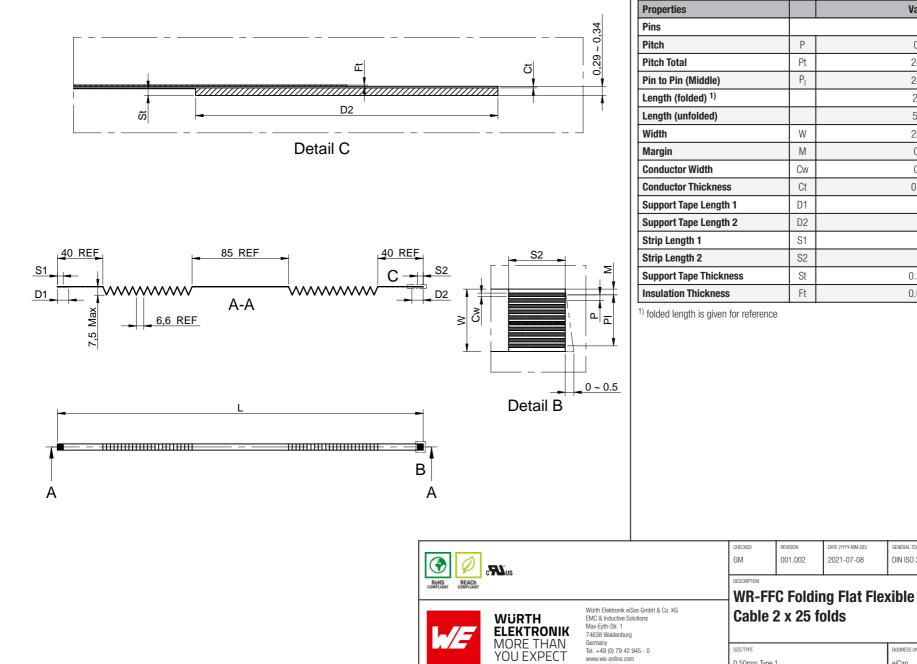

Article Properties:

_			
	Value	Unit	Tol.
	50		
Р	0.5	mm	±0.05mm
Pt	24.5	mm	±0.08mm
P _I	24.5	mm	±0.08mm
	280	mm	±10mm
	500	mm	±10mm
W	25.5	mm	±0.08mm
Μ	0.5	mm	±0.08mm
Cw	0.3	mm	±0.02mm
Ct	0.05	mm	±0.01mm
D1	8	mm	±2mm
D2	8	mm	±2mm
S1	4	mm	±1mm
S2	4	mm	±1mm
St	0.225	mm	±0.01mm
Ft	0.043	mm	±0.01mm
	Pt P1 W W M Cw Ct D1 D2 S1 S2 St	50 P 0.5 Pt 24.5 P ₁ 24.5 Q80 280 W 25.5 M 0.5 Cw 0.3 Ct 0.05 D1 8 D2 8 S1 4 S2 4 St 0.225	50 P 0.5 mm Pt 24.5 mm P1 24.5 mm P1 24.5 mm Q280 mm mm Q2 Q25.5 mm Q2 Q3 mm Q2 Q3 mm Q2 Q3 mm Q2 Q3 mm Q3 Q4 mm St Q.225 mm

PROJECTION METHOD

687650225002

ORDER CODE

STATUS

 $\overline{\bigcirc}$

PAGE

GENERAL TOLERANCE

BUSINESS UNIT

DIN ISO 2768-1m

0.50mm Type 1 1/5 Valid eiCan eiSos@we-online.com This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety releases to safety must be performed on every electronic component which is used in electrical incuruits and enditions or performance.

Kind Properties:

Durability 20 Mating cycles

Material Properties:

Insulator Material	PET (White)
Tape Material	PET (Blue)
Contact Material	Copper
Contact Plating	Tin

General Information:

Operating Temperature	-30 up to +105 °C
Heat Resistance	110 °C x 96 HRS
Flammability Rating according to	UL SUB.758
Moisture Resistance	40 °C, 95 % RH x 96 HRS

Electrical Properties:

Properties		Test conditions	Value	Unit	Tol.
Rated Current	I _R		0.5	А	max.
Working Voltage			60	V	
Insulation Resistance	R _{ISO}	500 V (DC)	1000	MΩ	min.
Withstanding Voltage		1 min No Breakdown	500	V (AC)	
Conductor Resistance	R		1.4	Ω/m	max.
Contact Resistance	R		20	mΩ	max.

Mechanical Properties:

Properties	Test conditions	Value	Unit	Tol.
Elongation of Insulator		60	%	min.
Tensile strength		35	N/mm²	min.
Flexing test	180°	20	Times	min.
Abrasion		10000	Times	min.

Certification:

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
cULus Approval	E328849


Packaging Properties:

Packaging Bag

REACh	c N us		CHECKED GM DESCRIPTION	REVISION 001.002	DATE (YYYY-MM-DD) 2021-07-08	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		€-
F	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions		WR-FFC Folding Flat Flexible Cable 2 x 25 folds				ORDER CODE 687650225002			
7	MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/type 0.50mm Type ⁻	1		BUSINESS UNIT eiCan	status Valid			PAGE 2/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nucleac protocil, transportation (automotive control, transportation signal, disaster prevention, medical, public information network etc... Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits after quire high safety and reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits and the reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits and the reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits and the reliability for any electronic or performance.

۲ RoHS

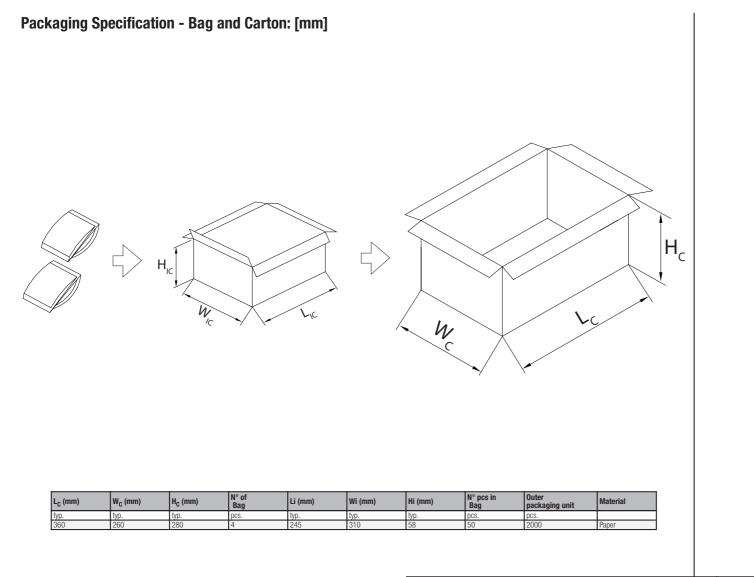

	c Al us		CHECKED GM	REVISION 001.002	DATE (YYYY-MM-DD) 2021-07-08	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		€-
ROHS REACH COMPLIANT COMPLIANT			DESCRIPTION	C Foldi	na Flat Fle	xible				
-//=	WÜRTH ELEKTRONIK	Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany		Uabic Z A ZJ IUlus		ORDER CODE 687650225002				
	MORE THAN YOU EXPECT	elemany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	size/type 0.50mm Type	1		BUSINESS UNIT eiCan	status Valid			PAGE 3/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Cautions and Warnings:

The following conditions apply to all goods within the product series of the Connectors of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This mechanical component is designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
 equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
 ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
 especially required and/or if there is the possibility of direct damage or human injury.
- Mechanical components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The mechanical component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the component may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Prevent any damage or scratches on the component, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
 Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
- World Elektronik products are qualified according to international standards, which are inseed in each product reliability report, with Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.
- The mechanical component is designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot ensure the reliability of these components while being used with other products.

Product Specific:

Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.

Cleaning and Washing:

- Washing agents used during the production to clean the customer application might damage or change the characteristics of the component, body, pins and termination. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process may deform function relevant areas. Therefore, we do not recommend using a brush during the PCB cleaning process.

Potting and Coating:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the components. Expansion could damage the components. We
recommend a manual inspection after potting or coating to avoid these effects.

Storage Conditions:

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

Packaging:

• The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

Handling:

- Do not repeatedly operate the component with excessive force. It may damage or deform the component resulting in malfunction.
- In the case a product requires particular handling precautions, in addition to the general recommendations mentioned here before, these
 will appear on the product datasheet.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

		GM	001.002	DATE (YYYY-MM-DD) 2021-07-08	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	-	₽-	
RoHS REACH Compliant compliant					ng Flat Flex	xible				
WÜRTH BLEKTRONIK ELEKTRONIK KAS Inductive Solutions Max Eyth-Str. 1 74638 Waldenburg		Cable :	2 x 25 f	olds		ORDER CODE	650225	002		
	MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	size/type 0.50mm Type	1		BUSINESS UNIT eiCan	status Valid			PAGE 4/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc... Wurth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in elevital circuits the reliability standard, subjective to instead on every elevitient of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in elevital circuits there are every elevitation every elevitation component there are every elevitated to every elevitation component there are every elevitation there are every elevitation to every elevitation component there are every elevitation there are every elevitation there are every elevitation there are every elevitation to every elevitation component there are every elevitation there are every elevitation there are every elevitation

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

	c AL us		CHECKED GM	REVISION 001.002	DATE (YYYY-MM-DD) 2021-07-08	general tolerance DIN ISO 2768-1m		METHOD -E	- (
ROHS REACH COMPLIANT COMPLIANT			DESCRIPTION	C Foldir	ng Flat Flex	kible		-	
WÜRTH ELEKTRONIK UDDEF TUAN		Cable 2	2 x 25 fo	olds		ORDER CODE			
-//=				_			6870	650225002)

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG products are neither designed on rinended for use in areas such as military, aerospace, availation, nuclear control, train control, ship control, train control, ship control, train control, t

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for FFC / FPC Jumper Cables category:

Click to view products by Wurth manufacturer:

Other Similar products are found below :

8-1474659-7 FSK-21.5A-20 FSK-23A FSK-72.5KD-17 FSN-14.5A-6 FSN-26A FST-2.75A 9-1474653-6 1474494-5 1474448-1 1557385-1 2-1437211-4 22034.1 2-6447164-4 1-6437133-3 1-6437151-8 FSK-11A FSN-21.5A-32 FSN-24A FSP-23A-11 2-1437181-9 4-1437186-9 4-1474659-8 3-1437144-3 3-1474654-4 4-1437180-7 5-1437166-5 5-1474653-2 5-1474654-9 1-1474671-7 1-1474612-2 6-6437158-0 5-1474653-4 D130361-5 6-1437180-7 2-1474640-4 1474544-1 7-6474640-3 8-1474566-1 8-1474644-8 1-1437164-8 8-1474653-5 9-1474653-5 151680990 08-015-173 5-1437209-2 1437190-1 2-6437158-6 3-1437213-7 FSK-11.25A-40