Pins

Length


Length

Length

5.5

L₂

mm

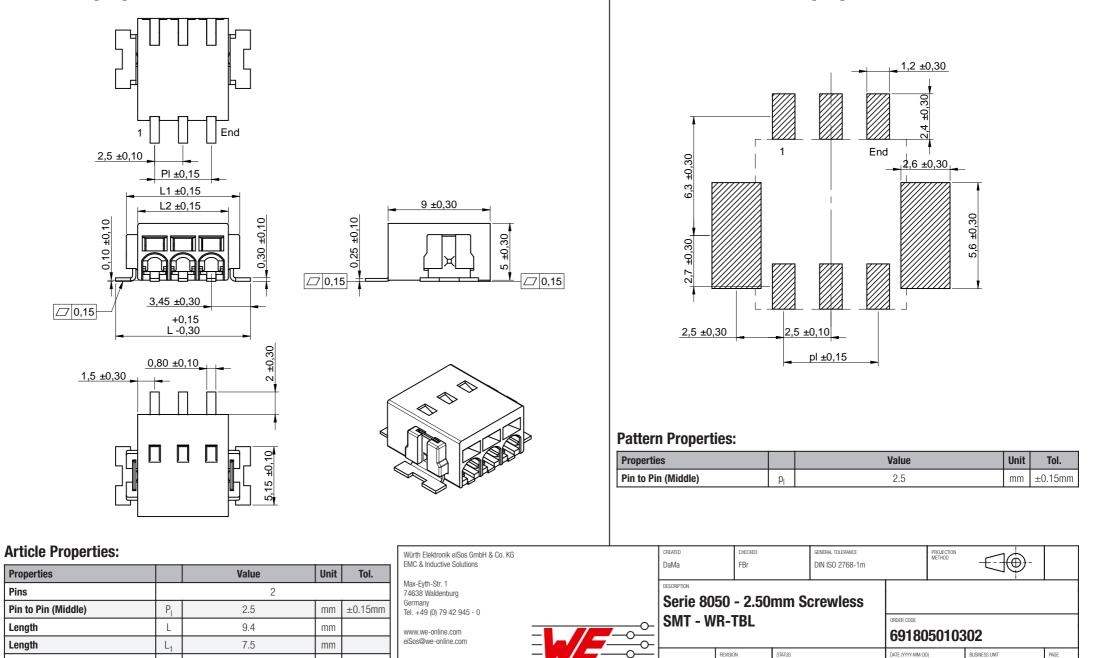

Recommended Land Pattern: [mm]

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, Moreover Wirth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in elevitical circuits that require high safety and reliability realization checks for safety must be performed on every electronic component which is used in elevitaci circuits that require high safety and reliability realization checks for safety must be performed.

റ

WÜRTH ELEKTRONIK

001.000

Valid

2017-03-24

eiCan

1/5

Article Properties:

Pins	PI	L	L ₁	L ₂	Order Code
2	2.5 mm	9.4 mm	7.5 mm	5.5 mm	691805010302
3	5.0 mm	11.9 mm	10.0 mm	8.0 mm	691805010303

Kind Properties:

Properties		Value Unit				
Standard Polarities ¹⁾		02;03				
Pitch	Р	2.5 m				

¹⁾ Delivery ex stock for standard polarities, non standard have extended leadtimes

Material Properties:

Insulator Material	LCP			
Insulator Flammability Rating	UL94 V-0			
Insulator Color	Black			
Contact Material	Brass			
Contact Plating	Tin over Nickel			
Spring Material	Copper Alloy			

Mechanical Properties:

Wire Strip Length	6 up to 7 (mm)					
Wire Properties:						
Solid Wire Section (Imperial)	26 to 20 (AWG)					

Solid wire Section (Imperial)	26 t0 20 (AWG)
Solid Wire Section (Metric)	0.129 to 0.518 (mm ²)
Stranded Wire Gauge Tin Dipped (Imperial)	26 to 20 (AWG)
Stranded Wire Section Tin Dipped (Metric)	0.129 to 0.518 (mm ²)

Standard:

cULus Approval	E323964
UL Approval	E323964

Packaging Properties:

Packaging	Tape and Reel				
Packaging Unit (Qty.)	700				

General Properties:

Operating Temperature	-45 °C up to +130 °C		
Compliance	Lead free / RoHS		


Electrical Properties:

Properties	Test conditions		Value			Tol.
rioperues			UL	cULus	Unit	101.
Rated Current		I _R	6	3	Α	
Working Voltage			300	300	V (AC)	
Withstanding Voltage	1 min		1600	1600	V (AC)	
Contact Resistance		R	20		mΩ	max.

Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions		CREATED DaMa	CHECKED FBr		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com		Serie 8050 - 2.50mm Screwless SMT - WR-TBL				ORDER CODE 69180	50103	802	
		1 1	evision 001.000	status Valid		DATE (YYYY-MM-DD 2017-03-24)	BUSINESS UNIT eiCan	PAGE 2/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in therefore a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, before the design-in stage, in addition, sufficient reliability transportation isgnal, disaster prevention, medical, public information network etc.. Wirth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require high safety and reliability for the safety and reliability for the reliability for the safety and reliability for the

Classification Reflow Profile for SMT components:

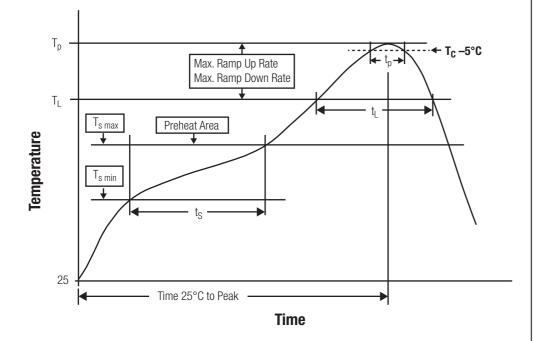

Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min ¹⁾	T _{s min}	150 °C
Preheat Temperature Max	T _{s max}	200 °C
Preheat Time ${\rm t_s}$ from ${\rm T_s}_{\rm min}$ to ${\rm T_s}_{\rm max}$	t _s	60 - 120 seconds
Ramp-up Rate (T _L to T _P)		3 °C/ second max.
Liquidous Temperature	Τ _L	217 °C
Time t_L maintained above T_L	t	60 - 150 seconds
Peak package body temperature	Т _р	see table
Time within 5°C of actual peak temperaure	tp	20 - 30 seconds
Ramp-down Rate (T _L to T _P)		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

¹⁾ refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature:

Properties	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly Package Thickness < 1.6 mm ¹⁾	260 °C	260 °C	260 °C
PB-Free Assembly Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly I Package Thickness \geq 2.5 mm	250 °C	245 °C	245 °C

¹⁾ refer to IPC/JEDEC J-STD-020D refer to IPC/ JEDEC J-STD-020E

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED DaMa	CHECKED FBr		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	Serie 805		mm So	crewless				-
www.we-online.com eiSos@we-online.com	SMT - WR	-IRL			ORDER CODE	50103	802	
		VISION D1.000	status Valid		DATE (YYYY-MM-DD 2017-03-24	,	BUSINESS UNIT eiCan	PAGE 3/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety releases to safety must be performed on every electronic component which is used in electrical incuruits and enditions or performance.

Cautions and Warnings:

The following conditions apply to all goods within the product services of the Connectors of Würth Elektronik eiSos GmbH & Co. KG:

General:

- This electronic component is designed and developed with the intention for use in general electronics equipment.
- Before incorporating the components into any equipment in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.
- In addition, even electronic component in general electronic equipment, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed by the user before usage.
- The connector is designed and manufactured to be used within the datasheet specified values
- Do not use the connector outside the datasheet specifications.
- Prevent any damage or scratches on the connector, especially on the actuator.
- Direct mechanical impact to the product shall be prevented (e.g overlapping of the PCB's).
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specification for standard products do also apply to customer specific products.
- The Connectors are designed to be used along with Würth Elektronik counterparts and tools. Würth Elektronik cannot insure the
 reliability of these components while being used with other products.

Product Specific:

Soldering:

- The solder profile must comply with the WE technical soldering specification, otherwise this will void the warranty.
- Other soldering methods are not verified and have to be validated by the customer at his own risk.

Cleaning and Washing:

- Parts are not constructed for washing, so washing can cause malfunction afterwards.
- Cleaning agent that are used to clean the customer applications might damage or change the characteristics of the component, body, pins and termination.
- Please do not submerse our washable products into water or cleaning agents or put them in locations exposed to water completely.
- When cleaning by hand (brushing), please do not use excessive force on our connectors to avoid malfunction afterwards, because
 customer could deform function relevant areas.
- We recommended a solution without organic acid (preserve the plating against corrosion) volatile, without residues and compatible with the plastic.

• We recommend to perform tests and to let a part in immersion in the solution 8 to 12 hours and see if there is a degradation.

Storage Conditions:

 The Connectors are considered MSL1 into closed original packaging and are not subject to storage time limits regarding the moisture sensivity but all products shall be used before the end of the period of 12 months based on the products date code, if not 100% solderability can't be warranted.

Handling:

- Do not repeatedly operate the connector with excessive force. It may damage or deforms the contact dome which results in malfunction.
- In the case a product requires particular handling precautions, in addition to the general recommendations mentioned here before, these
 will appear on the product datasheet.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED DaMa	CHECKED FBr		general tolerance DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	DESCRIPTION Serie 805		mm So	crewless				•
www.we-online.com eiSos@we-online.com	SMT - WF	R-TBL			ORDER CODE	50103	602	
		evision 001.000	status Valid		DATE (YYYY-MM-DD 2017-03-24)	BUSINESS UNIT eiCan	page 4/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation signal, disaster prevention, medical, public information network etc.. Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Important Notes

The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

Ak-Eyon Description 1638 Waldenburg mmany Serie 8050 - 2.50mm Screwless 1. +49 (0) 79 42 945 - 0 SMT - WR-TBL
IG38 Waldenburg Serie 8050 - 2.50mm Screwless J. +49 (0) 79 42 945 - 0 SMT - WR-TBL

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc... Wurth Elektronic exponention, unclear control, train control, ship control, train control control treal train c

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by Wurth manufacturer:

Other Similar products are found below :

 892-18-020-10-001101
 58102-G61-06LF
 582553-1
 0009485154
 009176003701906
 0050291907
 LY20-4P-DT1-P1E-BR
 02.125.8002.8

 609-3404
 61062-3
 61082-181009
 622-3653LF
 63453-116
 636-1030
 636-1427
 636-3427
 636-4007
 641938-9
 641991-4
 644827-2
 65817

 010LF
 65817-015LF
 65863-015LF
 66207-023LF
 67095-007LF
 67601157
 68645-018
 68648-049
 70.362.1628.0
 70-4226B
 70

 4853B
 707-5020
 707-5028
 71.350.2428.0
 71918-208LF
 71961-016LF
 733-134
 733-162
 754199-000
 760-3052
 79531-3000
 FCN

 360C032-B
 FCN-367T-T012/H
 FCN-723D010/2
 80.063.4001.1
 800-90-001-10-001000
 800-90-010-10-002000
 801-43-002-10-013000

 801-43-006-10-002000
 610-43-002-10-013000
 610-43-002-10-013000
 610-43-002-10-013000
 610-43-002-10-013000