
# Dimensions: [mm]

21,0 ±0,5

# **Recommended Land Pattern: [mm]**



Properties	Test conditions		Value	Unit	Tol.
Inductance	10 kHz/ 0.1 mA	L	2x10	mH	±30%
Rated Current	@ 70 °C	I <sub>R</sub>	3.4	А	min.
DC Resistance	@ 20 °C	R <sub>DC</sub>	2x110	mΩ	max.
Rated Voltage	50 Hz	U <sub>R</sub>	250	V (AC)	max.
Insulation Test Voltage	50 Hz	U <sub>T</sub>	1500	V (AC)	

•	
Gonoral	Information:
uciiciai	mormation.

		It is recommended that the temperature of the component does not exceed +125°C under worst case conditions									
			Storage Temperature (in original packaging)				-20 °C up to +60 °C				
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	!	Operating Temperature				-40 °C up to +125 °C					
	[	Moisture Sensitive Level			MSL	MSL 1					
	Į				Tempera	ture Rise < 55	iκ				
	[]	۲	lest condif	tions of Electr	rical Propertie:	3: +20°C, 33%	6 RH if not	t specified differe	ently		
Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions	CREATED KaS		CHECKED		eneral tolerance DIN ISO 2768-1m		PROJECTION METHOD		)-		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	1	FCL Coi Choke			'ower	ORDER CODE 74486	44866103		PAGE		
	ET35	001.0		status Valid		2018-04-09		eiSos	1/5		

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be performed on every electronic component which is used in electrical incurbic for severations reperformance.

4,0 ±0,5 Ø 1,2 ±0,1 max Marking 26 


15,0 ±0,5

45,0 max

4


37,0 max

Scale - 1:2

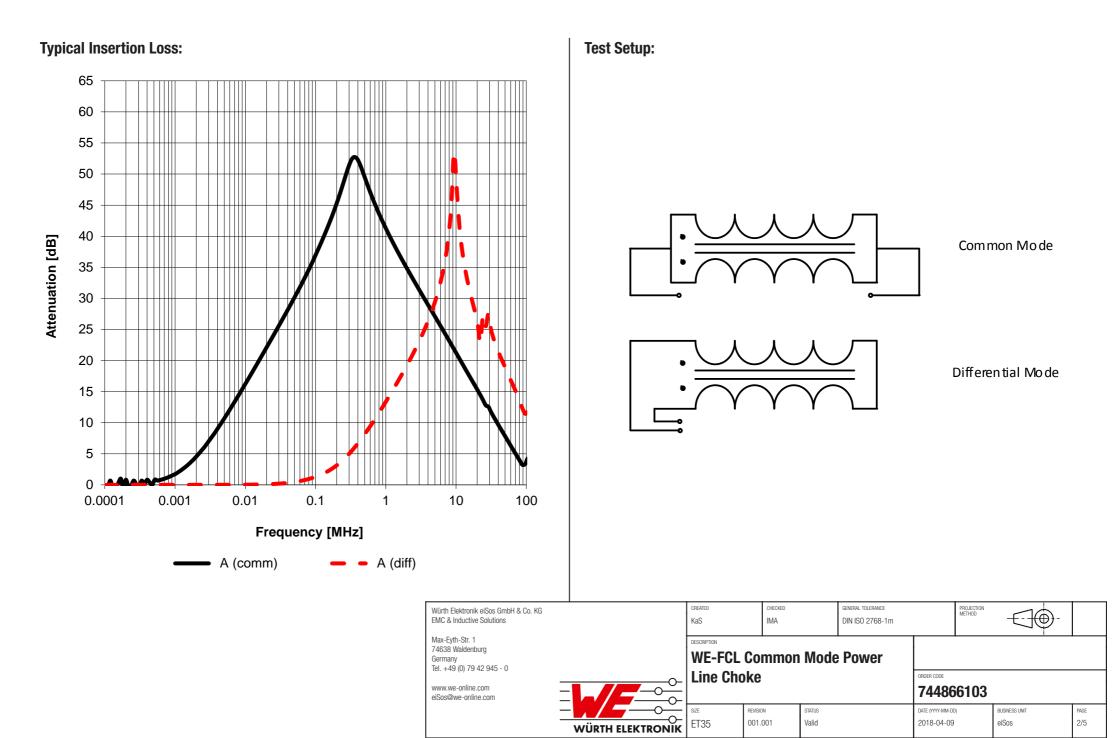

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG products are netliner designed on intended for use in equipment which is used in developed for usage before the design-in stage. In addition, nuclear control, train control, ship control, train sportation signal, disaster prevention, medical, public information network etc.. Worth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in developed relicital circuits that require high stafety and reliability inclusions or performance.


## **Classification Wave Soldering Profile:**

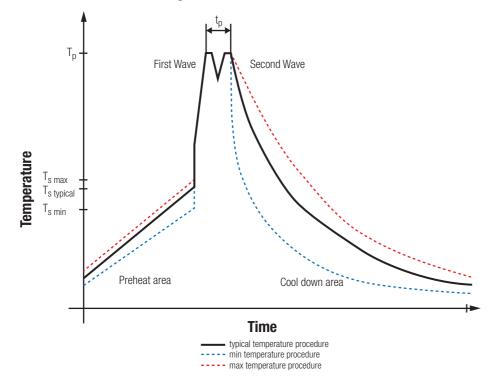

# **Classification Wave Soldering Profile:**

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	T <sub>s min</sub>	100 °C	100 °C
Preheat Temperature Typical	T <sub>s typical</sub>	120 °C	120 °C
Preheat Temperature Max	T <sub>s max</sub>	130 °C	130 °C
Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$	t <sub>s</sub>	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak temperature	Т <sub>р</sub>	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25°C to 25°C		4 minutes	4 minutes

refer to EN61760-1:2006

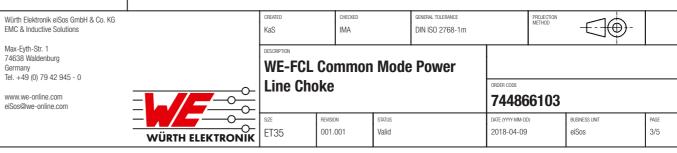

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co Kg products are netliner designed nor intended for use in equipment which is used in elevation intended for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, Moreover Warth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in elevatival crucial the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every elevationic component which is used in elevatival crucial that require high astel elevatival require high astel elevatival to cause elevatival elevatival that and the elevatival elev

## **Cautions and Warnings:**

### The following conditions apply to all goods within the product series of WE-FCL of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

All recommendations according to the general technical specifications of the data sheet have to be complied with.

The usage and operation of the product within ambient conditions, which probably alloy or harm the wire isolation, has to be avoided.

If the product is potted in customer applications, the potting material might shrink during and after hardening. The product is exposed to the pressure of the potting material with the effect that the core, wire and termination is possibly damaged by this pressure and so the electrical as well as the mechanical characteristics are endangered to be affected. After the potting material is cured, the core, wire and termination of the product have to be checked if any reduced electrical or mechanical functions or destructions have occurred.

The responsibility for the applicability of customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products do also apply to customer specific products.

Cleaning agents that are used to clean the customer application might damage or change the characteristics of the component, body, pins or termination.

Direct mechanical impact to the product shall be prevented as the ferrite material of the core could flake or in the worst case it could break.

#### Product specific:

Follow all instructions mentioned in the data sheet, especially:

- The soldering profile has to be complied with according to the technical wave soldering specification, otherwise this will void the warranty.
- Reflow soldering is only allowed after evaluation and approval
- All products shall be used before the end of the period of 12 months based on the product date code, if not a 100% solderability can't be ensured.
- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Due to heavy weight of the component, strong forces and high accelerations might have the effect to damage the electrical connection or to harm the circuit board and will void the warranty.

The general and prodcut specific cautions comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable; however, no responsibility is assumed for inaccuracies or incompleteness.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	created KaS	CHECKED		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	WE-FCL Common Mode Power							
www.we-online.com					ORDER CODE	6103		_
	<sup>size</sup> ET35	REVISION 001.001	status Valid		DATE (YYYY-MM-DD 2018-04-09	)	BUSINESS UNIT eiSos	PAGE 4/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Worth Elektronik elSos GmbH & Co KG product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, Moreover Worth Elektronik elSos GmbH & Co KG must be information intended for use in advantage, anaportation (automotive control, train control, ship control), train control, ship control, train control, ship control, train control, ship control, train control, tr

## **Important Notes**

#### The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further gueries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG. Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group". last version available at www.we-online.com.

Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED KaS	CHECKED		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		
Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0	WE-FCL Common Mode Power							
www.we-online.com	Line Cho		ORDER CODE	6103				
		REVISION 001.001	status Valid		DATE (YYYY-MM-DD 2018-04-09	))	BUSINESS UNIT eiSos	PAGE 5/5

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in anexas such as military, aerospace, avaiton, nuclear control, train control, ship control, train control, ship control, train control, tr

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Common Mode Chokes / Filters category:

Click to view products by Wurth manufacturer:

Other Similar products are found below :

 74279408
 PE-62911NL
 PE-64683
 ST6118T-R
 T8114NLT
 RD5122-10-6M0
 TCM0806G-350-2P-T
 TCM0806G-650-2P-T
 IND-0110

 UAL21V07012500
 UAL21VR0802000
 UAL24VR06500CH
 UALSC023000000
 UALSC1020JH000
 UALSC1520JH000

 UALSU16VD30030
 UALSU16VD40010
 UALSU9H0305000
 UALSU9HF060300
 UALSU9VD070100
 36-00037
 5701610000

 UALW21HS072450
 UALSU9VD070400
 UALSU9HF050500
 UALSU9H0208000
 UALSCF25081300
 UAL24VK06450CH

 PLT10HH501100PNB
 PLT10HH401100PNB
 PLT10HH1026R0PNB
 PE-67531
 EXC-X4CH120X
 TLH10UB
 113<0R5</td>
 2752041447

 2752045447
 CMS3-11-R
 7351V
 CMF16-153131
 744252510
 T8116NLT
 FE2X10-4-2NL
 744253200
 744253101
 744252220
 TX8111NLT

 UAL30VR3500470
 CTX01-19077-R
 T8003NLT
 CTX01-13663
 10000
 10000
 10000
 10000