
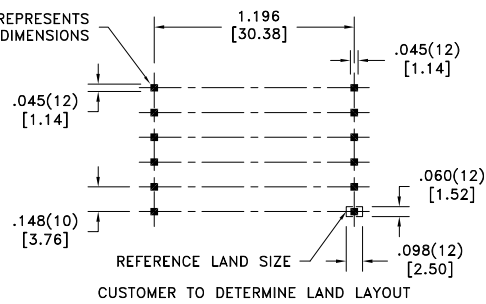
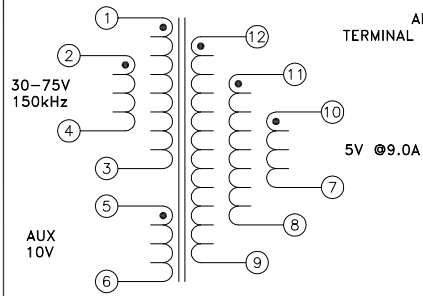


|                   |      |               |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4%       | Yes  | Yes           |

more than you expect

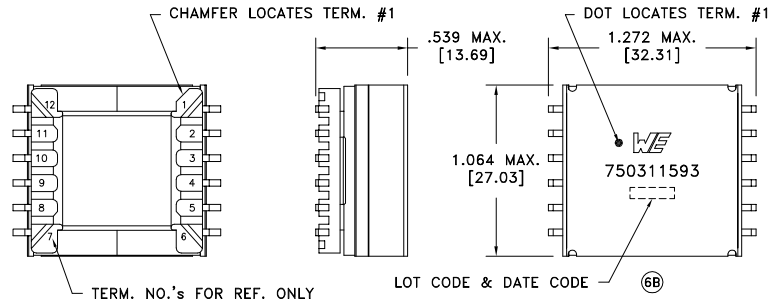

Customer tie terminals 1&2, 3&4, 7&8&9 and 10&11&12 on pcb for voltages shown. Transformer construction will allow alternate tie configuration to accommodate alternate voltage combinations.

(6B)

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER          | TEST CONDITIONS                                            | VALUE                  |
|--------------------|------------------------------------------------------------|------------------------|
| D.C. RESISTANCE    | 1-3 tie(1+2, 3+4), @20°C                                   | 0.032 ohms max.        |
| D.C. RESISTANCE    | 12-9 tie(12+11+10, 9+8+7), @20°C                           | 0.008 ohms max.        |
| D.C. RESISTANCE    | 5-6 @20°C                                                  | 0.038 ohms max.        |
| INDUCTANCE         | 1-3 150kHz, 100mVAC, Ls                                    | 15.00uH ±10%           |
| SATURATION CURRENT | 20% rolloff from initial                                   | 18A                    |
| LEAKAGE INDUCTANCE | 1-3 tie(1+2, 3+4, 5+6, 7+8+9+10+11+12), 100kHz, 50mVAC, Ls | 300nH typ., 400nH max. |
| DIELECTRIC         | 1-12 tie(1+2+5, 7+8+9), 1875VAC, 1 second                  | 1500VAC, 1 minute      |
| (6B) DIELECTRIC    | 10-11 tie(11+12), 625VAC, 1 second                         | 500VAC, 1 minute       |
| (6B) DIELECTRIC    | 11-12 625VAC, 1 second                                     | 500VAC, 1 minute       |
| (6B) DIELECTRIC    | 1-2 625VAC, 1 second                                       | 500VAC, 1 minute       |
| TURNS RATIO        | (1-3):(5-6)                                                | 1.75:1, ±1%            |
| TURNS RATIO        | (1-3):(12-9)                                               | 3.50:1, ±1%            |

GENERAL SPECIFICATIONS:

(6B) OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

|      |      |                                                                                                    |  |                                                                                                                              |                                     |                              |
|------|------|----------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|------------------------------|
| REV. | DATE | Packaging Specifications<br>Method: <b>Tape &amp; Reel</b><br>PKG-0605<br>www.we-online.com/midcom |  | Tolerances unless otherwise specified:<br>Angles: ±1°<br>Fractions: ±1/64<br>Decimals: ±.005 [.13]<br>Footprint: ±.005 [.13] | DRAWING TITLE<br><b>TRANSFORMER</b> | PART NO.<br><b>750311593</b> |
| 6B   | 5/14 |                                                                                                    |  | This drawing is dual dimensioned. Dimensions in brackets are in millimeters.                                                 | eiSos p/n: 750311593                |                              |
| 6A   | 8/10 | SEE REVISION SHEET FOR REVISION LEVEL                                                              |  |                                                                                                                              |                                     | SPECIFICATION SHEET 1 OF 1   |

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)