



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

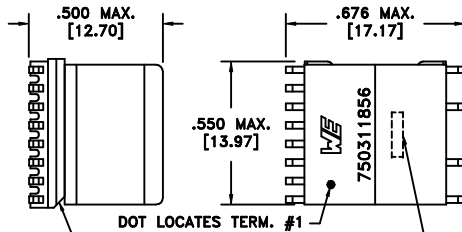


TERM. NO.'s FOR REF. ONLY




CHAMFERS LOCATE TERM.'s #1 & 16

DOT LOCATES TERM. #1

LOT CODE & DATE CODE

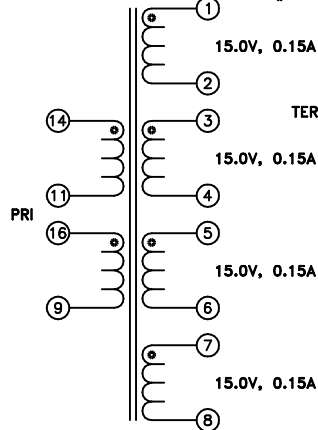

AREA REPRESENTS TERMINAL PAD DIMENSIONS

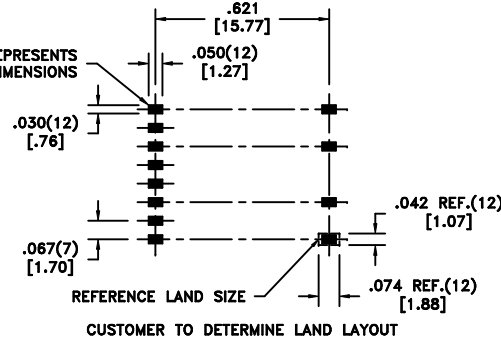

REFERENCE LAND SIZE CUSTOMER TO DETERMINE LAND LAYOUT

Connect PRI colls in parallel for 8-24V in operation.

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	16-9 tie(14+16, 9+11), @20°C	0.040 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	1.600 ohms ±10%
D.C. RESISTANCE	5-6 @20°C	1.600 ohms ±10%
D.C. RESISTANCE	1-2 @20°C	1.800 ohms ±10%
D.C. RESISTANCE	7-8 @20°C	1.800 ohms ±10%
INDUCTANCE	16-9 tie(14+16, 9+11), 100kHz, 100mVAC, Ls	3.80uH ±5%
SATURATION CURRENT	20% rolloff from initial	>12A
LEAKAGE INDUCTANCE	16-9 tie(14+16, 9+11, 1 thru 8), 100kHz, 50mVAC, Ls	250nH typ., 400nH max.
DIELECTRIC	1-16 1500VAC, 1 second	-
DIELECTRIC	1-3 tie(3+5+7), 1000VAC, 1 second	-
DIELECTRIC	3-5 tie(5+7), 1000VAC, 1 second	-
DIELECTRIC	5-7 1000VAC, 1 second	-
URNS RATIO	(1-2):(16-9)	4:1, ±1%
URNS RATIO	(3-4):(16-9)	4:1, ±1%
URNS RATIO	(5-6):(16-9)	4:1, ±1%
URNS RATIO	(7-8):(16-9)	4:1, ±1%
URNS RATIO	(14-11):(16-9)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0325 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750311856
6A	11/10	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311856	SPECIFICATION SHEET 1 OF 1



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)