

		RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



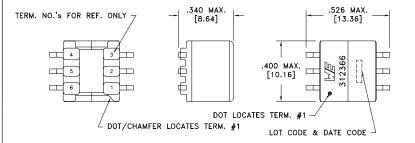

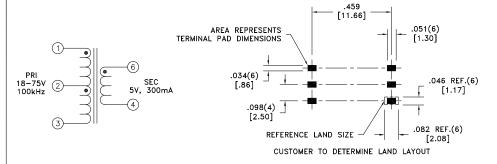

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3	@20°C	0.98 ohms ±10%
D.C. RESISTANCE	6-4	@20°C	0.055 ohms max.
INDUCTANCE	1-3	10kHz, 100mVAC, Ls	400uH ±10%
SATURATION CURRENT		20% rolloff from initial	580mA
LEAKAGE INDUCTANCE	1-3	tie(4+6), 100kHz, 100mVAC, Ls	4.0uH typ., 8.0uH max.
DIELECTRIC	1-6	1850VAC, 1 second	1500VAC, 1 minute
TURNS RATIO		(1-2):(2-3)	1:1, ±1%
TURNS RATIO		(1-3):(6-4)	7.111:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	4 1
		Method: Tape & Reel	
		PKG-0519	
6B	2/21	www.we-online.com/midcom	CONVENTION PLACEMENT
6A	01/12	SEE REVISION SHEET FOR	REVISION LEVEL

Angles: ±1'
Fractions: ±1/
This drawing is

Tolerances unless otherwise specified: Angles: $\pm 1^{\circ}$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .005$ [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: **750312366**

PART NO.

750312366

ROHS SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02