



|                   |      |               |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4%       | Yes  | Yes           |

more than you expect


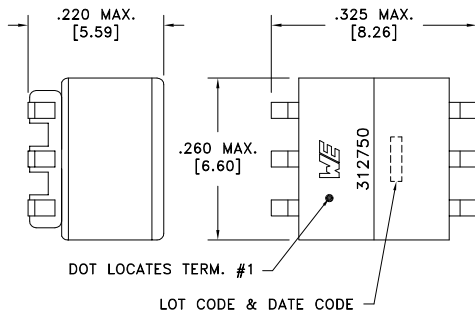


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

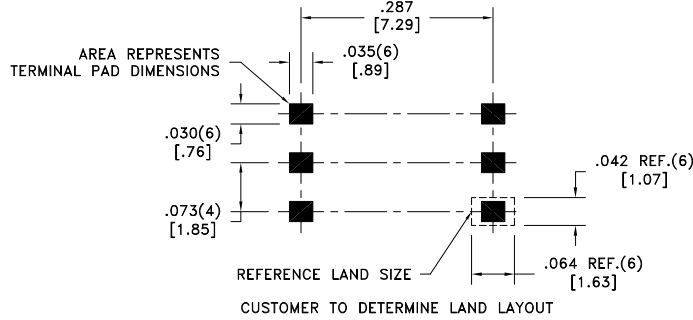

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER          | TEST CONDITIONS                   | VALUE                  |
|--------------------|-----------------------------------|------------------------|
| D.C. RESISTANCE    | 3-1 @20°C                         | 0.203 ohms ±10%        |
| D.C. RESISTANCE    | 4-6 @20°C                         | 0.212 ohms ±10%        |
| INDUCTANCE         | 3-1 100kHz, 100mVAC, Ls           | 23.0uH ±10%            |
| INDUCTANCE         | 4-6 100kHz, 100mVAC, Ls           | 23.0uH ±10%            |
| SATURATION CURRENT | 20% rolloff from initial          | 760mA                  |
| LEAKAGE INDUCTANCE | 3-1 tie(4+6), 100kHz, 100mVAC, Ls | 200nH typ., 400nH max. |
| DIELECTRIC         | 1-6 1500VAC, 1 second             | -                      |
| URNS RATIO         | (3-1):(4-6)                       | 1:1, ±1%               |

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

|      |      |  |  |  |                                     |                              |
|------|------|--|--|--|-------------------------------------|------------------------------|
| REV. | DATE | Packaging Specifications<br>Method: <b>Tape &amp; Reel</b><br>PKG-0637<br>www.we-online.com/midcom |  | Tolerances unless otherwise specified:<br>Angles: ±1°<br>Fractions: ±1/64<br>Decimals: ±.005 [.13]<br>Footprint: ±.005 [.13] | DRAWING TITLE<br><b>TRANSFORMER</b> | PART NO.<br><b>750312750</b> |
| 6A   | 4/13 | SEE REVISION SHEET FOR REVISION LEVEL  |  | This drawing is dual dimensioned. Dimensions in brackets are in millimeters.   | eiSos p/n: 750312750                | SPECIFICATION SHEET 1 OF 1   |

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)