



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


more than you expect

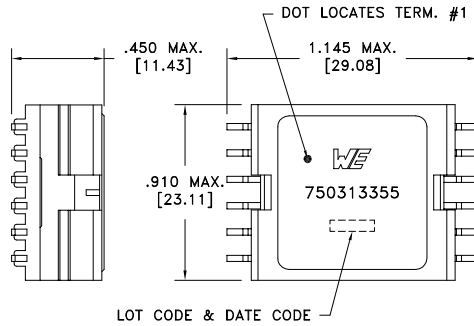

TERM. NO.'s FOR REF. ONLY




LOT CODE & DATE CODE

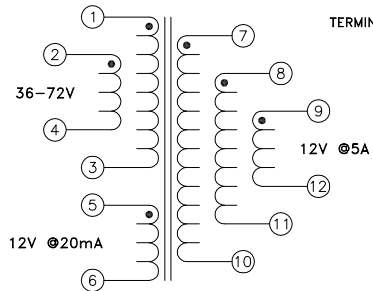

Application of the transformer allows for the leadwires between terminals 1&2, 3&4, 10&11&12 and 7&8&9 to solder bridge.

AREA REPRESENTS TERMINAL PAD DIMENSIONS

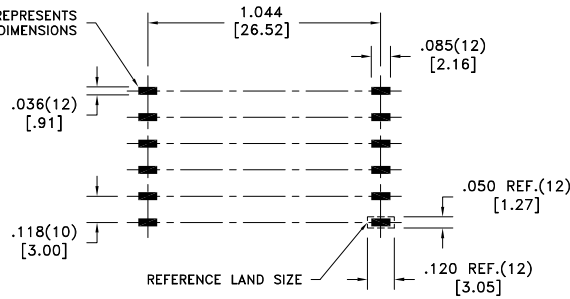

REFERENCE LAND SIZE CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 tie(1+2, 3+4), @20°C	0.065 ohms max.
D.C. RESISTANCE	7-12 tie(7+8+9, 10+11+12), @20°C	0.015 ohms max.
D.C. RESISTANCE	@20°C	0.260 ohms max.
INDUCTANCE	1-4 tie(1+2, 3+4), 100kHz, 100mVAC, Ls	100.0uH ±12%
LEAKAGE INDUCTANCE	1-4 tie(1+2, 3+4, 5+6+7+8+9+10+11+12), 100kHz, 10mVAC, Ls	850nH max.
DIELECTRIC	1-12 tie(1+2, 5+6+3, 10+11+12), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-3):(7-10), tie(1+2, 3+4)	2:1, ±1%
URNS RATIO	(1-3):(8-11), tie(1+2, 3+4)	2:1, ±1%
URNS RATIO	(1-3):(9-12), tie(1+2, 3+4)	2:1, ±1%
URNS RATIO	(1-3):(2-4)	1:1, ±1%
URNS RATIO	(1-3):(5-6), tie(1+2, 3+4)	2:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications
6C	10/18	Method: Tape & Reel PKG-0868 www.we-online.com/midcom
6B	2/15	
6A	2/14	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:  
Angles: ±1° Decimals: ±.005 [.13]  
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**

eiSos p/n: 750313355



PART NO.

**750313355**

SPECIFICATION SHEET 1 OF 1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)