

CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



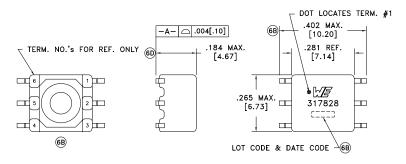

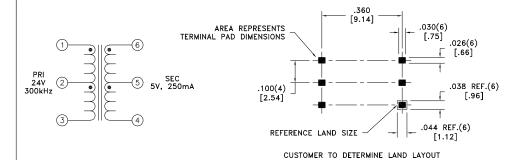

## ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE
	D.C. RESISTANCE	1-3	@20°C	1.30 ohms max.
	D.C. RESISTANCE	6-4	@20°C	0.230 ohms max.
<b>(6C)</b>	INDUCTANCE	1-2	10kHz, 100mVAC, Ls	1.0mH min.
	INDUCTANCE	2-3	10kHz, 100mVAC, Ls	1.0mH min.
	INTERWINDING CAPACITANCE	1-6	100kHz, 10mVAC, Cs	12.5pF typ.
	DIELECTRIC	1-6	3125VAC, 1 second	2500VAC, 1 minute
	TURNS RATIO		(1-3):(6-4)	4.43:1, ±2%

**GENERAL SPECIFICATIONS:** 

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

VOLTAGE-TIME: 44VuS

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Functional insulation for a secondary circuit at a working voltage of 400Vrms.

@ Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

	D, 11 L	
6D	12/21	Method: Tape & Reel
6C	4/21	PKG-0895
6B	12/20	www.we-online.com/midcom convention placement
6A	4/19	SEE REVISION SHEET FOR REVISION LEVEL

REV. DATE Packaging Specifications

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

eiSos p/n: 750317828

**TRANSFORMER** 

750317828

PART NO.

SPECIFICATION SHEET 1 OF 1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02