

CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%,	Ag4%	Yes	Yes



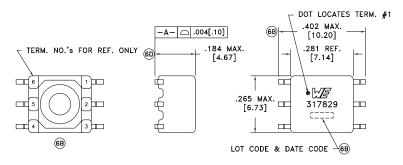

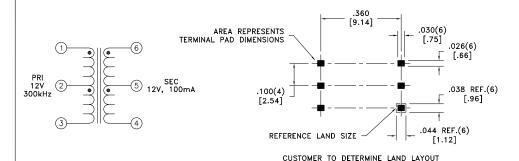

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	PARAMETER		TEST CONDITIONS	VALUE
	D.C. RESISTANCE	1-3	@20°C	0.920 ohms max.
	D.C. RESISTANCE	6-4	@20°C	0.870 ohms max.
6 C	INDUCTANCE	1-2	10kHz, 100mVAC, Ls	480uH min.
	INDUCTANCE	2-3	10kHz, 100mVAC, Ls	480uH min.
	INTERWINDING CAPACITANCE	1-6	100kHz, 10mVAC, Cs	22.5pF typ.
	DIELECTRIC	1-6	3125VAC, 1 second	2500VAC, 1 minute
	TURNS RATIO		(6-4):(1-3)	1.05:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C.

VOLTAGE-TIME: 24VuS

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Functional insulation for a secondary circuit at a working voltage of 400Vrms.

(6B) Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications
6D	12/21	Method: Tape & Reel
6C	4/21	PKG-0895
6B	12/20	www.we-online.com/midcom convention placement
6A	5/19	SEE REVISION SHEET FOR REVISION LEVEL

Tolerances unless otherwise specified: Angles: $\pm 1^{\circ}$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .005$ [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: **750317829**

PART NO.

750317829

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02