



CUSTOMER TERMINAL	ROHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

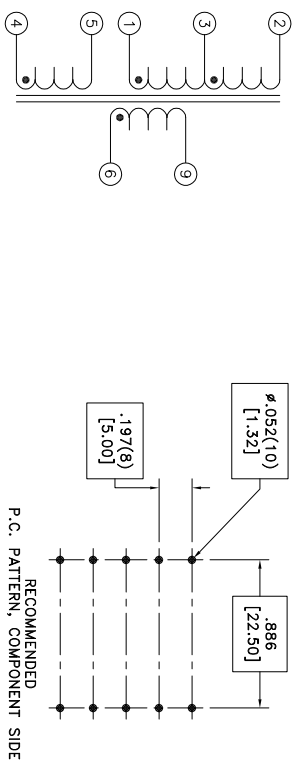

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.98 ohms max.
D.C. RESISTANCE	4-5 @20°C	1.20 ohms max.
D.C. RESISTANCE	6-9 @20°C	0.24 ohms max.
INDUCTANCE	1-2 10kHz, 200mVAC, 1s	1.08mH ±10%
INDUCTANCE	1-2 10kHz, 200mVAC, 1.6ADC, 1s	800µH min.
DIELECTRIC	1-9 tie(3+4),400VAC, 1 second	-
DIELECTRIC	1-5 1800VAC, 1 second	-
TURNS RATIO	(1-2):(4-5)	2.023:1, ±2%
TURNS RATIO	(1-2):(6-9)	4.047:1, ±2%

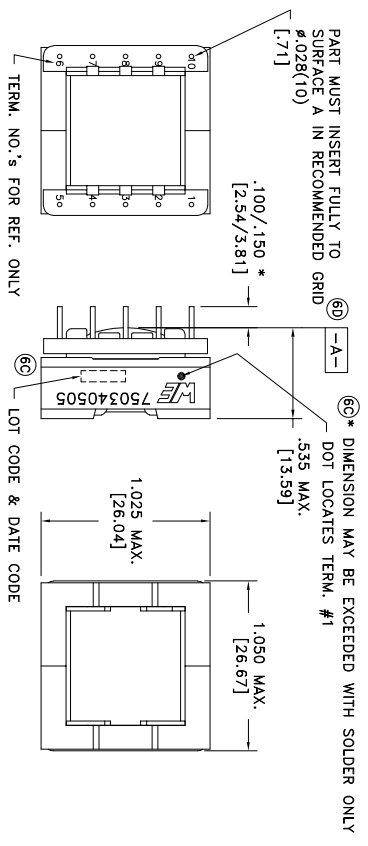

66 Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.003 Footprint: ±.001 Dimensions in brackets are in millimeters.	DRAWING TITLE	PART NO.
6D	5/19	Method: Tray PKG-0029			<b>TRANSFORMER</b>	<b>750340505</b>
6C	11/15	www.we-online.com/midcom				
6B	7/11					
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL				



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)  
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)  
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)