
CUSTOMER TERMINAL ROHS LEAD(Pb)-FREE
Sn96%, Ag4% Yes Yes





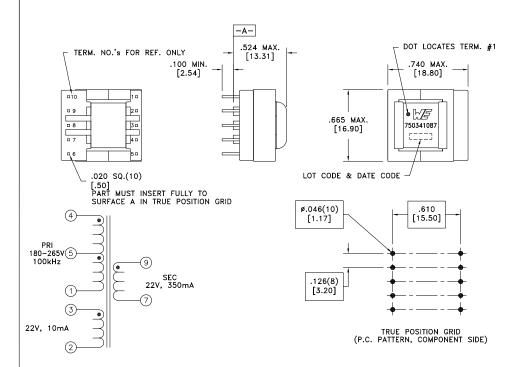

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	4-1	@20°C	6.500 ohms max.
D.C. RESISTANCE	3-2	@20°C	1.100 ohms max.
D.C. RESISTANCE	9-7	@20°C	0.185 ohms max.
INDUCTANCE	4-1	10kHz, 100mVAC, Ls	3.000mH ±10%
LEAKAGE INDUCTANCE	4-1	tie(2+3+7+9), 10kHz, 100mVAC, Ls	35.00uH max.
DIELECTRIC	1-9	tie(3+4+core), 4500VAC, 1 second	-
DIELECTRIC	1-2	625VAC, 1 second	_
TURNS RATIO		(4-1):(3-2)	7.615:1, ±1%
TURNS RATIO		(4-1):(9-7)	7.615:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC61558-2-17:

- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

	ì	
		Method: Tray
6C	9/12	PKG-0887 (6C)
6B	6/12	www.we-online.com/midcom convention placement
6A	1/12	SEE REVISION SHEET FOR REVISION LEVEL

REV. DATE Packaging Specifications

Tolerances unless otherwise specified:
Angles: $\pm 1^{\circ}$ Decimals: $\pm .005$ [.13]
Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: **750341087**

PART NO.

750341087

ROHS SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02