more		




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	TEST CONDITIONS	VALUE	
D.C. RESISTANCE 1-2		0.29 ohms max.	
3-4	@20°C	0.14 ohms max.	
D.C. RESISTANCE 5-8		0.22 ohms max.	
1-2	100kHz, 1.0VAC, Ls	65uH ±15%	
LEAKAGE INDUCTANCE 1-2		1.5uH max.	
1-5	tie(2+3), 1250VDC, 1 second	1000VDC, 1 minute	
	(1-2):(3-4)	2.75:1, ±2%	
	(1-2):(5-8)	2.75:1, ±2%	
	3-4 5-8 1-2 1-2	1-2 @20°C 3-4 @20°C 5-8 @20°C 1-2 100kHz, 1.0VAC, Ls 1-2 tie(3+4+5+8), 100kHz, 1.0VAC, Ls 1-5 tie(2+3), 1250VDC, 1 second (1-2):(3-4) (1-2):(3-4)	



OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

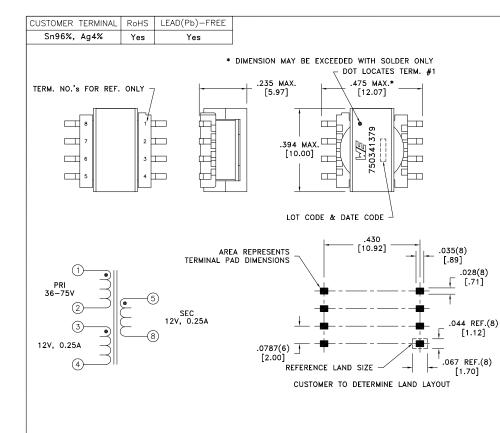

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	<i>+ -</i>	Tolerances unless ot		DRAWING TITLE		PART NO.
		Method: Tape & Reel		Angles: ±1°	Decimals: ±.005 [.13]	TRANSFORMER		
		PKG-0193	$\Psi \subseteq$	Fractions: ±1/64	Footprint: ±.005 [.13]			750341379
6B	9/12	www.we-online.com/midcom	CONVENTION PLACEMENT	This drawing is dual	dimensioned. Dimensions		Compliant	
6A	7/12	SEE REVISION SHEET FOR	REVISION LEVEL	in brackets a	re in millimeters.	eiSos p/n: 750341379	Rohs	SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wurth manufacturer:

Other Similar products are found below :

 742700
 74270062
 7446222002
 750314624
 750341638
 304055
 31402
 7446321027
 744732100
 744741471
 744772681
 744777

 890334025009
 178050601
 61308021121
 615008138221
 744999
 7446823003
 744028
 66201621822
 691301710003
 7446221012
 744720

 760390015
 760895431
 662006236022
 64900621822
 74436410330
 78438357100
 890334026014
 744839208072
 744762A/RFI
 7449984

 750310346
 861011384014
 750817018
 7449982
 3021717
 3020903
 885342
 2603019321001
 2606039021001

 2608019324001
 2607019213001
 2605039241001
 2605049281001
 2607029291011
 709620200
 709951000