


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect



\* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

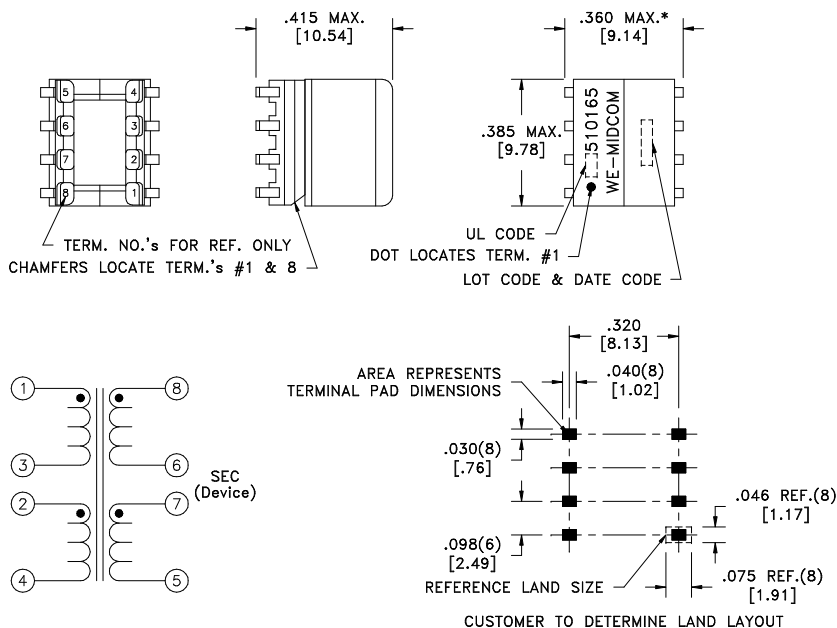

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.500 ohms max.
D.C. RESISTANCE	2-4 @20°C	0.500 ohms max.
D.C. RESISTANCE	8-6 @20°C	0.250 ohms max.
D.C. RESISTANCE	7-5 @20°C	0.250 ohms max.
INDUCTANCE	1-4 tie(2+3), 10kHz, 100mVAC, Ls	1.20mH ±10%
LEAKAGE INDUCTANCE	1-4 tie(2+3, 6+7, 5+8), 1MHz, 100mVAC, Ls	3uH max.
INTERWINDING CAPACITANCE	1-8 tie(2+3, 6+7), 100kHz, 100mVAC, Cs	60pF max.
DIELECTRIC	1-8 tie(2+3, 6+7), 1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO	(1-4):(8-5), tie(2+3, 6+7)	3:1, ±1.5%
TOTAL HARMONIC DISTORTION	40kHz, 2Vrms across PRI, 11 ohm load, 100 ohm input, tie(2+3, 6+7)	-80dB max.
LONGITUDINAL BALANCE <sup>1</sup>	20k - 2MHz	50dB min.

<sup>1</sup>Per ITU Method (L->M).

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:  
- Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

DETAILS SUBJECT TO CHANGE

AGENCY NUMBER

UL CODE  
FILE# E205930 BC

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-0410 www.midcom-inc.com	
6B	12/08		
6A	10/08	SEE REVISION SHEET FOR REVISION LEVEL	

Tolerances unless otherwise specified:  
Angles: ±1°      Decimals: ±.005 [.13]  
Fractions: ±1/64      Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**

eiSos p/n: 750510165



PART NO.

**750510165**

SPECIFICATION SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)  
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)  
[1879732-1](#)