

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.500 ohms max.
D.C. RESISTANCE	2-4 @20°C	0.500 ohms max.
D.C. RESISTANCE	8-6 @20°C	0.100 ohms max.
D.C. RESISTANCE	7-5 @20°C	0.100 ohms max.
INDUCTANCE	1-4 tie(2+3), 100kHz, 100mVAC, L <sub>s</sub>	150uH ±10%
LEAKAGE INDUCTANCE	1-4 tie(2+3, 5+6+7+8), 1MHz, 100mVAC, L <sub>s</sub>	0.9uH typ., 1.3uH max.
INTERWINDING CAPACITANCE	1-8 tie(1+2+3+4, 5+6+7+8), 25kHz, 100mVAC, C <sub>s</sub>	35pF max.
DIELECTRIC	1-8 tie(2+3, 6+7), 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-4):(8-5), tie(2+3, 6+7)	3.17:1, ±2%
URNS RATIO	(1-3):(8-6)	3.17:1, ±2%
TOTAL HARMONIC DISTORTION	100kHz, 3.5Vrms across PRI, 10 ohm load, 100 ohm input, tie(2+3, 6+7)	-75dB max.
LONGITUDINAL BALANCE <sup>1</sup>	20k-2MHz	40dB min.
INSERTION LOSS	1MHz, 10 ohm load	0.5dB max.

<sup>1</sup>Per ITU Method (L->M)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +85°C.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:  
 - Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

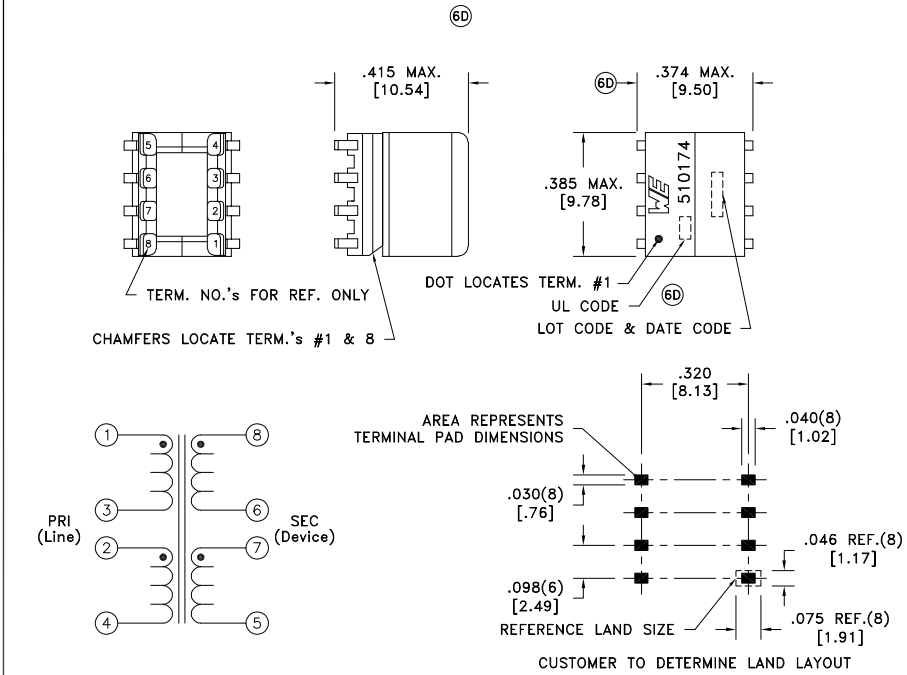

⑥D Wire insulation & RoHS status not affected by wire color.  
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

AGENCY NUMBER	
UL CODE FILE# E205930	BC

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.	
6D	6/19	Method: Tape & Reel		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	<b>TRANSFORMER</b>	<b>750510174</b>	
6C	1/10	PKG-0410					
6B	2/09	www.we-online.com/midcom					
6A	12/08	SEE REVISION SHEET FOR REVISION LEVEL					
				eiSos p/n: 750510174			SPECIFICATION SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:*

*Click to view products by [Würth](#) manufacturer:*

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5079NLT](#) [H5084FNLT](#)  
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)  
[1879732-1](#)