
CUSTOMER TERMINAL ROHS LEAD(Pb)-FREE
Sn96%, Ag4% Yes Yes



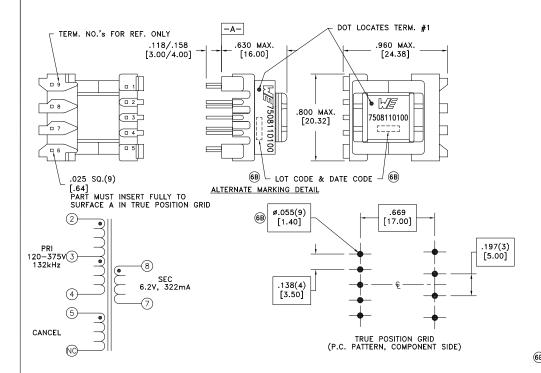

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-3	@20°C	2.15 ohms ±10%
D.C. RESISTANCE	3-4	@20°C	2.85 ohms ±10%
D.C. RESISTANCE	7-8	@20°C	0.040 ohms ±20%
INDUCTANCE	2-4	10kHz, 100mVAC, Ls	2.64mH ±10%
SATURATION CURRENT		20% rolloff from initial	350mA
LEAKAGE INDUCTANCE	2-4	tie(7+8), 100kHz, 100mVAC, Ls	30uH typ., 50uH max.
DIELECTRIC RAIING	3-8	4500VAC, 1 second	4500VAC, 1 minute
DIELECTRIC RATING	5-8	4500VAC, 1 second	4500VAC, 1 minute
DIELECTRIC RATING	3-5	625VAC, 1 second	500VAC, 1 minute
TURNS RATIO		(3-4):(2-3)	1:1, ±1%
TURNS RATIO		(2-4):(8-7)	11.07:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

©B Designed to comply with the following requirements as defined by IEC61558-2-16:

- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

REV.	DATE	Packaging Specifications
		Method: Tray
6C	2/15	FKG-0/33
6B	6/13	www.we-online.com/midcom
64	3/09	SEE REVISION SHEET FOR REVISION LEVEL

Tolerances unless otherwise specified: Angles: $\pm 1^{\circ}$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .005$ [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: **7508110100**

PART NO.

7508110100

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02