
Sn96%,		Yes	, ,
CUSTOMER	TERMINAL	RoHS	LEAD(Pb)-FREE



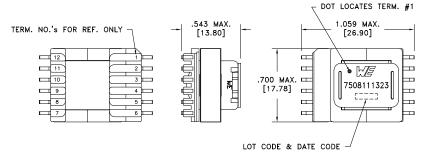

.973 [24.72] AREA REPRESENTS TERMINAL PAD DIMENSIONS .048(12) [1.22] 120-375V .037(12) 50-102kHz [.94] SEC 12V, 1.0A .046 REF.(12) [1.17] AUX .100(10) [2.54] .083 REF.(12) REFERENCE LAND SIZE [2.10] Customer to tie terminals 1&3 and 4&6 internally on PC Board. CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

	TEST CONDITIONS	VALUE
9-7	@20°C	2.08 ohms ±10%
12-11	@20°C	0.364 ohms ±10%
1-4	tie(1+3, 4+6), @20°C	0.081 ohms ±10%
9-7	10kHz, 100mVAC, Ls	2.00mH ±10%
	20% rolloff from initial	500mA
9-7	tie(1+3+4+6, 11+12), 100kHz, 100mVAC, Ls	50.0uH typ., 100.0uH max.
9-11	625VAC, 1 second	_
7-6	tie(9+11, 1+3), 4000VAC, 1 second	4000VAC, 1 minute
	(9-7):(12-11)	8:1, ±1%
	(9-7):(1-4), tie(1+3, 4+6)	8:1, ±1%
	12-11 1-4 9-7 9-7 9-11	9-7

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC61558-2-16: - Reinforced insulation for a primary circuit at a working voltage of 250Vrms.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	+ 1
		Method: Tape & Reel	
		PKG-0799	
6B	1/18	www.we-online.com/midcom	CONVENTION PLACEMENT
6A	8/15	SEE REVISION SHEET FOR	REVISION LEVEL

ACEMENT

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.005 [.13] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: 7508111323

PART NO.

7508111323

SPECIFICATION SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02