

CUSTOMER TERMINAL RoHS LEAD(Pb)-FREE Sn96%, Ag4% Yes Yes



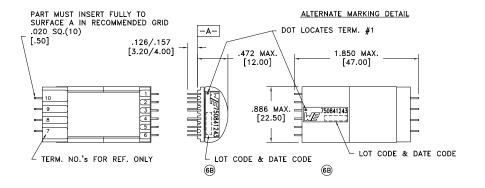

## PARAMETER TEST CONDITIONS VALUE D.C. RESISTANCE 1 - 3@20°C 0.30 ohms max. D.C. RESISTANCE 8-9 @20°C 0.09 ohms max. D.C. RESISTANCE 6 - 5@20°C 0.85 ohms max. INDUCTANCE 1 - 310kHz, 0.1VAC, Ls 270uH ±10% DIELECTRIC 1-9 tie(3+5), 3750VAC, 1 second 3000VAC, 1 minute TURNS RATIO (1-3):(6-5) $3.82:1. \pm 3\%$ TURNS RATIO (1-3):(8-9)1.91:1, ±3%

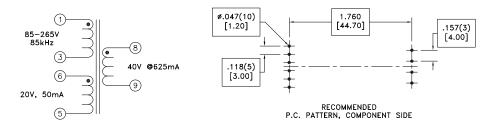

**GENERAL SPECIFICATIONS:** 

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications
		Method: Tray
		FKG-0829
6B	7/15	www.we-online.com/midcom
6.4	8/11	SEE REVISION SHEET FOR REVISION LEVEL

Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Footprint: ±.001 [.03] Fractions: ±1/64

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER** 

PART NO.

750841243

eiSos p/n: **750841243** 

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02