Nidcom






PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-1	@20°C	4.60 ohms max.
D.C. RESISTANCE	3-4	@20°C	0.690 ohms max.
D.C. RESISTANCE	6-8	@20°C	0.145 ohms max.
INDUCTANCE	2-1	10kHz, 100mVAC, Ls	2.0mH ±10%
SATURATION CURRENT		20% rolloff from initial	360mADC
LEAKAGE INDUCTANCE	2-1	tie(6+8), 10kHz, 100mVAC, Ls	60uH typ., 90uH max.
DIELECTRIC	2-6	tie(1+3), 4500VAC, 1 second	4500VAC, 1 minute
TURNS RATIO		(2-1):(3-4)	6.4:1, ±3%
TURNS RATIO		(2-1):(6-8)	8:1. ±3%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to $+125^{\circ}\text{C}$ including temp rise.

Designed to comply with the following requirements as defined by IEC61558-2-17: - Reinforced insulation for a primary circuit at a working voltage of 400VDC.

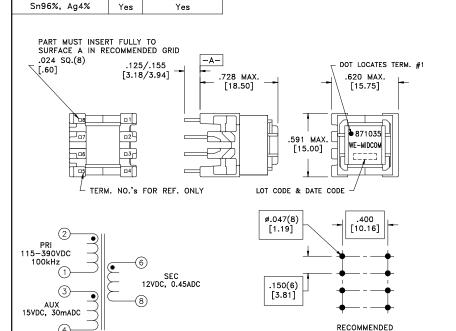

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications
		Method: Tray 6B
		PKG-0732
6B	12/10	www.we-online.com/midcom CONVENTION PLACEMENT
6A	2/10	SEE REVISION SHEET FOR REVISION LEVEL

CUSTOMER TERMINAL

RoHS

LEAD(Pb)-FREE

Tolerances unless otherwise specified: Decimals: ±.005 [.13] Footprint: ±.001 [.03] Angles: ±1° Fractions: ±1/64

P.C. PATTERN, COMPONENT SIDE

This drawing is dual dimensioned. in brackets are in millimeters. DRAWING TITLE

eiSos p/n: **750871035**

TRANSFORMER

PART NO.

750871035



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Transformers category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

ET-030A F-102X F-120X F-14X-1 F-181U F-18A F-199U F-19X F-202U F-204U F-206U F-227X F-238U F-239U-1 F-23U F24-250-B
F-242U F-245U F-264U F-265U F-267U F-281U F-283U F-290X F-295Z F-296Z F-298Z F-3143P F-3298Z F-33U F-346X F-35U F364U F-392A F-395X F-397U F-412X F-47U F-55X-1 F-60U F-68U F-71U F-72Z F-74U F-83A F-84AC F-85U F-86U F-9U PCT-02