



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

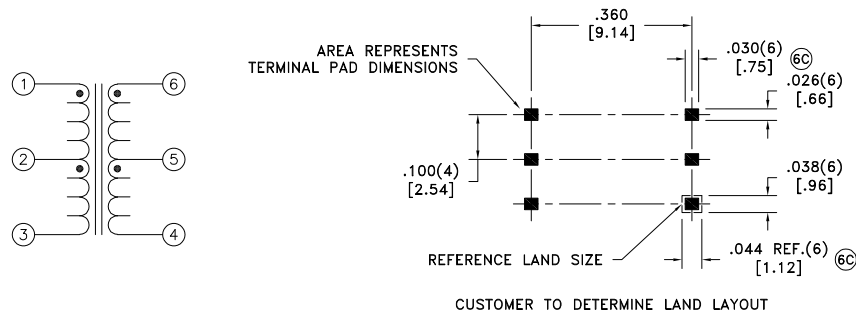

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6B D.C. RESISTANCE	1-3 @20°C	0.46 ohms max.
6B D.C. RESISTANCE	6-4 @20°C	0.48 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	1.0mH min.
6G INTERWINDING CAPACITANCE	1-6 100kHz, 10mVAC, Cs	12.5pF typ.
DIELECTRIC	1-6 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(6-4):(1-3)	1.1:1, ±2%

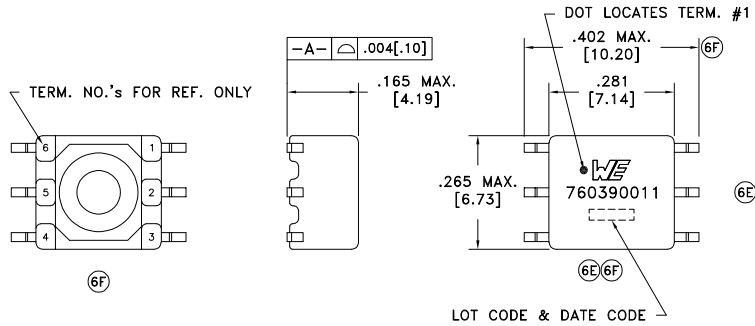

GENERAL SPECIFICATIONS:

- 6B OPERATING TEMPERATURE RANGE: -40°C to +125°C.
- CURRENT RATING: 100mAAC
- VOLTAGE-TIME: 7VuS
- 6D Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6G	4/21	Method: Tape & Reel		Angles: ±1°	TRANSFORMER	760390011
6F	12/20	PKG-0895		Decimals: ±.005 [.13]		
6E	7/16	www.we-online.com/midcom		Fractions: ±1/64	Footprint: ±.005 [.13]	
6D	3/16	SEE REVISION SHEET FOR REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		eiSos p/n: 760390011	SPECIFICATION SHEET 1 OF 1



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Würth](#) manufacturer:

Other Similar products are found below :

[ET-030A](#) [F-102X](#) [F-120X](#) [F-14X-1](#) [F-181U](#) [F-18A](#) [F-199U](#) [F-19X](#) [F-202U](#) [F-204U](#) [F-206U](#) [F-227X](#) [F-238U](#) [F-239U-1](#) [F-23U](#) [F24-250-B](#)
[F-242U](#) [F-245U](#) [F-264U](#) [F-265U](#) [F-267U](#) [F-281U](#) [F-283U](#) [F-290X](#) [F-295Z](#) [F-296Z](#) [F-298Z](#) [F-3143P](#) [F-3298Z](#) [F-33U](#) [F-346X](#) [F-35U](#) [F-](#)
[364U](#) [F-392A](#) [F-395X](#) [F-397U](#) [F-412X](#) [F-47U](#) [F-55X-1](#) [F-60U](#) [F-68U](#) [F-71U](#) [F-72Z](#) [F-74U](#) [F-83A](#) [F-84AC](#) [F-85U](#) [F-86U](#) [F-9U](#) [PCT-02](#)