Specification for release

Customer:


Ordercode: **8231614A**

Description : ESD Suppressor WE-VE femtoF






A Dimensions:



	Size 0603	
А	1.6 ± 0.2	mm
В	0.8 ± 0.2	mm
С	0.9 max	mm
D	0.3 ± 0.2	mm

B Electrical properties:

B Electrical properties.						
Properties	Test Conditions		Value	Unit	Tol.	
DC operating voltage		V_{DC}	14	V	max	
capacitance	1 MHz	C_{typ}	0.05	pF	typ	
capacitance	1 MHz	C_{max}	0.15	pF	max	
leakage current	12 VDC	I _{L max}	0.05	μΑ	max	
trigger voltage	TLP measurement	V _{Tr}	275	V	typ	
clamping voltage	8kV Contact, 30ns	V _{Cl}	45	V	typ	
ESD withstand	8kV Contact		1000		min	

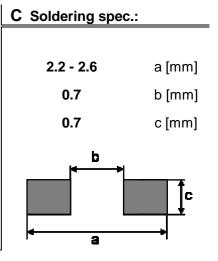

D Test equipm	ent:		E Test conditions:	
Keithley 2410 for le	eakage Current		Humidity:	33%
Agilent 4396B Ana	lyzer for Capacitance		Temperature:	+20℃
F Material & ap	oprovals:		G General specifications:	
Base material: Ceramic		Storage temperature:	-20℃ +60℃	
			Max. operating temperature:	-40℃ +85℃

General Release:	Customer			
General Nelease.				
Date	Signature			
	Würth Elektronik			
		JB	Version 1	2010-12-14
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

 $D\text{-}74638 \ \text{Waldenburg} \cdot \text{Max-Eyth-Strasse} \ 1 \cdot \text{Germany} \cdot \text{Phone} \ (\text{+}49) \ (0) \ 7942 - 945 - 0 \cdot \text{Fax} \ (\text{+}49) \ (0) \ 7942 - 945 - 400 \\ \text{http://www.we-online.com}$

Specification for release

Customer:


Ordercode: **8231614A**


Description: ESD Suppressor WE-VE femtoF





H Typical Characteristics:

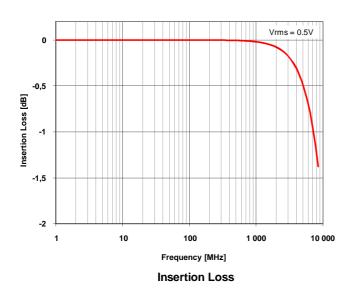

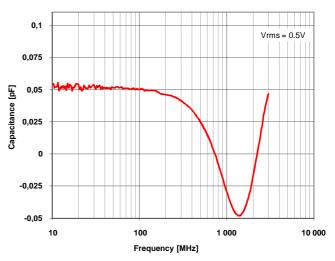

Capacitance vs. Frequency

General Release:	Customer			
General Release.				
Date	Signature			
	Würth Elektronik			
		. JB	Version 1	2010-12-14
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

D-74638 Waldenburg · Max-Eyth-Strasse 1 · Germany · Phone (+49) (0) 7942 - 945 - 0 · Fax (+49) (0) 7942 - 945 - 400 http://www.we-online.com

Specification for release

Customer: Ordercode:

8231614A


Description: ESD Suppressor WE-VE femtoF

8231614A






I Tape:

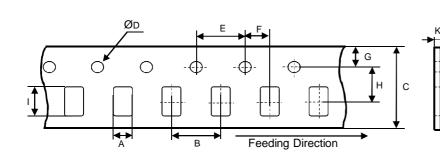


Α	1.10 typ	mm
В	4.00 ± 0.10	mm
С	8.0 +0.3/-0.1	mm
D	1.50 + 0.20	mm
Е	4.00 ± 0.10	mm
F	2.00 ± 0.10	mm
G	1.75 ± 0.10	mm
Η	3.50 ± 0.05	mm
I	1.88 typ	mm
J	1.10 max	mm

J Reel:

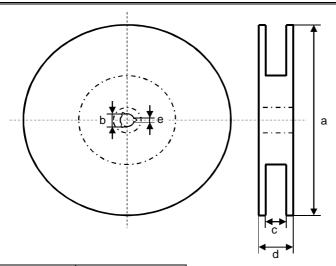

а	178.0 ± 2.0	mm
b	13.0 ± 0.8	mm
С	7.9 min	mm
d	14.4 max	mm
е	1.5 min	mm



Quantity per Reel:	5000 pcs
--------------------	----------

General Release:	Customer			
General Release.				
Date	Signature			
	Würth Elektronik			
		. JB	Version 1	2010-12-14
Checked	Approved	Name	Modification	Date

This electronic component has been designed and developed for usage in general electronic equipment. Before incorporating this component into any equipment where higher safety and reliability is especially required or if there is the possibility of direct damage or injury to human body, for example in the range of aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc, Würth Elektronik eiSos GmbH must be informed before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.

Würth Elektronik eiSos GmbH & Co. KG

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Wurth manufacturer:

Other Similar products are found below:

60KS200C D12V0H1U2WS-7 D18V0L1B2LP-7B 82356050220 D5V0M5U6V-7 NTE4902 P4KE27CA P6KE11CA P6KE39CA-TP
P6KE8.2A SA110CA SA60CA SA64CA SMBJ12CATR SMBJ8.0A SMLJ30CA-TP ESD101-B1-02ELS E6327 ESD112-B1-02EL E6327
ESD119B1W01005E6327XTSA1 ESD5V0L1B02VH6327XTSA1 ESD7451N2T5G 19180-510 CPDT-5V0USP-HF 3.0SMCJ33CA-F
3.0SMCJ36A-F HSPC16701B02TP D3V3Q1B2DLP3-7 D55V0M1B2WS-7 DESD5V0U1BL-7B DRTR5V0U4SL-7 SCM1293A-04SO
ESD200-B1-CSP0201 E6327 ESD203-B1-02EL E6327 SM12-7 SMF8.0A-TP SMLJ45CA-TP CEN955 W/DATA 82350120560
82356240030 VESD12A1A-HD1-GS08 CPDUR5V0R-HF CPDUR24V-HF CPDQC5V0U-HF CPDQC5V0USP-HF CPDQC5V0-HF
D1213A-01LP4-7B D1213A-02WL-7 ESDLIN1524BJ-HQ 5KP100A 5KP15A