# **Dimensions:** [mm]


1,6 ±0,15

0,3 ±0,2

Ć,

0,8

# **Recommended Land Pattern: [mm]**



Scale - 20:1

Schematic:

# V

## **Electrical Properties:**

Properties		Test conditions	Value	Unit	Tol.
AC Operating Voltage	V <sub>RMS</sub>		2.5	V	max.
DC Operating Voltage	V <sub>DC</sub>		3.3	V	max.
Clamping Voltage	V <sub>Clamp</sub>	1.0 A @ 8/20 µs	13	V	max.
(Reverse) Peak Pulse Current	I <sub>Peak</sub>	8/20 µs	30	А	max.
Energy Absorption	W <sub>max</sub>	10/1000 µs	0.1	J	max.
(Reverse) Breakdown Voltage	V <sub>BR</sub>	1 mA	5.5	V	±25%
(Channel) Input Capacitance	C <sub>Ch</sub>	1000 kHz	180	рF	typ.
		-			

## **Certification:**

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]
Halogen Free	Conform [IEC 61249-2-21]

## **General Properties:**

CHECKED

BeBo

DESCRIPTION

REVISION

002.000

**WE-VS SMT Varistor** 

DATE (YYYY-MM-DD)

2020-02-27

It is recommended that the temperature of the component does not exceed +85°C under worst case conditions								
Operating Temperature -40 up to +85 °C								
Storage Conditions (in original packaging)	< 40 °C;< 75 % RH							
Moisture Sensitivity Level (MSL)	1							

GENERAL TOLERANCE

DIN ISO 2768-1m

PROJECTION METHOD

ORDER CODE

STATUS

Expired

82536259

 $\overline{(1)}$ 

PAGE

1/6

Scale - 20:1

3

RoHS

Q

REACH

±0,1

0,8


WURTH ELEKTRONIK EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany Tel. +49 (0) 79 42 945 - 0 MORE THAN SIZE/TYPE BUSINESS UNIT YOU EXPECT www.we-online.com 0603 eiSos eiSos@we-online.com

⊘

HALOGEN

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wirth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in therefore a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, before the design-in stage, in addition, sufficient reliability transportation isgnal, disaster prevention, medical, public information network etc.. Wirth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require high safety and reliability for the safety and reliability for the reliability for the safety and reliability for the

Würth Elektronik eiSos GmbH & Co. KG

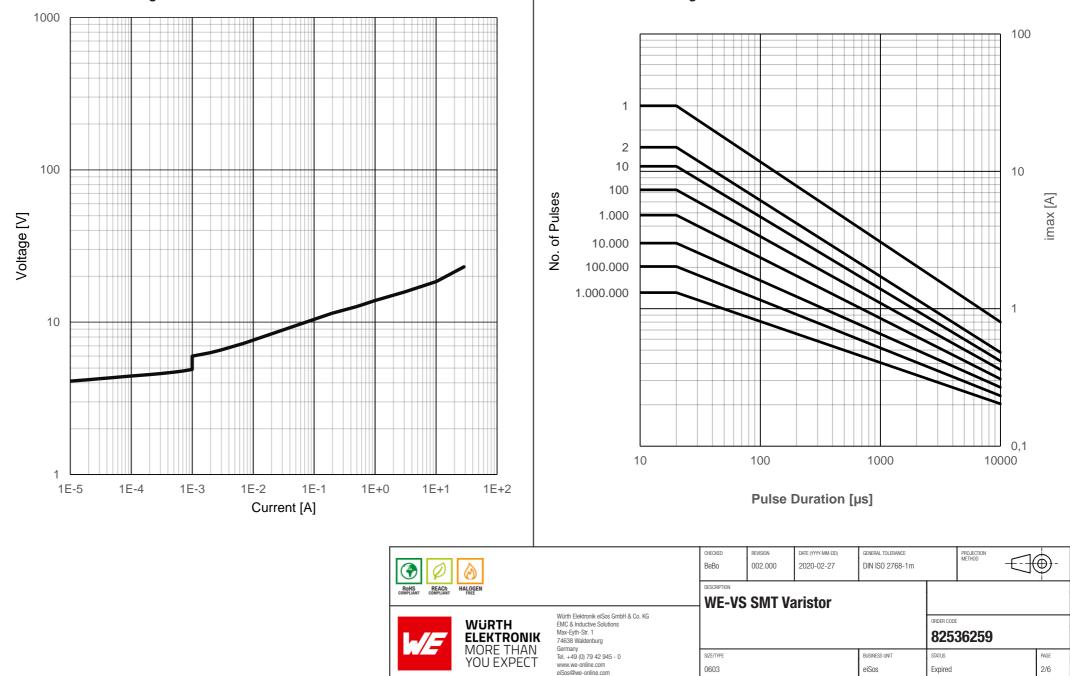


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuit later quire high safety and reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits are reliability for the electrical set and the electrical set are reliability for th

## **Rated Current vs. Voltage:**

Pulse Lifetime Derating:

Packaging Specification - Tape and Reel: [mm]

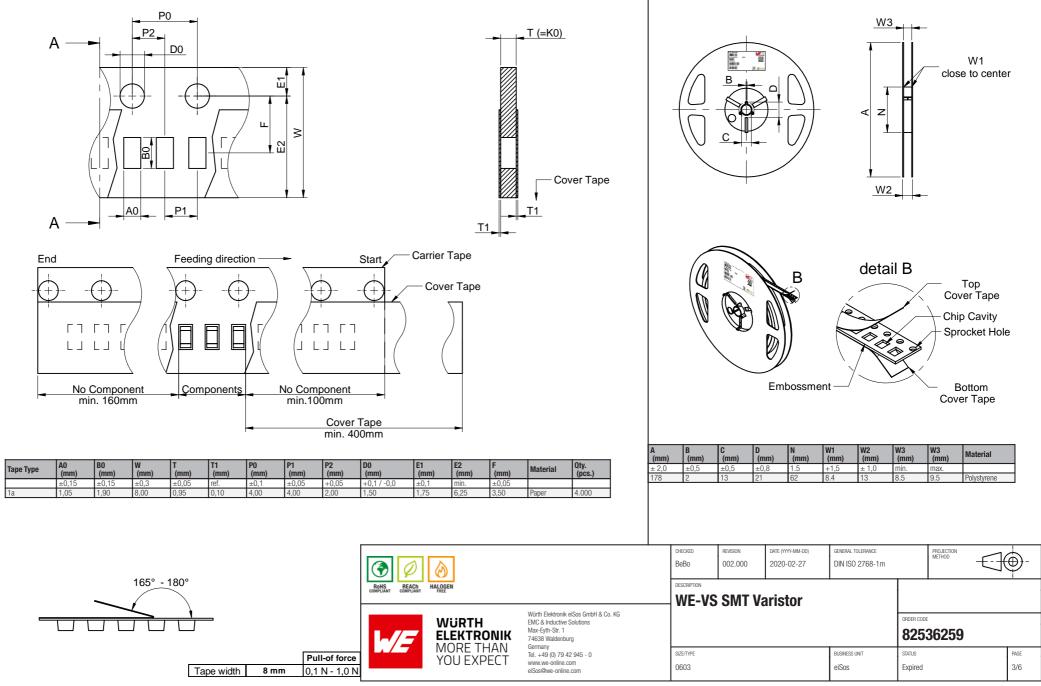

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be profromed on every electronic component which is used in electrical incurves the relative information. Control with a require ling is addition of performance.

# **Classification Reflow Profile for SMT components:**



# Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min	T <sub>s min</sub>	150 °C
Preheat Temperature Max	T <sub>s max</sub>	200 °C
Preheat Time $\rm t_s$ from $\rm T_{s\ min}$ to $\rm T_{s\ max}$	t <sub>s</sub>	60 - 120 seconds
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time $t_L$ maintained above $T_L$	tL	60 - 150 seconds
Peak package body temperature	Т <sub>р</sub>	$T_p \le T_c$ , see Table below
Time within 5°C of actual peak temperature	t <sub>p</sub>	20 - 30 seconds
Ramp-down Rate (T <sub>P</sub> to T <sub>L</sub> )		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

refer to IPC/ JEDEC J-STD-020E

# Package Classification Reflow Temperature (T<sub>c</sub>):

Properties	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000	
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C	
PB-Free Assembly   Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C	
PB-Free Assembly I Package Thickness > 2.5 mm	250 °C	245 °C	245 °C	

refer to IPC/ JEDEC J-STD-020E

RCHS REACA COMPLIANT COMPLIANT HALOGEN		CHECKED BeBo	REVISION 002.000	DATE (YYYY-MM-DD) 2020-02-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	<b>_</b> -	
		WE-VS SMT Varistor							
	TRONIK	Würth Elektronik alSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany					ORDER CODE	36259	
MORE THAN YOU EXPECT		einnany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE 0603			BUSINESS UNIT eiSos	status Expired		PAGE 4/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized tor use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability valuation checks for safety must be performed on every electronic component which is used in electrical incurbic for severamce.

# **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-VS of Würth Elektronik eiSos GmbH & Co. KG:

#### General:

- This electronic component is designed and manufactured for use in general electronic equipment
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The responsibility for the applicability of the customer specific products and use in a particular customer design is always within the authority of the customer. All technical specifications for standard products also apply to customer specific products.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.

#### **Cleaning and Washing:**

 Washing agents used during the production to clean the customer application might damage or change the characteristics of the coating insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

#### Potting:

If the product is potted in the customer application, the potting material might shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the component body, pins or termination. Expansion could damage the
components. We recommend a manual inspection after potting to avoid these effects

#### **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging:

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- Violation of the technical product specifications such as exceeding the nominal rated voltage will void the warranty.
- The varistor is not designed for voltage stabilization with continuous power dissipation.
- The exposure of steam, saline spray, atmosphere with reduced oxygen content, corrosive gases, rain or condensation and direct sunlight shall be prohibited.
- Signals operated continuously with a high ratio of direct-current voltage might have an influence on the product lifetime.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

Retts recent of the second of		CHECKED BeBo	REVISION 002.000	DATE (YYYY-MM-DD) 2020-02-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD	$- \bigcirc ($	€-	
		WE-VS SMT Varistor								
-//5		Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany					ORDER CODE	36259		
	MORE THAN YOU EXPECT	eleninary Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE 0603			BUSINESS UNIT eiSos	status Expired		1	PAGE 5/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik eSos GmbH & Co KG must be information network etc... Wurth Elektronik eSos GmbH & Co KG must be information network etc... Wurth Elektronic component which is used in editability functions or performance.

# **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### 1. General Customer Responsibility

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

		CHECKED BeBo	REVISION 002.000	DATE (YYYY-MM-DD) 2020-02-27	general tolerance DIN ISO 2768-1m		PROJECTION METHOD		₽-		
	ROHS REACH HALOGEN		WE-VS SMT Varistor								
	L//=		Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany					ORDER CODE	36259		
		MORE THAN YOU EXPECT	einnany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE 0603			BUSINESS UNIT eiSos	status Expired		1	page 6/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG products are neither designed on rinended for use in areas such as military, aerospace, availation, nuclear control, train control, ship control, train control, ship control, train control, t

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Varistors category:

Click to view products by Wurth manufacturer:

Other Similar products are found below :

 820443211E
 MLV0603E30403T
 MOV05131AIA
 MOV07231AQA
 MOV18131CZA
 R71ZOV151HC
 D58ZOV500RA01T1

 B72214S110K151
 B72214S251K151
 B72260B102K1
 B72280B271K1
 B72500E8250L60
 B72530E1140S272
 B72540E250K62

 B72650M0151K093
 B72660M0271K093
 NTE1V020
 NTE1V130
 NTE2V010
 NTE2V130
 ROV20-220M-S
 ROV20H201K
 25FN511K

 S10K11G5S5
 ERZ-C07DK221U
 ERZ-C14DK361U
 ERZ-C20DK221U
 207869-1
 TMOV25SP625E
 TND10V-471KB00AAA0

 B72210S271K111
 B72214S200K551
 B72280B112K1
 B72280B381K1
 B72540E 350K 62
 B72590D360A60
 B72650M301K93

 B72670M1140K72
 MOV07251ARA
 MOV10131EDA
 MOV10151EFA
 MOV14151CWA
 MOV20251DFA
 TVZ18EC271KBS

 TVZ20EB911KBS
 TVZ25D201KBS
 TVZ25D241KBS
 VZ07D220KBS
 Z420LA20A
 ROV20H220M-S