

General Description

The 74HC/HCT153 is a dual 4-input multiplexer. The device features independent enable inputs ($n\bar{E}$) and common data select inputs (S0 and S1). For each multiplexer, the select inputs select one of the four binary inputs and routes it to the multiplexer output (nY). A HIGH on \bar{E} forces the corresponding multiplexer outputs LOW. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC}.

Features

- Input levels:
 - For 74HC153: CMOS level
 - For 74HCT153: TTL level
- Non-inverting outputs
- Separate enable input for each output
- Common select inputs
- Permits multiplexing from n lines to 1 line
- Enable line provided for cascading (n lines to 1 line)
- Specified from -40°C to +105°C
- Packaging information: DIP16/SOP16/TSSOP16

ORDERING INFORMATION

| DEVICE | Package Type | MARKING | Packing | Packing QTY |
|----------------|--------------|----------|---------|-------------|
| SN74HC153N | DIP-16 | 74HC153N | Tube | 1000/Box |
| SN74HC153DTR | SOP-16 | 74HC153 | Tape | 2500/Reel |
| SN74HCT153DTR | SOP-16 | 74HCT153 | Tape | 2500/Reel |
| SN74HCT153TDTR | TSSOP-16 | 74HCT153 | Tape | 3000/Reel |

Block Diagram And Pin Description

Block Diagram

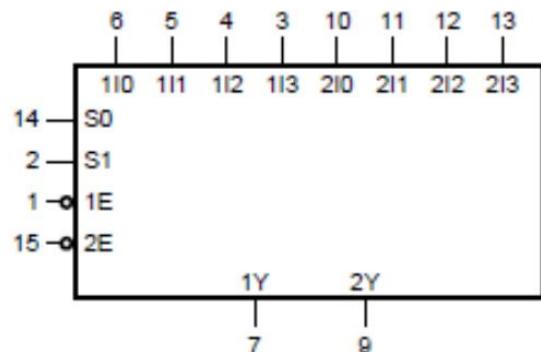


Figure 1. Logic symbol

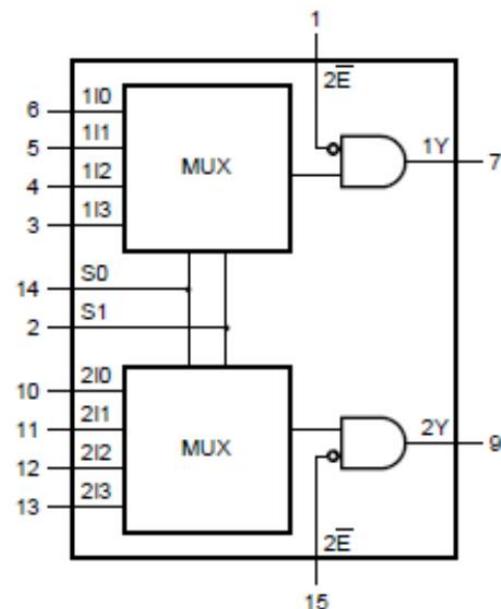


Figure 2. Functional diagram


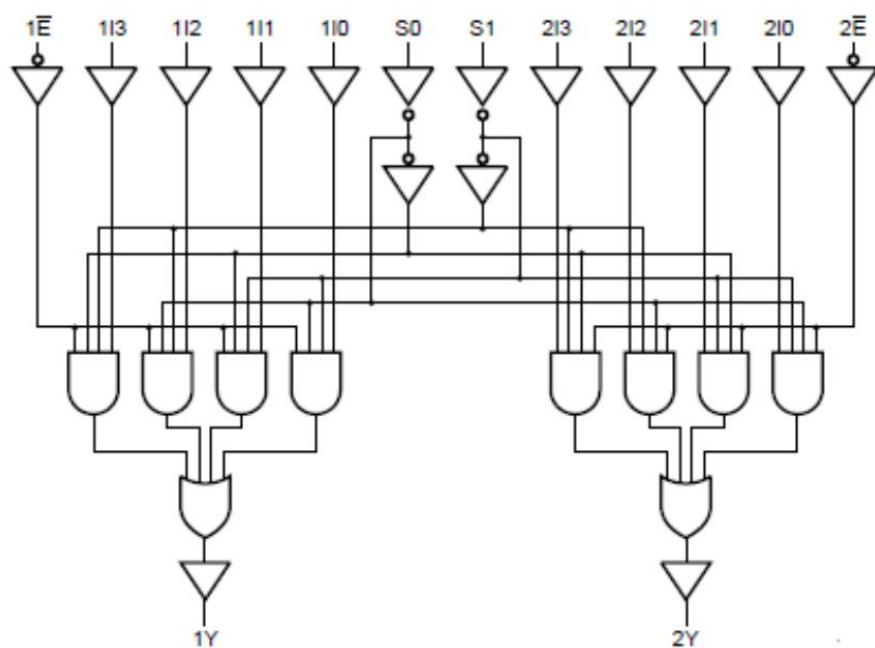


Figure 3. Logic diagram

Pin Configurations

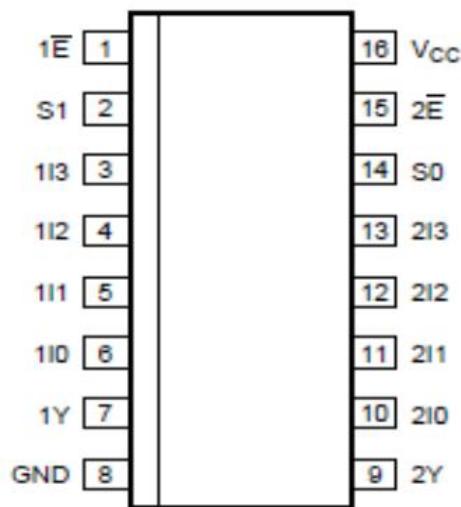

Pin Description

| Pin No. | Pin Name | Description |
|---------|----------|------------------------------|
| 1 | 1̄E | out enable input(active LOW) |
| 2 | S1 | data select input |
| 3 | 1I3 | data input source1 |
| 4 | 1I2 | data input source1 |
| 5 | 1I1 | data input source1 |
| 6 | 1I0 | data input source1 |
| 7 | 1Y | multiplexer output source1 |
| 8 | GND | ground(0V) |
| 9 | 2Y | multiplexer output source2 |
| 10 | 2I0 | data input source2 |
| 11 | 2I1 | data input source2 |
| 12 | 2I2 | data input source2 |
| 13 | 2I3 | data input source2 |
| 14 | S0 | data select input |
| 15 | 2̄E | out enable input(active LOW) |
| 16 | Vcc | supply voltage |

Function Table

| Select Input | | Input | | | | Output Enable | Output |
|--------------|----|-------|-----|-----|-----|---------------|--------|
| S0 | S1 | nI0 | nI1 | nI2 | nI3 | nE | nY |
| X | X | X | X | X | X | H | L |
| L | L | L | X | X | X | L | L |
| L | L | H | X | X | X | L | H |
| H | L | X | L | X | X | L | L |
| H | L | X | H | X | X | L | H |
| L | H | X | X | L | X | L | L |
| L | H | X | X | H | X | L | H |
| H | H | X | X | X | L | L | L |
| H | H | X | X | X | H | L | H |

Note: H=HIGH voltage level; L=LOW voltage level; X=don't care.

Electrical Parameter

Absolute Maximum Ratings (Voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | | Min. | Max. | Unit |
|-------------------------|------------------|--|-----|------|------|------|
| supply voltage | V _{CC} | - | | -0.5 | +7.0 | V |
| input clamping current | I _{IK} | V _I <-0.5V or V _I >V _{CC} +0.5V | | - | ±20 | mA |
| output clamping current | I _{OK} | V _O <-0.5V or V _O >V _{CC} +0.5V | | - | ±20 | mA |
| output current | I _O | -0.5V < V _O < V _{CC} +0.5V | | - | ±25 | mA |
| supply current | I _{CC} | - | | - | 50 | mA |
| ground current | I _{GND} | - | | -50 | - | mA |
| storage temperature | T _{stg} | - | | -65 | +150 | °C |
| total power dissipation | P _{tot} | - | | - | 500 | mW |
| soldering temperature | T _L | 10s | DIP | 245 | | °C |
| | | | SOP | 250 | | |

Note:

- [1] For DIP16 packages: above 70°C the value of P_{tot} derates linearly with 12mW/K.
- [2] For SOP16 packages: above 70°C the value of P_{tot} derates linearly with 8mW/K.
- [3] For (T)SSOP16 packages: above 60°C the value of P_{tot} derates linearly with 5.5mW/K.

Recommended Operating Conditions

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|------------------|-----------------------|------|------|-----------------|------|
| 74HC153 | | | | | | |
| supply voltage | V _{CC} | - | 2.0 | 5.0 | 6.0 | V |
| input voltage | V _I | - | 0 | - | V _{CC} | V |
| output voltage | V _O | - | 0 | - | V _{CC} | V |
| input transition rise and fall rate | Δt/ΔV | V _{CC} =2.0V | - | - | 625 | ns/V |
| | | V _{CC} =4.5V | - | 1.67 | 139 | ns/V |
| | | V _{CC} =6.0V | - | - | 83 | ns/V |
| ambient temperature | T _{amb} | - | -40 | - | +105 | °C |
| 74HCT153 | | | | | | |
| supply voltage | V _{CC} | - | 4.5 | 5.0 | 5.5 | V |
| input voltage | V _I | - | 0 | - | V _{CC} | V |
| output voltage | V _O | - | 0 | - | V _{CC} | V |
| input transition rise and fall rate | Δt/ΔV | V _{CC} =4.5V | - | 1.67 | 139 | ns/V |
| ambient temperature | T _{amb} | - | -40 | - | +105 | °C |

Electrical Characteristics

DC Characteristics 1 (T_{amb}=25°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|------------------------------|-----------------|--|--|------|------|------|---|
| 74HC153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =2.0V | 1.5 | 1.2 | - | V | |
| | | V _{CC} =4.5V | 3.15 | 2.4 | - | V | |
| | | V _{CC} =6.0V | 4.2 | 3.2 | - | V | |
| LOW-level input voltage | V _{IL} | V _{CC} =2.0V | - | 0.8 | 0.5 | V | |
| | | V _{CC} =4.5V | - | 2.1 | 1.35 | V | |
| | | V _{CC} =6.0V | - | 2.8 | 1.8 | V | |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} | I _O =-20uA;V _{CC} =2.0V | 1.9 | 2.0 | - | V |
| | | | I _O =-20uA;V _{CC} =4.5V | 4.4 | 4.5 | - | V |
| | | | I _O =-20uA;V _{CC} =6.0V | 5.9 | 6.0 | - | V |
| | | | I _O =-4.0mA;V _{CC} =4.5V | 3.98 | 4.32 | - | V |
| | | | I _O =-5.2mA;V _{CC} =6.0V | 5.48 | 5.81 | - | V |
| LOW-level output voltage | V _{OL} | V _I =V _{IH} or V _{IL} | I _O =20uA;V _{CC} =2.0V | - | 0 | 0.1 | V |
| | | | I _O =20uA;V _{CC} =4.5V | - | 0 | 0.1 | V |
| | | | I _O =20uA;V _{CC} =6.0V | - | 0 | 0.1 | V |
| | | | I _O =4.0mA;V _{CC} =4.5V | - | 0.15 | 0.26 | V |
| | | | I _O =5.2mA;V _{CC} =6.0V | - | 0.16 | 0.26 | V |
| input leakage current | I _I | V _I =V _{CC} or GND;V _{CC} =6.0V | - | - | ±0.1 | μA | |



| | | | | | | | |
|---------------------------|------------------|--|------------------------|------|------|-----|----|
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V | - | - | 8.0 | μA | |
| input capacitance | C _I | - | - | 3.5 | - | pF | |
| 74HCT153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =4.5V to 5.5V | 2.0 | 1.6 | - | V | |
| LOW-level input voltage | V _{IL} | V _{CC} =4.5V to 5.5V | - | 1.2 | 0.8 | V | |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} V _{CC} =4.5V | I _O =-20uA | 4.4 | 4.5 | - | V |
| LOW-level output voltage | | | I _O =-4.0uA | 3.98 | 4.32 | - | V |
| input leakage current | I _I | V _I =V _{CC} or GND; V _{CC} =5.5V | - | 0 | 0.1 | V | |
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =5.5V | - | - | 8.0 | μA | |
| Additional Supply current | ΔI _{CC} | V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; I _O =0V; V _{CC} =4.5V to 5.5V | 1In,2In | - | 45 | 162 | μA |
| | | | nE | - | 60 | 216 | μA |
| | | | Sn | - | 135 | 486 | μA |
| input capacitance | C _I | - | - | 3.5 | - | pF | |

DC Characteristics 2

(T_{amb}=-40°C to +85°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------|-----------------|--|---|------|------|------|---|
| 74HC153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =2.0V | 1.5 | - | - | V | |
| | | V _{CC} =4.5V | 3.15 | - | - | V | |
| | | V _{CC} =6.0V | 4.2 | - | - | V | |
| LOW-level input voltage | V _{IL} | V _{CC} =2.0V | - | - | 0.5 | V | |
| | | V _{CC} =4.5V | - | - | 1.35 | V | |
| | | V _{CC} =6.0V | - | - | 1.8 | V | |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} | I _O =-20uA; V _{CC} =2.0V | 1.9 | - | V | |
| | | | I _O =-20uA; V _{CC} =4.5V | 4.4 | - | V | |
| | | | I _O =-20uA; V _{CC} =6.0V | 5.9 | - | V | |
| | | | I _O =-4.0mA; V _{CC} =4.5V | 3.84 | - | V | |
| | | | I _O =-5.2mA; V _{CC} =6.0V | 5.34 | - | V | |
| LOW-level output voltage | V _{OL} | V _I =V _{IH} or V _{IL} | I _O =20uA; V _{CC} =2.0V | - | - | 0.1 | V |
| | | | I _O =20uA; V _{CC} =4.5V | - | - | 0.1 | V |
| | | | I _O =20uA; V _{CC} =6.0V | - | - | 0.1 | V |
| | | | I _O =4.0mA; V _{CC} =4.5V | - | - | 0.33 | V |
| | | | I _O =5.2mA; V _{CC} =6.0V | - | - | 0.33 | V |
| input leakage current | I _I | V _I = V _{CC} or GND; V _{CC} =6.0V | - | - | ±1.0 | μA | |

| | | | | | | | |
|---------------------------|------------------|---|--|------|---|------|----|
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V | | - | - | 80 | μA |
| 74HCT153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =4.5V to 5.5V | | 2.0 | - | - | V |
| LOW-level input voltage | V _{IL} | V _{CC} =4.5V to 5.5V | | - | - | 0.8 | V |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} V _{CC} =4.5V | I _O =-20uA | 4.4 | - | - | V |
| | | | I _O =-4.0mA | 3.84 | - | - | V |
| LOW-level output voltage | V _{OL} | V _I =V _{IH} or V _{IL} | I _O =20uA; V _{CC} =4.5V | - | - | 0.1 | V |
| | | | I _O =5.2uA; V _{CC} =6.0V | - | - | 0.33 | V |
| input leakage current | I _I | V _I = V _{CC} or GND; V _{CC} =5.5V | | - | - | ±1.0 | μA |
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =5.5V | | - | - | 80 | μA |
| additional supply current | ΔI _{CC} | V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; I _O =0V; V _{CC} =4.5V to 5.5V | 1In,2In | - | - | 203 | μA |
| | | | nE | - | - | 270 | μA |
| | | | S _n | - | - | 608 | μA |

DC Characteristics 3

(T_{amb}=-40°C to +105°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|---------------------------|-----------------|--|---|------|------|------|---|
| 74HC153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =2.0V | 1.5 | - | - | V | |
| | | V _{CC} =4.5V | 3.15 | - | - | V | |
| | | V _{CC} =6.0V | 4.2 | - | - | V | |
| LOW-level input voltage | V _{IL} | V _{CC} =2.0V | - | - | 0.5 | V | |
| | | V _{CC} =4.5V | - | - | 1.35 | V | |
| | | V _{CC} =6.0V | - | - | 1.8 | V | |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} | I _O =-20uA; V _{CC} =2.0V | 1.9 | - | - | V |
| | | | I _O =-20uA; V _{CC} =4.5V | 4.4 | - | - | V |
| | | | I _O =-20uA; V _{CC} =6.0V | 5.9 | - | - | V |
| | | | I _O =-4.0mA; V _{CC} =4.5V | 3.7 | - | - | V |
| | | | I _O =-5.2mA; V _{CC} =6.0V | 5.2 | - | - | V |
| LOW-level output voltage | V _{OL} | V _I =V _{IH} or V _{IL} | I _O =20uA; V _{CC} =2.0V | - | - | 0.1 | V |
| | | | I _O =20uA; V _{CC} =4.5V | - | - | 0.1 | V |
| | | | I _O =20uA; V _{CC} =6.0V | - | - | 0.1 | V |
| | | | I _O =4.0mA; V _{CC} =4.5V | - | - | 0.4 | V |
| | | | I _O =5.2mA; V _{CC} =6.0V | - | - | 0.4 | V |

| | | | | | | | |
|---------------------------|------------------|---|--|-----|---|------|----|
| input leakage current | I _I | V _I = V _{CC} or GND; V _{CC} =6.0V | | - | - | ±1.0 | μA |
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =6.0V | | - | - | 160 | μA |
| 74HCT153 | | | | | | | |
| HIGH-level input voltage | V _{IH} | V _{CC} =4.5V to 5.5V | | 2.0 | - | - | V |
| LOW-level input voltage | V _{IL} | V _{CC} =4.5V to 5.5V | | - | - | 0.8 | V |
| HIGH-level output voltage | V _{OH} | V _I =V _{IH} or V _{IL} V _{CC} =4.5V | I _O =-20uA | 4.4 | - | - | V |
| | | | I _O =-4.0mA | 3.7 | - | - | V |
| LOW-level output voltage | V _{OL} | V _I =V _{IH} or V _{IL} | I _O =20uA; V _{CC} =4.5V | - | - | 0.1 | V |
| | | | I _O =5.2uA; V _{CC} =6.0V | - | - | 0.4 | V |
| input leakage current | I _I | V _I = V _{CC} or GND; V _{CC} =5.5V | | - | - | ±1.0 | μA |
| supply current | I _{CC} | V _I =V _{CC} or GND; I _O =0A; V _{CC} =5.5V | | - | - | 160 | μA |
| additional supply current | ΔI _{CC} | V _I =V _{CC} -2.1V; other inputs at V _{CC} or GND; I _O =0V; V _{CC} =4.5V to 5.5V | 1In,2In | - | - | 221 | μA |
| | | | nE | - | - | 294 | μA |
| | | | S _n | - | - | 662 | μA |

AC Characteristics 1 (T_{amb}=25°C, GND =0V; t_r=t_f=6ns; C_L=50pF,unless otherwise specified.)

| Parameter | Symbol | Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------|-----------------|--|-----------------------|------|------|------|------|
| 74HC153 | | | | | | | |
| Propagation delay | t _{pd} | 1In to nY,2In to nY; see Figure5 ^[1] | V _{CC} =2.0V | - | 47 | 145 | ns |
| | | | V _{CC} =4.5V | - | 17 | 29 | ns |
| | | | VCC=5.0V;CL=15pF | - | 14 | - | ns |
| | | | V _{CC} =6.0V | - | 14 | 25 | ns |
| | | Sn to nY; see Figure6 | V _{CC} =2.0V | - | 50 | 150 | ns |
| | | | V _{CC} =4.5V | - | 18 | 30 | ns |
| | | | VCC=5.0V;CL=15pF | - | 15 | - | ns |
| | | | V _{CC} =6.0V | - | 14 | 26 | ns |
| | | nE to nY see Figure6 | V _{CC} =2.0V | - | 33 | 100 | ns |
| | | | V _{CC} =4.5V | - | 12 | 20 | ns |
| | | | VCC=5.0V;CL=15pF | - | 10 | - | ns |
| | | | V _{CC} =6.0V | - | 10 | 17 | ns |
| transition time | t _t | see Figure5 ^[2] | V _{CC} =2.0V | - | 19 | 75 | ns |
| | | | V _{CC} =4.5V | - | 7 | 15 | ns |
| | | | V _{CC} =6.0V | - | 6 | 13 | ns |
| power dissipation capacitance | C _{PD} | per package; V _I =GND to V _{CC} ^[3] | | - | 30 | - | pF |

| 74HCT153 | | | | | | | |
|-------------------------------|-----------|--|------------------------|---|----|----|----|
| HIGH to LOW propagation delay | t_{PHL} | 1In to nY,2In to nY; see Figure5 ^[1] | $V_{CC}=4.5V$ | - | 19 | 34 | ns |
| | | | $V_{CC}=5.0V;C_L=15pF$ | - | 16 | - | ns |
| LOW to HIGH propagation delay | t_{PLH} | 1In to nY,2In to nY; see Figure5 | $V_{CC}=4.5V$ | - | 13 | 24 | ns |
| | | | $V_{CC}=5.0V;C_L=15pF$ | - | 16 | - | ns |
| Propagation delay | t_{pd} | Sn to nY see Figure6 | $V_{CC}=4.5V$ | - | 20 | 34 | ns |
| | | | $V_{CC}=5.0V;C_L=15pF$ | - | 17 | - | ns |
| | | $n\bar{E}$ to nY see Figure6 | $V_{CC}=4.5V$ | - | 14 | 27 | ns |
| | | | $V_{CC}=5.0V;C_L=15pF$ | - | 11 | - | ns |
| transition time | t_t | $V_{CC}=4.5V$; see Figure5 ^[2] | | - | 7 | 15 | ns |
| power dissipation capacitance | C_{PD} | per package; $V_I=GND$ to $V_{CC}-1.5V$ ^[3] | | - | 30 | - | pF |

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_t is the same as t_{THL} and t_{TLH} .

[3] C_{PD} is used to determine the dynamic power dissipation (P_D in uW).

$$P_D=C_{PD}\times V_{CC}^2\times f_i\times N+\sum(C_L\times V_{CC}^2\times f_o) \text{ where:}$$

f_i =input frequency in MHz;

f_o =output frequency in MHz;

C_L =output load capacitance in pF;

V_{CC} =supply voltage in V;

N=number of inputs switching;

$\sum(C_L\times V_{CC}^2\times f)$ =sum of outputs.

AC Characteristics 2 (Tamb=-40°C to +85°C,GND=0V; $t_t=t_f=6ns;C_L=50pF$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|-------------------|----------|--|---------------|------|------|------|----|
| 74HC153 | | | | | | | |
| Propagation delay | t_{pd} | 1In to nY,2In to nY; see Figure5 ^[1] | $V_{CC}=2.0V$ | - | - | 180 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 36 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 31 | ns |
| | | Sn to nY; see Figure6 | $V_{CC}=2.0V$ | - | - | 190 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 38 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 33 | ns |
| | | $n\bar{E}$ to nY see Figure6 | $V_{CC}=2.0V$ | - | - | 125 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 25 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 21 | ns |

| | | | | | | | |
|-----------------|-------|----------------------------|---------------|---|---|----|----|
| transition time | t_t | see Figure5 ^[2] | $V_{CC}=2.0V$ | - | - | 95 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 19 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 16 | ns |

74HCT153

| | | | | | | | | |
|-------------------------------|-----------|--|---------------|---|---|----|----|----|
| HIGH to LOW propagation delay | t_{PHL} | 1In to nY,2In to nY; see Figure5 ^[1] | $V_{CC}=4.5V$ | - | - | 43 | ns | |
| LOW to HIGH propagation delay | t_{PLH} | 1In to nY,2In to nY; see Figure5 | $V_{CC}=4.5V$ | - | - | 30 | ns | |
| Propagation delay | t_{pd} | Sn to nY see Figure6 | $V_{CC}=4.5V$ | - | - | 43 | ns | |
| | | $n\bar{E}$ to nY see Figure6 | $V_{CC}=4.5V$ | - | - | 34 | ns | |
| transition time | t_t | $V_{CC}=4.5V$; see Figure5 ^[2] | | | - | - | 19 | ns |

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_t is the same as t_{THL} and t_{TLH} .

AC Characteristics 3 (Tamb=-40°C to +105°C,GND=0V; $t_r=t_f=6ns$; $C_L=50pF$, unless otherwise specified.)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit | |
|-------------------------------|-----------|--|---------------|------|------|------|----|
| 74HC153 | | | | | | | |
| Propagation delay | t_{pd} | 1In to nY,2In to nY; see Figure5 ^[1] | $V_{CC}=2.0V$ | - | - | 220 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 44 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 38 | ns |
| | | Sn to nY; see Figure6 | $V_{CC}=2.0V$ | - | - | 225 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 45 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 38 | ns |
| | | $n\bar{E}$ to nY see Figure6 | $V_{CC}=2.0V$ | - | - | 150 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 30 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 26 | ns |
| transition time | t_t | see Figure5 ^[2] | $V_{CC}=2.0V$ | - | - | 110 | ns |
| | | | $V_{CC}=4.5V$ | - | - | 22 | ns |
| | | | $V_{CC}=6.0V$ | - | - | 19 | ns |
| 74HCT153 | | | | | | | |
| HIGH to LOW propagation delay | t_{PHL} | 1In to nY,2In to nY; see Figure5 ^[1] | $V_{CC}=4.5V$ | - | - | 51 | ns |
| LOW to HIGH propagation delay | t_{PLH} | 1In to nY,2In to nY; see Figure5 | $V_{CC}=4.5V$ | - | - | 36 | ns |
| Propagation delay | t_{pd} | Sn to nY see Figure6 | $V_{CC}=4.5V$ | - | - | 51 | ns |
| | | $n\bar{E}$ to nY | $V_{CC}=4.5V$ | - | - | 41 | ns |

| | | | | | | | |
|-----------------|-------|--|--|---|---|----|----|
| | | see Figure6 | | | | | |
| transition time | t_t | $V_{CC}=4.5V$; see Figure5 ^[2] | | - | - | 22 | ns |

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

[2] t_t is the same as t_{THL} and t_{TLH} .

Testing Circuit

AC Testing Circuit

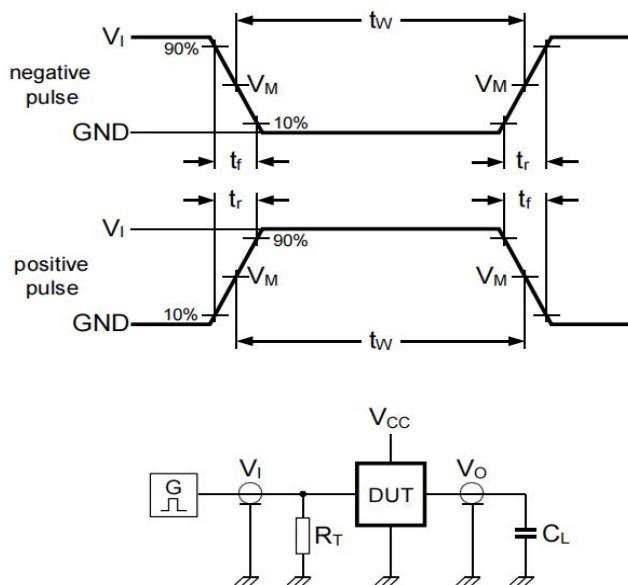


Figure 4. Test circuit for measuring switching times

Definitions for test circuit:

C_L =Load capacitance including jig and probe capacitance.

R_T =Termination resistance should be equal to the output impedance Z_o of the pulse generator.

AC Testing Waveforms

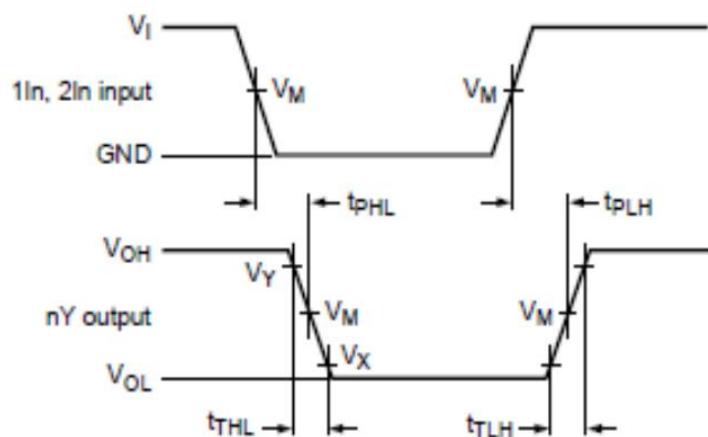
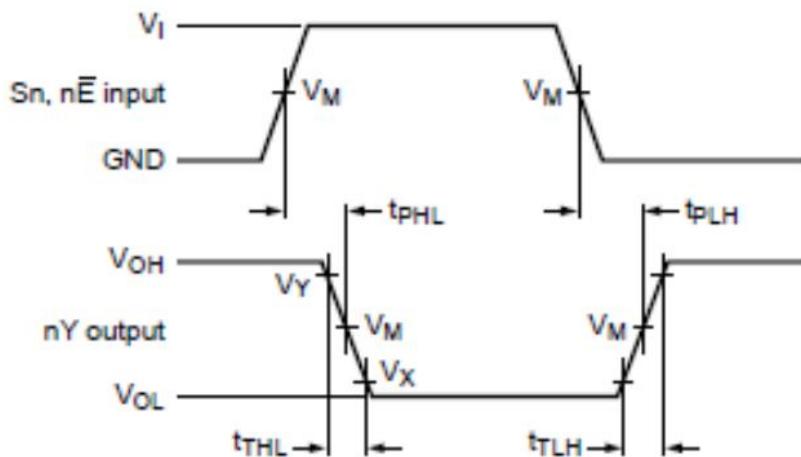


Figure 5. Waveforms showing the input (1In, 2In) to output (1Y, 2Y) propagation delays and output transition times

Figure 6. Waveforms showing input ($S_n, n\bar{E}$) to output (nY) propagation delays

Measurement Points


| Type | Input | Output | | |
|----------|---------------------|---------------------|---------------------|---------------------|
| | | V_M | V_X | V_Y |
| 74HC153 | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $0.1 \times V_{CC}$ | $0.9 \times V_{CC}$ |
| 74HCT153 | 1.3V | 1.3V | $0.1 \times V_{CC}$ | $0.9 \times V_{CC}$ |

Test Data


| Type | Input | | C_L | Test |
|----------|----------|------------|------------|--------------------|
| | V_I | t_r, t_f | | |
| 74HC153 | V_{CC} | 6.0ns | 15pF, 50pF | t_{PHL}, t_{PLH} |
| 74HCT153 | 3.0V | 6.0ns | 15pF, 50pF | t_{PHL}, t_{PLH} |

Package Information

DIP16

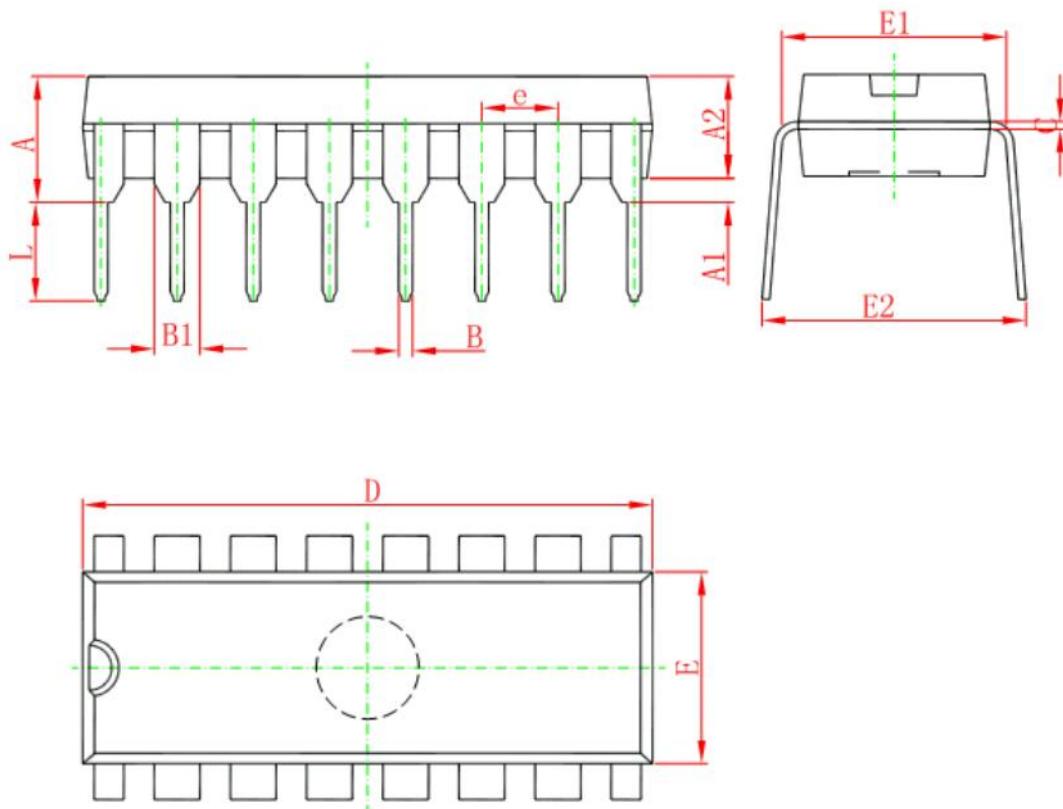


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 3.710 | 4.310 | 0.146 | 0.170 |
| A1 | 0.510 | | 0.020 | |
| A2 | 3.200 | 3.600 | 0.126 | 0.142 |
| B | 0.380 | 0.570 | 0.015 | 0.022 |
| B1 | 1.524(BSC) | | 0.060(BSC) | |
| C | 0.204 | 0.360 | 0.008 | 0.014 |
| D | 18.800 | 19.200 | 0.740 | 0.756 |
| E | 6.200 | 6.600 | 0.244 | 0.260 |
| E1 | 7.320 | 7.920 | 0.288 | 0.312 |
| e | 2.540(BSC) | | 0.100(BSC) | |
| L | 3.000 | 3.600 | 0.118 | 0.142 |
| E2 | 8.400 | 9.000 | 0.331 | 0.354 |

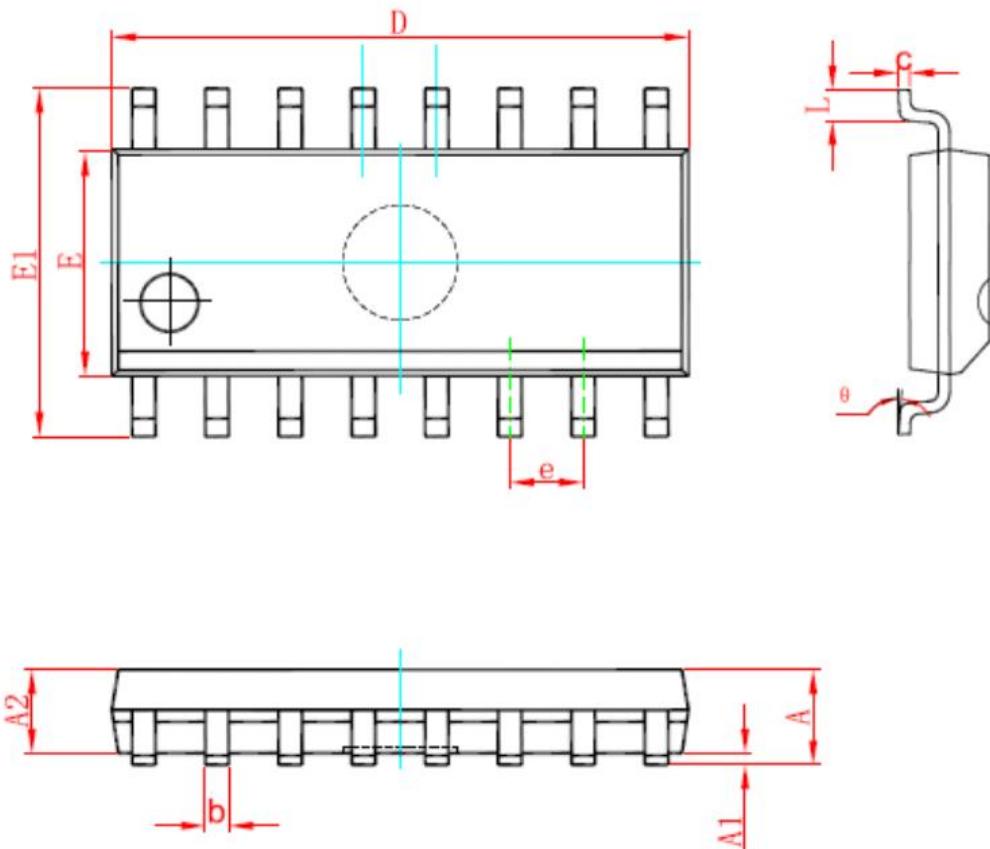

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.330 | 0.510 | 0.013 | 0.020 |
| C | 0.170 | 0.250 | 0.007 | 0.010 |
| D | 9.800 | 10.200 | 0.386 | 0.402 |
| E | 3.800 | 4.000 | 0.150 | 0.157 |
| E1 | 5.800 | 6.200 | 0.228 | 0.244 |
| e | 1.270(BSC) | | 0.050(BSC) | |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

TSSOP16

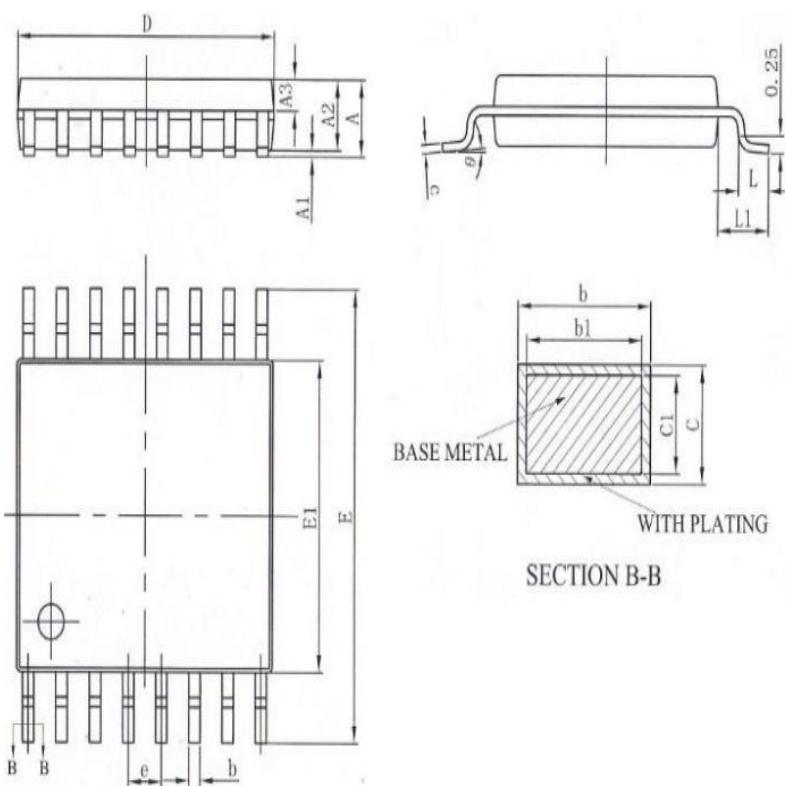

| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | - | - | 1.20 |
| A1 | 0.05 | - | 0.15 |
| A2 | 0.90 | 1.00 | 1.05 |
| A3 | 0.39 | 0.44 | 0.49 |
| b | 0.20 | - | 0.28 |
| bl | 0.19 | 0.22 | 0.25 |
| c | 0.13 | - | 0.17 |
| cl | 0.12 | 0.13 | 0.14 |
| D | 4.90 | 5.00 | 5.10 |
| E | 6.20 | 6.40 | 6.60 |
| E1 | 4.30 | 4.40 | 4.50 |
| e | 0.65BSC | | |
| L | 0.45 | 0.60 | 0.75 |
| L1 | 1.00BSC | | |
| θ | 0 | - | 8° |

Statements And Notes

| Part name | Hazardous substances or Elements | | | | | | | | | |
|-------------------------|--|-------------------------------|-------------------------------|-------------------------------|--------------------------|--------------------------------|-------------------|------------------------|---------------------------|----------------------|
| | Lead and lead compounds | Mercury and mercury compounds | Cadmium and cadmium compounds | Hexavalent chromium compounds | Polybrominated biphenyls | Polybrominated biphenyl ethers | Dibutyl phthalate | Butyl benzyl phthalate | Di-2-ethylhexyl phthalate | Diisobutyl phthalate |
| Lead frame | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic resin | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Chip | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| The lead | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Plastic sheet installed | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| explanation | ○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements | | | | | | | | | |

Statement:

- ✧ Shenzhen xinbole electronics co., ltd. reserves the right to change the product specifications, without notice! Before placing an order, the customer needs to confirm whether the information obtained is the latest version, and verify the integrity of the relevant information.
- ✧ Any semiconductor product is liable to fail or malfunction under certain conditions, and the buyer shall be responsible for complying with safety standards in the system design and whole machine manufacturing using Shenzhen xinbole electronics co., ltd products, and take appropriate security measures to avoid the potential risk of failure may result in personal injury or property losses of the situation occurred!
- ✧ Product performance is never ending, Shenzhen xinbole electronics co., ltd will be dedicated to provide customers with better performance, better quality of integrated circuit products.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Encoders, Decoders, Multiplexers & Demultiplexers category:

Click to view products by XBLW manufacturer:

Other Similar products are found below :

[MC74HC163ADTG](#) [74HC253N](#) [NLV74VHC1G01DFT1G](#) [NLVHCT4851ADTR2G](#) [NLV14028BDR2G](#) [COMX-CAR-210](#) [SN74LS148N](#)
[PI3B3251LE](#) [PI3B3251QE](#) [NLV74HC4851AMNTWG](#) [MC74LVX257DG](#) [M74HCT4851ADWR2G](#) [NL7SZ19DBVT1G](#) [PI5C3253LEX](#)
[MC74HC251ADTG](#) [MC74ACT138NG](#) [NB3L8533DTR2G](#) [NLV74AC157DR2G](#) [74HC138DT](#) [74HC153DT](#) [74HC238DT](#) [74HC151DT](#)
[ADS131M02IRUKR](#) [CBMG709ATS16](#) [74HC238N](#) [HT74HC154ARWZ](#) [RS2G139XS16-G](#) [74HCT251D](#) [74HC138T](#) [U74HC138G-S16-R](#)
[AIP74HCT138SA.TB](#) [XD74C922](#) [SN74LVC1G19DBVR\(UMW\)](#) [RS1G157XC6](#) [74HC151M/TR](#) [AiP74HC237TA16.TB](#)
[AIP74HC138TA16.TB](#) [74HC138DRG](#) [AiP74LVC138TA16.TB](#) [CD4511BDRG](#) [AiP74LVC157TA16.TB](#) [SN74HC42N\(LX\)](#)
[SN74LS157N\(LX\)](#) [SN74LS42N](#) [TC4053BFT\(EL,N\)](#) [74VHC4052AFT\(BE\)](#) [TC74VHC138FK\(EL,K\)](#) [TC74HC151AF\(EL,F\)](#)
[SN74HC145DR\(LX\)](#) [SN74HC139DR\(LX\)](#)