

# XELTEK

## SuperPro®7000

High-speed Universal Programmer for large NAND Flash / eMMC devices.  
Transform into a mini gang programmer.

Xeltek, Inc.  
1296 Kifer Rd. Suite #605  
Sunnyvale, CA 94086  
United States

Tel: 14085308080  
Fax: 408.530.0096  
Email: info@xeltek.com



### Features:

- Supports **137 IC manufacturers, 13,400+ IC devices** (Device support as of December 2012, check SuperPro7000 [device list](#) for current device support).  
New devices are continuously added to SuperPro7000 until the device library reaches over SuperPro6000 device count. Since the firmware is designed from scratch, new algorithms are written to support devices from current SuperPro5000/6000 device library. **However, any device a user wants programmed could be added quickly.**
- Built-in **ARM11 MCU processor** improves eMMC programming speed by 10 times compared to SuperPro5000.
- Supports eMMC / NAND files up to **256 GB**.
- Supports Intel **LR1** and **LR2 eMMC** modules up to **64 GB**.
- Powerful new algorithm to **program up to four chips simultaneously**.
- **Customized 4socket gang adapter + Programming algorithm**. (Optional)
- New generation of pin-driver technology ensures higher reliability.
- Three operating modes:
  1. **PC mode** via USB2.0 port and PC communication.
  2. **Local Area Network (LAN) mode** for access to LAN local or remote control.
    - a) One or more units may be controlled by an operator for gang / cluster operation for volume programming. (Optional)
    - b) One unit may be shared by multiple users in a lab environment. (Optional)
    - c) A unit on the factory floor may be controlled remotely.

3. **Stand-Alone mode (no PC required)**. Operates via built-in keyboard, LCD display and removable memory (standard SD card). Setup is flexible and simple to expand (**1-15 units**) for large volume production on the factory floor. Projects files (limited only by SD card capacity limit) are created online and downloaded into the SD card.

- **Universal 144 pin-driver** - New pin-driver technology provides a cleaner signal, wider voltage range and more accurate clock frequency.
- Universal adaptors are available for various package types (up to 144 pins). New device support is faster and simpler.
- Improved chip security mechanisms with built-in self-calibration.
- Automatic chip detection.
- Improved overvoltage / overcurrent and ESD protection to avoid programmer damage.
- Powerful yet user-friendly software features streamline operations, improve efficiency and reduce user mistakes during programming procedures.

**Production mode** start chip operation upon proper chip is insertion.

**Project function** simplifies processes such as Device Selection, File Loading, Device Configuration Setting, Program Option, and Batch File Setting into one step.


**Password** can be set for project files for volume production control

**Batch** command combines device operations like Program, Verify, and Security into a single command at any sequence.

**Serial number generator** is available as standard or customer-specific functions.

**Log file** is useful for quality tracking.

- Quick technical support and free new device support.
- Supports Windows **XP / Vista / Win7**

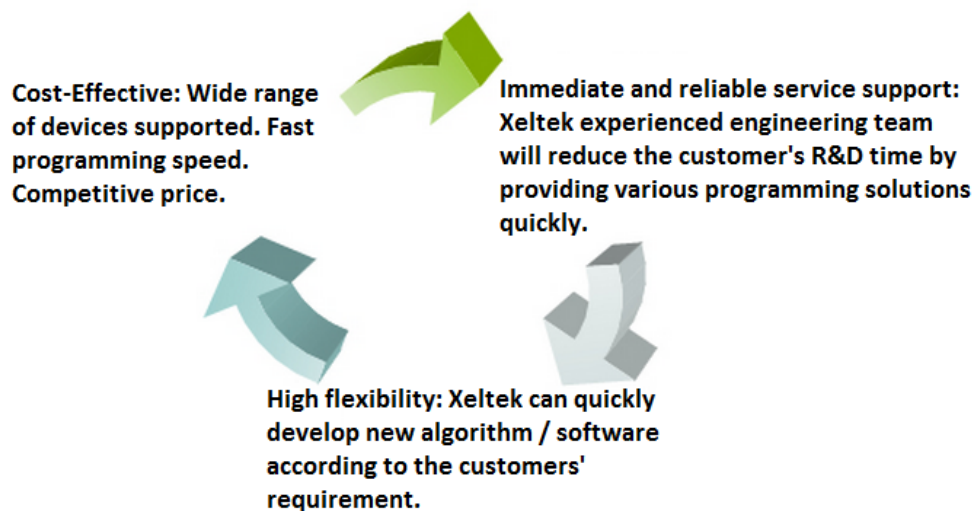



**Price: \$2495**

### **Device Updates:**

- XELTEK updates software and device algorithm regularly.
- XELTEK adds devices upon customer's request. General algorithm upgrades completed within a week.

### **Warranty Support:**

- Programmer is warranted to be free of manufacturing or workmanship defects for two years from the date of purchase.
- Same day Phone/Email/Chat support.
- Large inventory allow same day shipping for majority of items.

### **Hardware & Electrical Specifications:**

- Supported devices include (but not limited to) EPROM, Paged EPROM, Parallel and Serial EEPROM, FPGA Configuration PROM, FLASH memory (NOR & NAND), BROM, NVRAM, SPLD, CPLD, EPLD, Firmware HUB, Microcontroller, MCU.
- Packages supported (but not limited to) DIP, SDIP, PLCC, JLCC, SOIC, QFP, TQFP, PQFP, VQFP, TSOP, SOP, TSOPII, PSOP, TSSOP, SON, EBGA, FBGA, VFBGA, uBGA, CSP, SCSP.
- NAND Flash library supports dozens of major platforms such as Samsung (XSR1.0/1.6), Qualcomm, HYNIX (HIFFS), MTK (Solution V1.1), ICERA (v1.0/2.0), ST (7162, 7141, etc.), AMLOGIC (the IF2 / 0), REALTEK PICOCHIP DataLight (Flash FX Pro), Marvell (310/303/920/935 ...), Broadcom, ZTE, Intel (CE4100), UBI, Leadcore LEADCORE The (L1809OG), MSATR.
- PC communication interface: USB2.0 (high speed), LAN (100 M)
- Memory storage: SD card.
- Ground wire socket.
- Keyboard and Display: 6-key membrane keyboard, 20 X 4 line LCD display.
- Power supply: DC 12V / 1.5A
- Programmer size: 184 x 160 x 78 (mm); Programmer Weight: 0.8Kg

- Package size: 310 250 x 145 (mm); packaging weight: 1.65Kg
- Operating temperature range :0-40 ° C
- Operating humidity range: 20% -80%

**Accessories:**

- Main unit with a DIP48 adaptor, AC adaptor, USB2.0 cable, user manual, software CD and registration card.
- Optional accessories: adaptor in various packages, SD card for stand-alone operation.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [xeltek manufacturer](#):*

Other Similar products are found below :

[CX2032](#) [CX1000](#) [CX0032](#) [DX2132](#) [dx3019](#) [CX5103 / DX5103](#) [CX1011](#) [CX2084](#) [CX3002](#) [ISP10/D10](#) [SA008A](#) [SA001A](#) [SA602A](#) [SA636](#)  
[CX5103](#) [SA620](#) [dx2068](#) [SuperPro IS416](#) [CX2044](#) [SUPERPRO 610P](#) [SUPERPRO 6100N](#) [SA244](#)