

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

SPECIFICATIONS

1. Current rating: 2A AC, DC
 2. Voltage rating: 250V AC, DC
 3. Temperature range: -40°C ~ +105°C
 4. Insulation resistance: 1000MΩ Min.
 5. Withstanding voltage: 500V AC/ minute.
 6. Contact resistance: 20mΩ Max.
- Max. Processing Temp: 240°C~260°C for 30-60 seconds (260°C for 10 seconds)

Material:





Insulator: PA6T UL 94V-0 Black
 Contact: Brass/Matte-tin plated Gold-Flash
 Mate with PM200 /I200 series

Ordering Code:

BH200R-xxP

- 1 2
 1. 序列号
 2. Pin位数: 10P=2x05P

No. of Pins/Row	Dimension	
	A	B
06	10.0	19.5
08	14.0	23.5
10	18.0	27.5
12	22.0	31.5
14	26.0	35.5
16	30.0	39.5
18	34.0	43.5
20	38.0	47.5
24	46.0	55.5
26	50.0	59.5
30	58.0	67.5
34	66.0	75.5
40	78.0	87.5
50	98.0	107.5
68	134.0	143.5

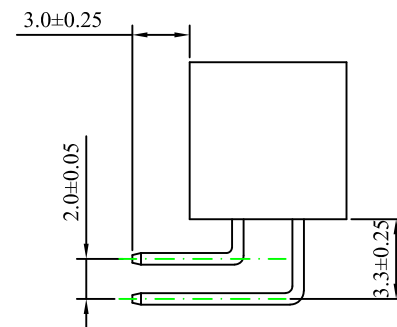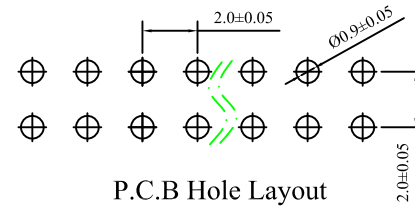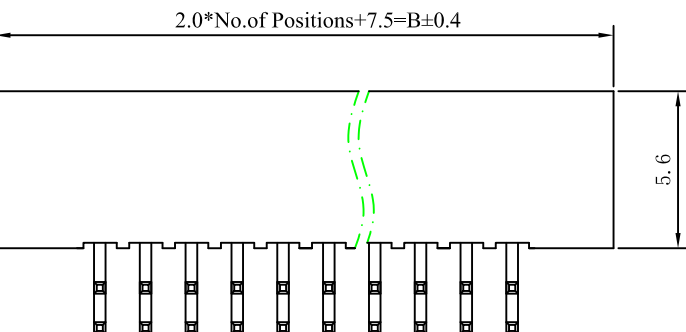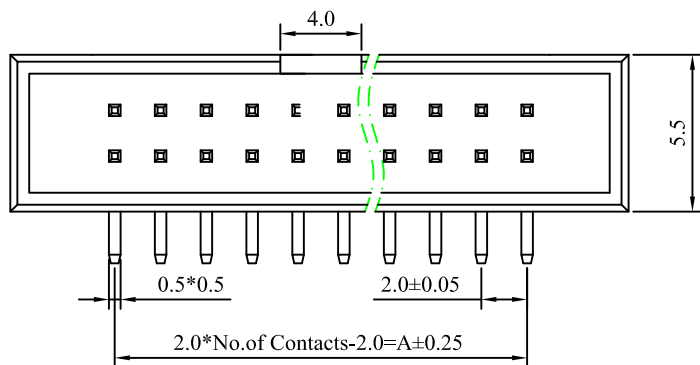

X.±0.50	X.°±	PART NO: BH200R-xxP	XFCN 兴飞连接器			
.XX±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 2.00mm 简易牛角 双排 DIP 90°	0769-82001899			
.XXX±0.10	.XXX°±		www.xfconn.com			
UNITS:	mm	DWG NO:	/			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	VIEW			
		CHKD	SCALE		SHEET	
		DRAW	Wang	NONE		REV
		DATE	2024.01.20	1:1	A1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[571763P](#) [59811-0000](#) [61-168618-12P](#) [D20419-211](#) [D38999/20FJ24PA L/C](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#)
[G38A71314B](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-](#)
[261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [54182-0605](#)
[UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [DRA-26PC-F0R](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [DX40-20P\(55\)](#) [5554841-1](#)
[SM3100F14S-12P](#) [U90B3054061110](#) [U65-E04-4020](#) [557-262M2-06C](#) [60-042222-02S](#) [10099439-003C-TRLF](#) [226-0348-000](#) [10137239-](#)
[0011LF](#) [70.060.1028.0](#) [109029-ZZ](#) [HDR-E26MG1+](#) [SO-0715-02-01-02](#) [GT1-DA04CST](#) [231-303](#) [MS3112E16-8SX](#)