
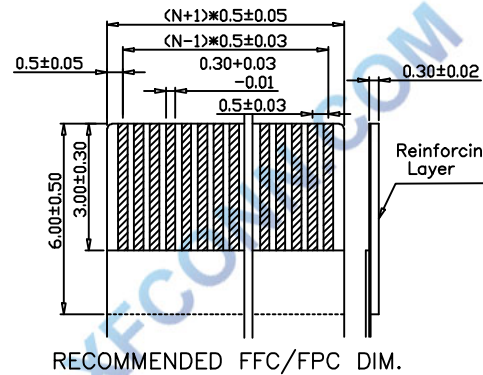



F0502-B-xx-10G-R






R=卷装 无=管装
T=镀锡 G=镀金
Pin位数
B=下接

Electrical Characteristics:
Current rating: 0.4A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 200V AC/Minute
Contact Resistance: ≤ 20mΩ
Insulation resistance: 500MΩ
Relative Humidity: 93%+40°C

Material Description:
Terminal: Phosphor Bronze Tin-Plated
Fitting Nail: Brass Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

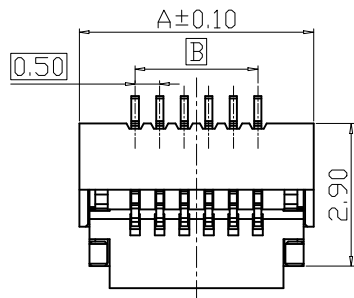

RECOMMENDED FFC/FPC DIM.

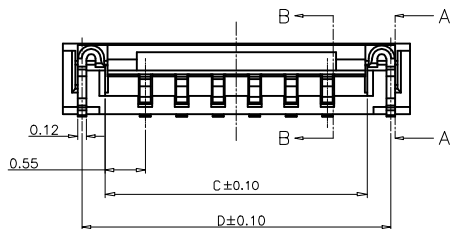

PIN数	已开模 PIN	A	B	C	D
40	V	21.77	19.50	20.60	21.27
39	V	21.27	19.00	20.10	20.77
32	V	17.77	15.50	16.60	17.27
30	V	16.77	14.50	15.60	16.27
28	V	15.77	13.50	14.60	15.27
26	V	14.77	12.50	13.60	14.27
24	V	13.77	11.50	12.60	13.27
21	V	12.27	10.00	11.10	11.77
20	V	11.77	9.50	10.60	11.27
18	V	10.77	8.50	9.60	10.27
16	V	9.77	7.50	8.60	9.27
14	V	8.77	6.50	7.60	8.27
12	V	7.77	5.50	6.60	7.27
10	V	6.77	4.50	5.60	6.27
9	V	6.27	4.00	5.10	5.77
8	V	5.77	3.50	4.60	5.27
6	V	4.77	2.50	3.60	4.27
5	V	4.27	2.00	3.10	3.77

4-50	N*0.5+1.77	(N-1)*0.5	N*0.5+0.6	N*0.5+1.27
Pin No.(N)	A	B	C	D

G				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.	SHEET	1/1	
				X.	±0.30	X°	±5°		CHKD	DATE	2010. 4. 12
				.X	±0.20	.X°	±2°		APPD	UNITS	mm
				.XX	±0.08	.XX°	±1°		VIEW	SCALE	1:1
A0	MODIFICATION	DRAW	DATE	.XXX	±0.03	.XXX°	±0.5°	PRODUCT NAME	FPC 0.50mm Connector	DWG NO.	009
VER								PART. NO.	F0502-B-xx-10G-R		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)