
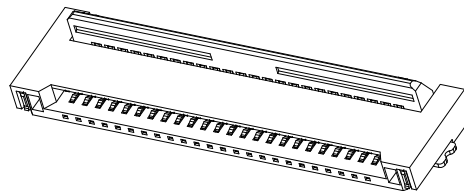




环保物料

TEL:0769-82001899


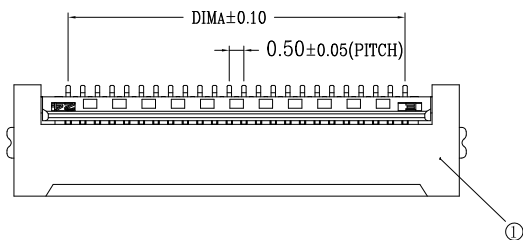


技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻: $\leq 0.03\Omega$ 。
5. 绝缘电阻: $\geq 500M\Omega$ 。

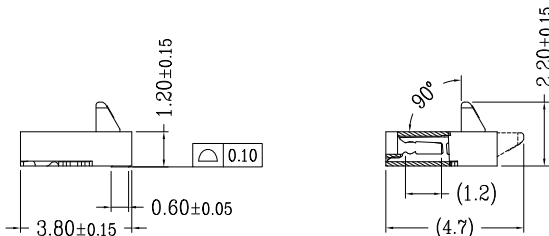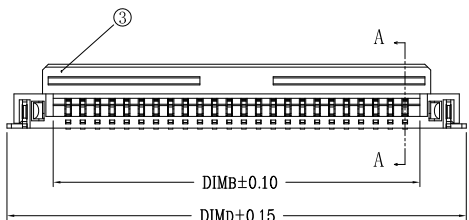

SECTION A-A

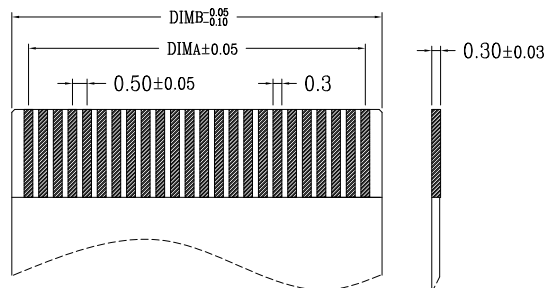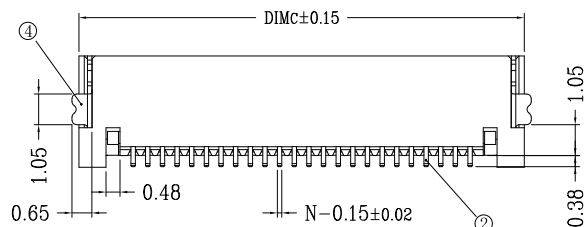

适用线路板

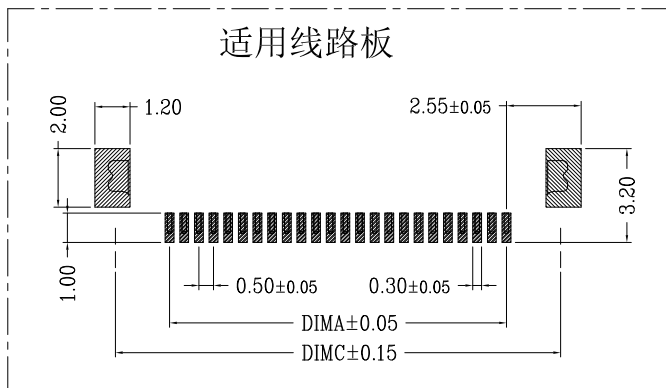

适用扁平线

CKT	DIMA	DIMB	DIMC	DIMD	CKT	DIMA	DIMB	DIMC	DIMD
4	1.50	2.52	5.20	5.68	33	16.00	17.02	19.70	20.18
5	2.00	3.02	5.70	6.18	34	16.50	17.52	20.20	20.68
6	2.50	3.52	6.20	6.68	35	17.00	18.02	20.70	21.18
7	3.00	4.02	6.70	7.18	36	17.50	18.52	21.20	21.68
8	3.50	4.52	7.20	7.68	37	18.00	19.02	21.70	22.18
9	4.00	5.02	7.70	8.18	38	18.50	19.52	22.20	22.68
10	4.50	5.52	8.20	8.68	39	19.00	20.02	22.70	23.18
11	5.00	6.02	8.70	9.18	40	19.50	20.52	23.20	23.68
12	5.50	6.52	9.20	9.68	41	20.00	21.02	23.70	24.18
13	6.00	7.02	9.70	10.18	42	20.50	21.52	24.20	24.68
14	6.50	7.52	10.20	10.68	43	21.00	22.02	24.70	25.18
15	7.00	8.02	10.70	11.18	44	21.50	22.52	25.20	25.68
16	7.50	8.52	11.20	11.68	45	22.00	23.02	25.70	26.18
17	8.00	9.02	11.70	12.18	46	22.50	23.52	26.20	26.68
18	8.50	9.52	12.20	12.68	47	23.00	24.02	26.70	27.18
19	9.00	10.02	12.70	13.18	48	23.50	24.52	27.20	27.68
20	9.50	10.52	13.20	13.68	49	24.00	25.02	27.70	28.18
21	10.00	11.02	13.70	14.18	50	24.50	25.52	28.20	28.68
22	10.50	11.52	14.20	14.68	51	25.00	26.02	28.70	29.18
23	11.00	12.02	14.70	15.18	52	25.50	26.52	29.20	29.68
24	11.50	12.52	15.20	15.68	53	26.00	27.02	29.70	30.18
25	12.00	13.02	15.70	16.18	54	26.50	27.52	30.20	30.68
26	12.50	13.52	16.20	16.68	55	27.00	28.02	30.70	31.18
27	13.00	14.02	16.70	17.18	56	27.50	28.52	31.20	31.68
28	13.50	14.52	17.20	17.68	57	28.00	29.02	31.70	32.18
29	14.00	15.02	17.70	18.18	58	28.50	29.52	32.20	32.68
30	14.50	15.52	18.20	18.68	59	29.00	30.02	32.70	33.18
31	15.00	16.02	18.70	19.18	60	29.50	30.52	33.20	33.68
32	15.50	16.52	19.20	19.68					

序号	品名	材质
①	0.5后压卧式2代胶芯(HI.2)	LCP UL94V-0 本色
②	0.5后压卧式端子(HI.2)	磷青铜/表面镀金 镀锡
③	0.5后压卧式2代后盖(HI.2)	LCP UL94V-0 黑色
④	0.5后压卧式焊片(HI.2)	磷青铜/表面镀锡

TOLERANCE UNLESS OTHERWISE				DRAWN	CK	tan
X.	± 0.30	X°	$\pm 5^{\circ}$	CHKD		
.X	± 0.20	.X°	$\pm 2^{\circ}$	APPD		
.XX	± 0.08	.XX°	$\pm 1^{\circ}$	VIEW		
.XXX	± 0.03	.XXX°	$\pm 0.5^{\circ}$			

XFCN 兴飞连接器有限公司
XFCN CONNECTORS CO.,LTD.

PRODUCT NAME: FPC 0.50mm Connectors
PART. NO.: F0504-H-xx-12G-R

SHEET	1/1
DATE	2020.04.12
UNITS	mm
SCALE	1:1
DWG. NO.	009

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [52746-1671-TR250](#) [10051922-1610EHLF](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [20FLH-RSM1-TB](#) [207356-1](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [FFC05011-10SBB114W5M](#) [502250-8027](#) [67000-008LF](#) [200528-0260](#) [FH28K-10S-0.5SH](#) [FH52K-6S-0.5SH](#) [0.5K-DX-30PWB](#) [DS1020-08-10VBT12](#) [THD0515-34CL-GF](#) [X05A10L28G](#) [ECC2841061EU](#) [1.0K-DHQX-16PWB](#) [1.0K-DHQX-30PWB](#) [1775333-6](#) [10054365-202110ELF](#) [10054365-242110ELF](#) [10054365-282110ELF](#) [10064555-392220HLF](#) [59453-041110EBHLF](#) [59453-091110EDHLF](#) [62674-241141ALF](#) [62684-432100ALF](#) [62684-451100AHLF](#) [62684-5721N0ALF](#) [HFW11R-1STE1MTLF](#) [HFW12R-1STE9LF](#) [HFW14R-1STE9MTLF](#) [HFW18S-2STE9LF](#)