



环保物料

TEL:0769-82001899

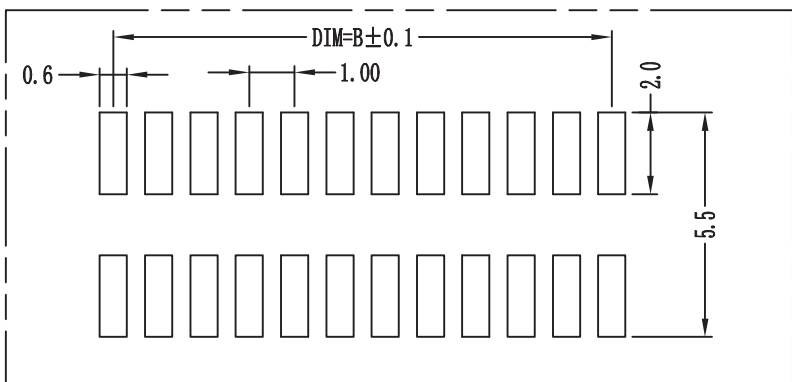




PCB Layout

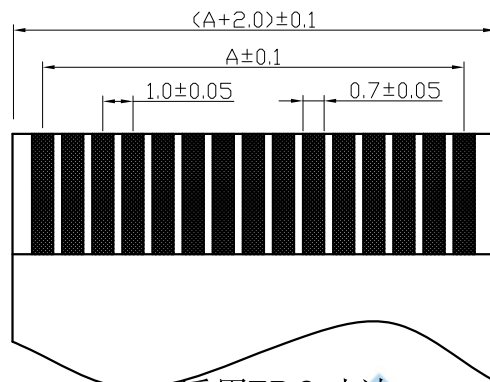

适用FPC寸法
APPLICABLE FPC

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤ 30mΩ
Insulation resistance: ≥ 500mΩ
Relative Humidity: 93%+40°C

Material Description:
Contact: Phosphor Bronze Tin-Leadplated
Housing: HEIGHT TEMP. PLASTIC(UL94V-0)
Slider: HEIGHT TEMP. PLASTIC(UL94V-0)

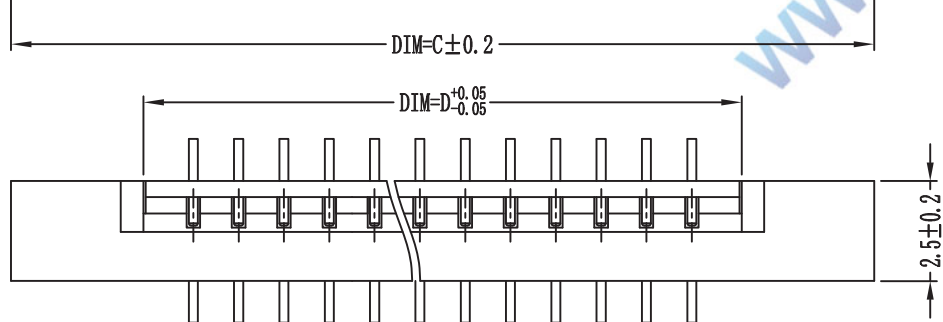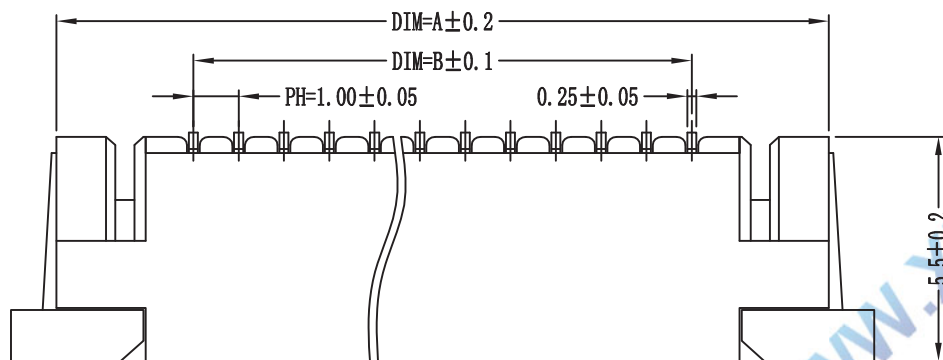

F1003-V-xx-25T-x

R=卷装 无=管装
T=镀锡 G=镀金
Pin位数
V=一字脚位

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.0	29.00	37.0	31.10
29P	34.0	28.00	36.0	30.10
28P	33.0	27.00	35.0	29.10
27P	32.0	26.00	34.0	28.10
26P	31.0	25.00	33.0	27.10
25P	30.0	24.00	32.0	26.10
24P	29.0	23.00	31.0	25.10
23P	28.0	22.00	30.0	24.10
22P	27.0	21.00	29.0	23.10
21P	26.0	20.00	28.0	22.10
20P	25.0	19.00	27.0	21.10
19P	24.0	18.00	26.0	20.10
18P	23.0	17.00	25.0	19.10
17P	22.0	16.00	24.0	18.10
16P	21.0	15.00	23.0	17.10
15P	20.0	14.00	22.0	16.10
14P	19.0	13.00	21.0	15.10
13P	18.0	12.00	20.0	14.10
12P	17.0	11.00	19.0	13.10
11P	16.0	10.00	18.0	12.10
10P	15.0	9.00	17.0	11.10
9P	14.0	8.00	16.0	10.10
8P	13.0	7.00	15.0	9.10
7P	12.0	6.00	14.0	8.10
6P	11.0	5.00	13.0	7.10

AO	MODIFICATION	DRAW	DATE
VER			

TOLERANCE UNLESS OTHERWISE				DRAWN	CK	tan
X.	±0.30	X°	±5°	CHKD		
.X	±0.20	.X°	±2°	APPD		
.XX	±0.08	.XX°	±1°	VIEW	⊕	⊖
.XXX	±0.03	.XXX°	±0.5°			

XFCN兴飞连接器有限公司		SHEET	1/1
CONNECTORS XFCN CONNECTORS CO., LTD.		DATE	2010. 4. 12
PRODUCT NAME	FPC 1.00mm Connectors	UNITS	mm
PART. NO.	F1003-V-XX-25T	SCALE	1:1
		DWG. NO.	009

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)