





F1005-H-xx-28T-x  
 R=卷装 无=管装  
 T=镀锡 G=镀金  
 Pin位数  
 H=上下接

Electrical Characteristics:  
 Current rating: 0.5A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: ≤ 30mΩ  
 Insulation resistance: ≥ 500MΩ

Material Description:  
 Contact: Phosphor Bronze Tin-Leadplated  
 Housing: LCP(UL94V-0)

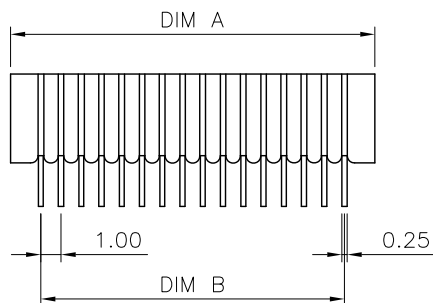

PIN No.	DIM A	DIM B	DIM C	PIN No.	DIM A	DIM B	DIM C
4	6.00	3.00	5.10	24	26.00	23.00	25.10
5	7.00	4.00	6.10	25	27.00	24.00	26.10
6	8.00	5.00	7.10	26	28.00	25.00	27.10
7	9.00	6.00	8.10	27	29.00	26.00	28.10
8	10.00	7.00	9.10	28	30.00	27.00	29.10
9	11.00	8.00	10.10	29	31.00	28.00	30.10
10	12.00	9.00	11.10	30	32.00	29.00	31.10
11	13.00	10.00	12.10	31	33.00	30.00	32.10
12	14.00	11.00	13.10	32	34.00	31.00	33.10
13	15.00	12.00	14.10	33	35.00	32.00	34.10
14	16.00	13.00	15.10	34	36.00	33.00	35.10
15	17.00	14.00	16.10	35	37.00	34.00	36.10
16	18.00	15.00	17.10				
17	19.00	16.00	18.10				
18	20.00	17.00	19.10				
19	21.00	18.00	20.10				
20	22.00	19.00	21.10				
21	23.00	20.00	22.10				
22	24.00	21.00	23.10				
23	25.00	22.00	24.10				

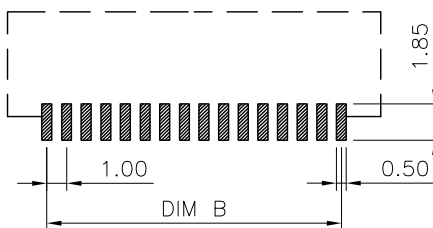

RECOMMENDED PCB LAYOUT

适用扁平电缆

WWW.XFCONN.COM

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	FPC 1.00mm Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	F1005-H-xx-28T	
				.XXX	±0.03	.XXX°	±0.5°			UNITS	mm
				MODIFICATION		DATE			SCALE	1:1	
				DRAW						DWG NO.	009

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [FFC & FPC Connectors](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[00-6200-227-022-800](#) [006205250500825+](#) [006205280500825+](#) [FPH-1602G](#) [FPH-2022G](#) [52610-1275](#) [501864-3091-TR225](#)  
[086222026001800](#) [52610-0675](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [686322124422](#) [XF3M-](#)  
[2915-1B-R100](#) [AYF353125A](#) [AYF530665TA](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-004LF](#)  
[006207341915000+](#) [207356-1](#) [67000-003LF](#) [HFW14R-2STE9LF](#) [SFW12R-5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#)  
[046283021002868+](#) [502250-8027](#) [104267-9617](#) [66987-011LF](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [HFW22R-2STE1H1LF](#) [0781271110](#)  
[5019511030](#) [200528-0260](#) [5039084120](#) [503908-5120](#) [SFW20R-1STGE5LF](#) [FH12-18S-0.5SH](#) [686116183522](#) [FH64MA-11S-0.25SHW](#)  
[686114183522](#) [502078-5362](#) [FH52K-68S-0.5SH](#) [FH26W-23S-0.3SHW\(60\)](#)