



Recommend PCB Layout
General Tolerance±0.05

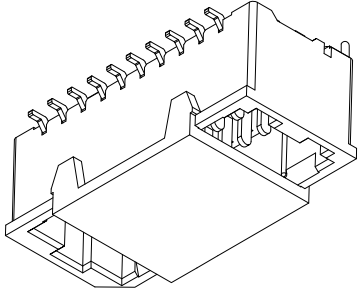

Poles	Dimensions(mm)	
	A	B
10	4.00	7.30
12	5.00	8.30
16	7.00	10.30
20	9.00	12.30
30	14.00	17.30
40	19.00	22.30
50	24.00	27.30

SPECIFICATIONS

- 1.Voltage rating: 50V AC, DC
- 2.Current rating: 1A, AC, DC
- 3.Withstanding Voltage: 500V AC/minute
4. Insulation resistance: 100M min
5. Temperature range: -25 ° C +85 ° C
6. Contact resistance: 20m max

WAFER
Housing Material: PA9T UL 94V0
Pin Material: Phosphor Bronze or Brass
Contact Area Plating: Plated Tin or Plated Gold
Mates with: P1010 series Housing
Poles: 02-20P
Part No.: M1010VS-2xXX-9T-R
R=卷装 无=管装
Pin位数

VER	MODIFICATION		DATE	XXX	±0.03	° .XXX	±0.5°	VIEW	⊙	PART. NO.	M1010VS-2xXX-9T	DWG NO.	009
A0				.XX	±0.08	° .XX	±1°	APPD		PRODUCT NAME	1.00mm Crimp Style Connectors	SCALE	1:1
				.X	±0.20	° .X	±2°	CHKD		CONNECTORS XFCN CONNECTORS CO., LTD.	XFCN 兴飞连接器有限公司	UNITS	mm
				X.	±0.30	° .X	±5°	DRAWN	CK tan	TOLERANCE UNLESS OTHERWISE		DATE	2010.4.12
										SHEET		1/1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)