




环保物料

TEL: 0769-82001899

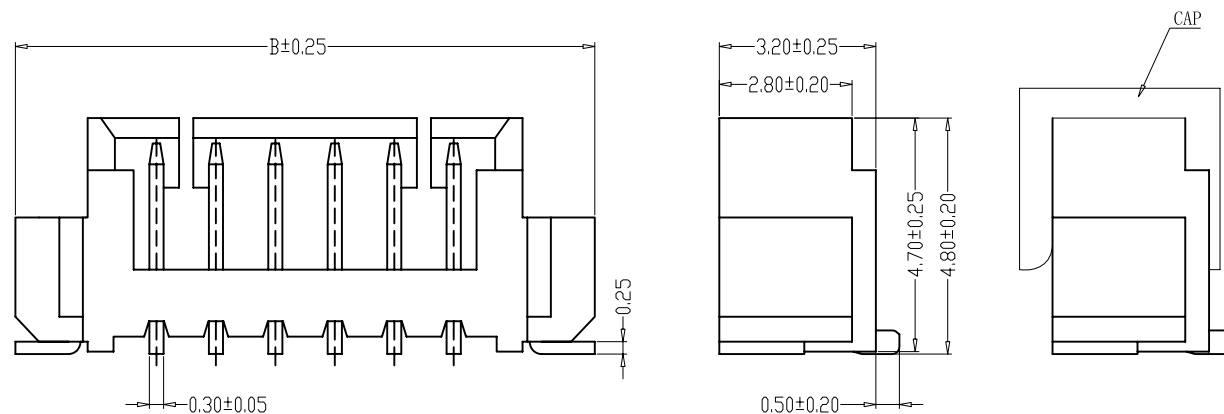

**SPECIFICATIONS**

- 1.Voltage rating: 125V AC, DC
  - 2.Current rating: 1A, AC, DC
  - 3.Withstanding Voltage: 500V AC/minute
  - 4.Insulation resistance:100M min
  - 5.Temperature range: -25 ° C-+85 ° C
  - 6.Contact resistance: 20m max
- WAFER  
 Housing Material: LCP UL 94V0  
 Pin Material: Phosphor Bronze or Brass  
 Contact Area Plating: Plated Tin or Plated Gold  
 Mates with :P1250 series Housing  
 Poles:02-20P  
 Part No.: M1250VS-xxP

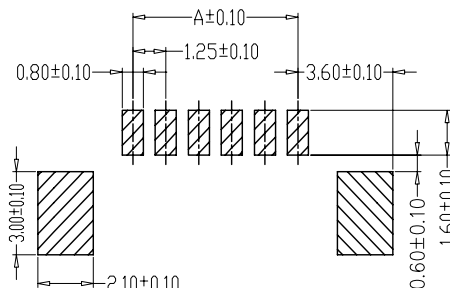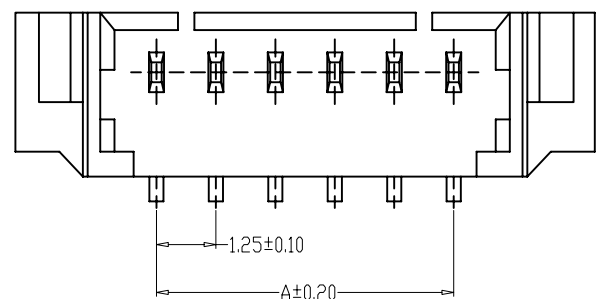

Pin位数

编号	尺寸 (mm)	
	A	B
02	1.25	7.35
03	2.50	8.60
04	3.75	9.85
05	5.00	11.10
06	6.25	12.35
07	7.50	13.60
08	8.75	14.85
09	10.00	16.10
10	11.25	17.35
11	12.50	18.60
12	13.75	19.85
20	23.75	29.85

**PCB LAYOUT**

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	<b>XFCN</b> 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1
				X. ±0.30 X° ±5°	CHKD				DATE	2020.04.12
				.X ±0.20 .X° ±2°	APPD	PRODUCT NAME	1.25mm Crimp Style Connectors		UNITS	mm
				.XX ±0.08 .XX° ±1°	VIEW	PART. NO.	M1250VS-xxP		SCALE	1:1
AO	MODIFICATION	DRAW	DATE	.XXX ±0.03 .XXX° ±0.5°				DWG NO.	009	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)  
[001000](#)