



环保物料

TEL: 0769-82001899


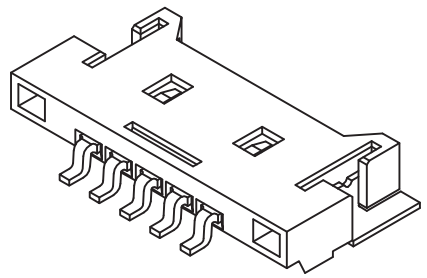


SPECIFICATIONS

- 1.Voltage rating: 125V AC, DC
  - 2.Current rating: 1A, AC, DC
  - 3.Withstanding Voltage: 250V AC/minute
  - 4.Insulation resistance:100M min
  - 5.Temperature range: -25 °C-+85 °C
  - 6.Contact resistance: 20m max
- WAFER  
 Housing Material: PA9T UL 94V0  
 Pin Material: Phosphor Bronze or Brass  
 Contact Area Plating: Plated Tin or Plated Gold  
 Mates with :P1258 series Housing  
 Poles:02-30P

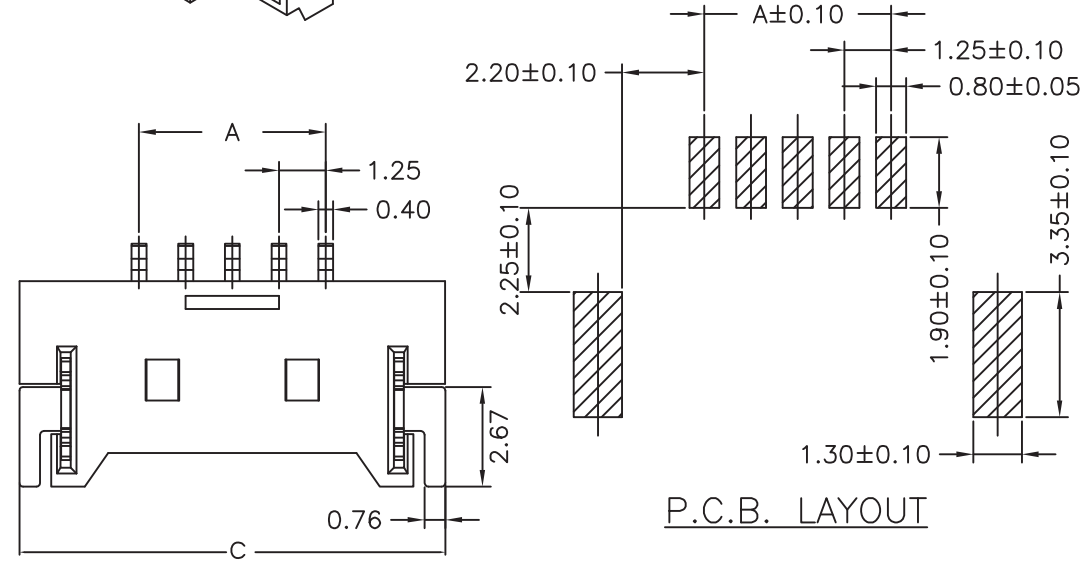

P.C.B. LAYOUT

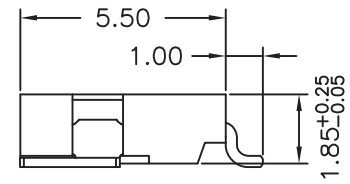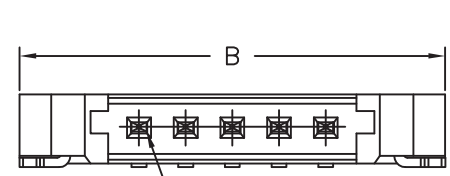

Unit: mm

| PART NO. | Dimensions |       |       |
|----------|------------|-------|-------|
|          | A          | B     | C     |
| 02P      | 1.25       | 7.65  | 7.60  |
| 03P      | 2.50       | 8.90  | 8.85  |
| 04P      | 3.75       | 10.15 | 10.10 |
| 05P      | 5.00       | 11.40 | 11.35 |
| 06P      | 6.25       | 12.65 | 12.60 |
| 07P      | 7.50       | 13.90 | 13.85 |
| 08P      | 8.75       | 15.15 | 15.10 |
| 09P      | 10.00      | 16.40 | 16.35 |
| 10P      | 11.25      | 17.65 | 17.55 |
| 11P      | 12.50      | 18.90 | 18.85 |
| 12P      | 13.75      | 20.15 | 20.10 |
| 13P      | 15.00      | 21.40 | 21.35 |
| 14P      | 16.25      | 22.65 | 22.60 |
| 15P      | 17.50      | 23.90 | 23.85 |
| 16P      | 18.75      | 25.15 | 25.10 |
| 20P      | 23.75      | 30.15 | 30.10 |
| 30P      | 36.25      | 42.65 | 42.60 |

|    |              |      |      |                            |       |        |   |                               |              |     |
|----|--------------|------|------|----------------------------|-------|--------|---|-------------------------------|--------------|-----|
|    |              |      |      | TOLERANCE UNLESS OTHERWISE | DRAWN | CK tan | <b>XFCN</b> 兴飞连接器有限公司<br>XFCN CONNECTORS CO.,LTD. | SHEET                         | 1/1          |     |
|    |              |      |      | X. ±0.30 X° ±5°            | CHKD  |        |   | DATE                          | 2020. 04. 12 |     |
|    |              |      |      | .X ±0.20 .X° ±2°           | APPD  |        |   | UNITS                         | mm           |     |
|    |              |      |      | .XX ±0.08 .XX° ±1°         | VIEW  | ⊕      |   | SCALE                         | 1:1          |     |
| AO | MODIFICATION | DRAW | DATE | .XXX ±0.03 .XXX° ±0.5°     |       |        | PRODUCT NAME                                      | 1.25mm Crimp Style Connectors | DWG NO.      | 009 |
| 1  | 2            | 3    | 4    | 5                          | 6     | 7      | PART. NO.   | M1258RS-xxP                   | 8            | 9   |
| 10 |              |      |      |                            |       |        |   |                               |              |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#)  
[63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#)  
[65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#)  
[70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [FCN-367T-T012/H](#) [80.063.4001.1](#)  
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-014-20-](#)  
[001000](#)