





| DIM | PIN  | A     | B    | C |
|-----|------|-------|------|---|
| 2P  | 2.0  | 4.75  | 6.0  |   |
| 3P  | 4.0  | 6.75  | 8.0  |   |
| 4P  | 6.0  | 8.75  | 10.0 |   |
| 5P  | 8.0  | 10.75 | 12.0 |   |
| 6P  | 10.0 | 12.75 | 14.0 |   |
| 7P  | 12.0 | 14.75 | 16.0 |   |
| 8P  | 14.0 | 16.75 | 18.0 |   |
| 9P  | 16.0 | 18.75 | 20.0 |   |
| 10P | 18.0 | 20.75 | 22.0 |   |
| 11P | 20.0 | 22.75 | 24.0 |   |
| 12P | 22.0 | 24.75 | 26.0 |   |
| 13P | 24.0 | 26.75 | 28.0 |   |
| 14P | 26.0 | 28.75 | 30.0 |   |
| 15P | 28.0 | 30.75 | 32.0 |   |
| 16P | 30.0 | 32.75 | 34.0 |   |

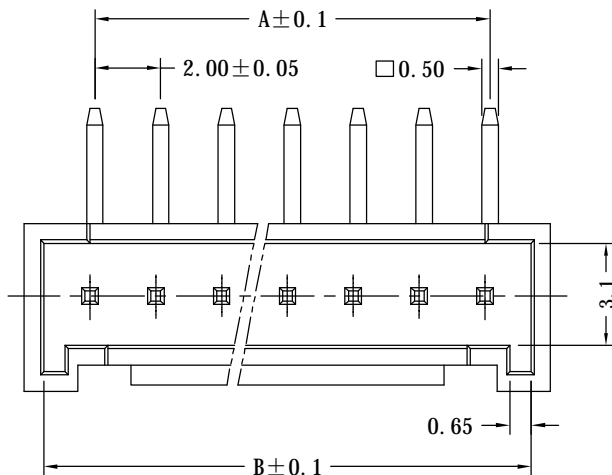

P.C.B. Layout

SPECIFICATIONS

Voltage rating: 250V AC, DC  
 Current rating: 3A, AC, DC  
 Withstanding Voltage: 1000V AC/minute  
 Insulation resistance: 1000M min  
 Temperature range: -25 °C ~ +85 °C  
 Contact resistance: 30m max  
 Housing Material: Nylon66 UL94V-0  
 Pin Material: Brass  
 Contact Area Plating: Tin-Plated  
 Part No.: M2016R-XX-N0

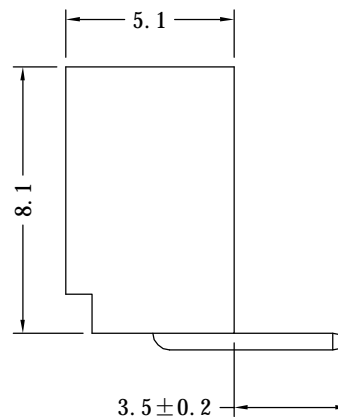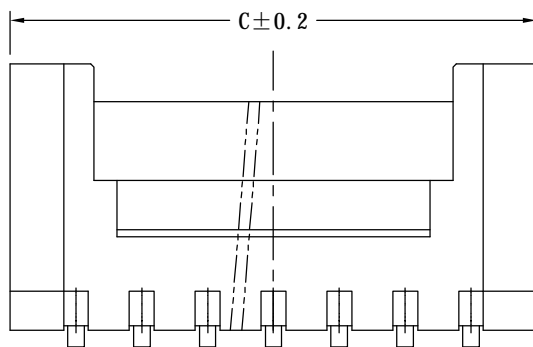

|    |              |  |  |                            |       |       |        |   |              |                               |          |
|----|--------------|--|--|----------------------------|-------|-------|--------|---|--------------|-------------------------------|----------|
|    |              |  |  | TOLERANCE UNLESS OTHERWISE |       | DRAWN | CK tan | <b>XFCN</b> 兴飞连接器有限公司<br>CONNECTORS XFCN CONNECTORS CO., LTD. |              | SHEET                         | 1/1      |
|    |              |  |  | X.                         | ±0.30 | X°    | ±5°    |   |              | CHKD                          | DATE     |
|    |              |  |  | .X                         | ±0.20 | .X°   | ±2°    | APPD  | PRODUCT NAME | 2.00mm Crimp Style Connectors |          |
|    |              |  |  | .XX                        | ±0.08 | .XX°  | ±1°    | VIEW  | PART. NO.    | SCALE                         | 1:1      |
|    |              |  |  | .XXX                       | ±0.03 | .XXX° | ±0.5°  |   |              | M2016R-XX-N0                  | DWG. NO. |
| AO | MODIFICATION |  |  | DRAW                       | DATE  |       |        |   |              |                               |          |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [XFCN](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)