

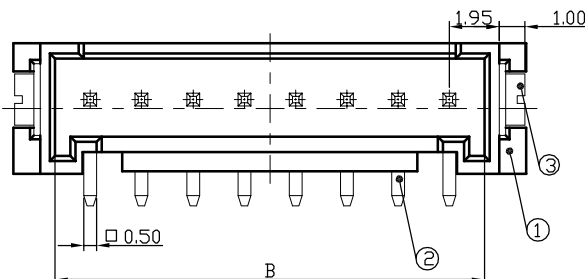


PHB Receptacle + PHB Header



■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

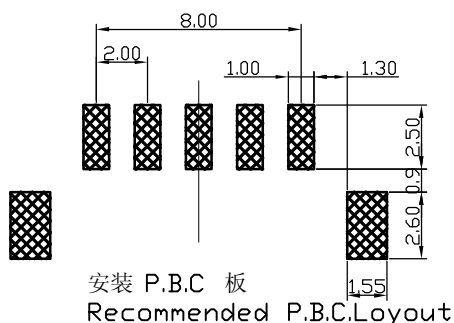

| PIN | A | B | C |
|-----|------|-------|------|
| 2 | 2.0 | 4.75 | 8.0 |
| 3 | 4.0 | 6.75 | 10.0 |
| 4 | 6.0 | 8.75 | 12.0 |
| 5 | 8.0 | 10.75 | 14.0 |
| 6 | 10.0 | 12.75 | 16.0 |
| 7 | 12.0 | 14.75 | 18.0 |
| 8 | 14.0 | 16.75 | 20.0 |
| 9 | 16.0 | 18.75 | 22.0 |
| 10 | 18.0 | 20.75 | 24.0 |
| 11 | 20.0 | 22.75 | 26.0 |
| 12 | 22.0 | 24.75 | 28.0 |
| 13 | 24.0 | 26.75 | 30.0 |
| 14 | 26.0 | 28.75 | 32.0 |
| 15 | 28.0 | 30.75 | 34.0 |
| 16 | 30.0 | 32.75 | 36.0 |

| | | | | | | | | | | | |
|----|--------------|--|------|----------------------------|-------|-------|--------|---|--------------|-------------------------------|------|
| | | | | TOLERANCE UNLESS OTHERWISE | | DRAWN | CK tan | XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD. | | SHEET | 1/1 |
| | | | | X. | ±0.30 | X° | ±5° | | | CHKD | DATE |
| | | | | .X | ±0.20 | .X° | ±2° | APPD | PRODUCT NAME | 2.00mm Crimp Style Connectors | |
| | | | | .XX | ±0.08 | .XX° | ±1° | VIEW | PART. NO. | M2016VS-XX-XX | |
| AO | MODIFICATION | | DATE | .XXX | ±0.03 | .XXX° | ±0.5° | | | DWG NO. | 009 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [XFCN](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)